


Switch Disconnecter, 4-pole, 200A for remote operation

Device category switch disconnector for remote release, Size type 2, Rated current 200A, Poles 4, IP Rating IP20, Tripping Unit without protection

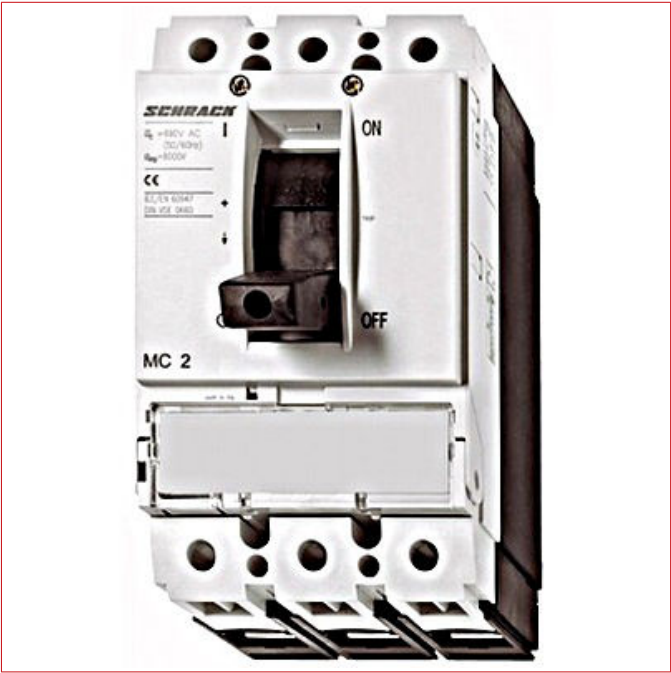


Technical Data

Net width (mm)	140,00
Net height (mm)	184,00
Net weight (kg)	2,65
EAN	9004840386080
Power loss (W)	30,70
Min. ambient temperature (°C)	-25
Max. ambient temperature (°C)	60
Device category	switch disconnector for remote release
Rated current (A)	200
Size type	2
Tripping Unit	without protection
Poles	4
Standard	IEC EN 60947 VDE 0660
Short-circuit protection maximum fuse	250
Mech. shock resistance Half-sinusoidal shock 10ms	20

Technical Data - continued

IP Rating	IP20
Rated operational current (A)	200
Overvoltage category/pollution degree	III/3
Rated insulation voltage [Ui] (V)	690
Short circuit making capacity (kA)	5,50
AC-1	
400 V	7500
415 V	7500
660 V 690 V (A)	5000
AC-23A	4000
Solid [main cable] (mm ²)	2 x (6 - 16)
	1 x (10 - 16)
Stranded [main cable] (mm ²)	2 x (25 - 70)
	1 x (25 - 185)

Dimensioned drawing: Switch Disconnecter, 4-pole, 200A for remote operation

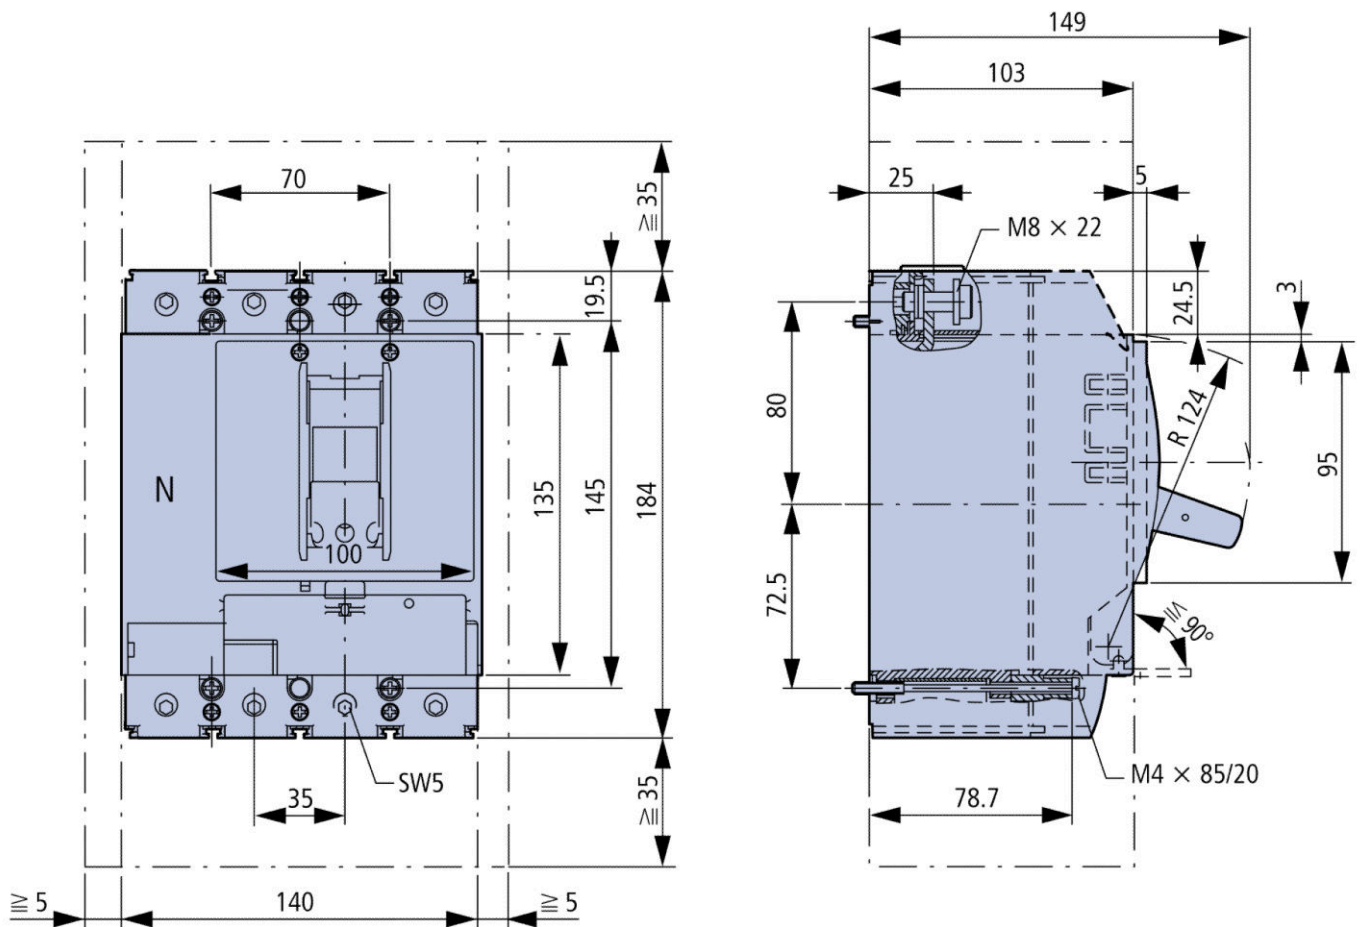

DESCRIPTION	Order No.
Switch Disconnecter, 4-pole, 200A for remote operation	
Device category switch disconnecter for remote release, Size type 2, Rated current 200A, Poles 4, IP Rating IP20, Tripping Unit without protection	MC220045