

Data Sheet for Article: MC225243R-

Moulded Case Circuit Breaker Type VE, 4-pole, 50kA, 250/160A

Size type 2, Rated current 250A, Poles 4, IP Rating IP20, Short circuit switching capacity 50kA, Tripping Unit VE electronically delayed system, cable, selective and generator protection, reduced neutral conductor



Technical Data

Net width (mm)	140,00
Net height (mm)	184,00
Net weight (kg)	3,00
EAN	9004840587432
Power loss (W)	52,00
Min. ambient temperature (°C)	-25
Max. ambient temperature (°C)	60
Standard	IEC EN 60947 VDE 0660
Device category	circuit breaker
Rated current (A)	250
Rated voltage	< 690VAC
Short circuit switching capacity (kA)	50
Size type	2

Technical Data - continued

Tripping Unit	VE electronically delayed system, cable, selective and generator protection, reduced neutral conductor
Poles	4
Short circuit current	250A/160A
Protection against direct contact	finger-proof and back-of-hand-proof according to VDE 0106 Part 100
Climatic proofing	Damp heat, constant, to IEC 60068-2-78 Damp heat, cyclic, to IEC 60068-2-30
Mech. shock resistance Half-sinusoidal shock 10ms	20 (Halbsinusstoß 20 ms)
IP Rating	IP20
Rated insulation voltage [Ui] (V)	1000
Mechanical durability	20000 operation cycles
Electrical endurance (Operation cycle)	10000
Terminal type	Screw terminal
Rated short-time withstand current Icw	1,9kA

GENERAL DATA - MC2, MC3, MC4

Standards and regulations	IEC/EN 60947, VDE 0660
Protection against accidental contact	Finger and back-of-hand proof to VDE 0106 Part 100
Climate resistance	Damp heat, constant to IEC 60068-2-78 Damp heat, ciclical to IEC 60068-2-30
Ambient temperature	
Storage	-25...+70°C
Operation	-25...+70°C
Impact resistance (IEC/EN 60068-2-27)	20 (half-sinusidal shock 20 ms)
Safe isolation to EN 61140	
between auxiliary contacts and main circuits	500V AC
between auxiliary contacts	300V AC

Datei Tabelle: Moulded Case Circuit Breaker Type VE, 4-pole, 50kA, 250/160A

Mounting position

vertical and 90° in all directions



Direction of power supply	any
Degree of protection	
Device	in region of component parts: IP20 (basic degree of protection)
Housing	with insulating surround: IP40
	with door coupling rotary handle: IP66
Connectors	Tunnel terminal: IP10
	Phase isolator and strip terminal: IP00

DIELECTRIC STRENGTH OF MCCB - MC2

	Max. rated uninterrupted current 250A		
	MC2 - 25kA	MC2 - 50kA	MC2 - 100kA
Rated impulse withstand voltage U_{imp}			
Main circuits	8000V	8000V	8000V
Auxiliary circuits	6000V	6000V	6000V
Rated operational voltage U_e	690V AC	690V AC	690V AC
Rated operational voltage breaking via 3 conductors	-	750V DC ¹⁾	750V DC ¹⁾
Surge protection/ pollution degree	III/3	III/3	III/3
Rated insulation voltage U_i	1000V ²⁾	1000V	1000V
Range of application in IT networks	440V	690V	690V


Note:

¹⁾ For rated operational voltage breaking via 3 conductors, the following applies: DC correction factor for Instantaneous release response value:

MC1: 1,25

Setting for I_i at DC = setting I_i AC/correction factor DC

Value applies to 3-pole protection devices with thermomagnetic release MC1



1 * Breaking one pole via two circuits in series

2 * Breaking one pole via three circuits in series

BREAKING CAPACITY - MC2

Max. rated uninterrupted current

MC2 - 25kA MC2 - 50kA MC2 - 150kA

Rated short-circuit breaking capacity values I_{cm}

240V	63kA	187kA	330kA
400/415V	53kA	105kA	330kA
440V	53kA	74kA	286kA
525V	-	53kA	105kA
690V	-	40kA	40kA

Rated short-circuit breaking capacity value I_{cn}/I_{cs}

I_{cu} meets IEC/EN 60947	240V 50/60 Hz	30kA	85kA	150kA
Breaking sequence O-t-CO	400/415V 50/60Hz	25kA	50kA	150kA
	440V 50/60Hz	25kA	35kA	130kA
	525V 50/60Hz	-	25kA	50kA
	690V 50/60Hz	-	20kA	20kA
	500V DC	-	30kA	60kA
	750V DC	-	30kA	60kA
I_{cs} meets IEC/EN 60947	240V 50/60Hz	30kA	85kA	150kA
Breaking sequence O-t-CO-t-CO	400/415V 50/60Hz	25kA	50kA	150kA
	440V 50/60Hz	18,5kA	35kA	130kA
	525V 50/60Hz	-	25kA	37,5kA
	690V 50/60Hz	-	5kA	5kA

Maximum HBC fuse $\leq 1600A$

355A gG/gL

Utilization category to IEC/EN 60947-2

A A A

Rated short-time withstand current I_{cw}

$t = 0,3s$	-	1,9kA	1,9kA
$t = 1s$	-	1,9kA	1,9kA

Rated making and breaking capacity I_e

Rated operating current	AC-1	400/415V 50/60Hz	300A	300A	300A
		690V 50/60Hz	250A	250A	250A
	AC-3	400/415V 50/60Hz	300A	300A	300A
		690V 50/60Hz	250A	250A	250A
	DC-1	500V DC with thermal release	-	250A	250A
		750V DC with thermal release	-	250A	250A
	DC-3	500V DC with thermal release	-	250A	250A
		750V DC with thermal release	-	250A	250A

LIFETIME - MC2

		Max. rated uninterrupted current		
		MC2 - 25kA	MC2 - 50kA	MC2 - 150kA
Service life, mechanical (operations)		20000	20000	20000
Maximum operating cycles		120 S/h	120 S/h	120 S/h
Service life, electrical				
AC-1	400/415V 50/60Hz	10000 ¹⁾	10000	10000
	690V 50/60Hz	-	7500	7500
AC-3	400/415V 50/60Hz	6500 ²⁾	6500	6500
	690V 50/60Hz	-	5000	5000
DC-1	500V with thermal release	-	7500	7500
	750V with thermal release	-	7500	7500
DC-3	500V with thermal release	-	3000	3000
	750V with thermal release	-	3000	3000
Current heat loss per pole at I_u ¹⁾		19kW	19kW	19kW
Total disconnecting time at short-circuit		<10ms	<10ms	<10ms

¹⁾ The current heat loss per pole ratings refer to the maximum current rating for the particular frame size.

CONNECTION CROSS SECTIONS

			MC2	I _n ¹⁾
Standard equipment			Screw connection	-
Accessories			Box terminal	
			Tunnel terminals	
			Rear-side connection	
Cu-conductors, Cu-cable				
Box terminal	solid		1 x (10 - 16)mm ²	300A
			2 x (4 - 16)mm ²	
	stranded		1 x (25 - 185)mm ²	
			2 x (25 - 70)mm ²	
Tunnel terminal	solid		1 x 16mm ²	300A
	stranded	1-hole	1 x (25-185)mm ²	
		2-hole	-	-
		4-hole	-	-
Screw connection and rear-side connection				
directly on switch	solid		1 x (4 - 16)mm ²	300A
			2 x (4 - 16)mm ²	
	stranded		1 x (25 - 185)mm ²	
			2 x (25 - 70)mm ²	
Module plate	1-hole	min.	-	-
		max.	-	-
Moudle plate	2-hole	min.	-	-
		max.	-	-
Connection extension			-	-
Al-conductors, Al-cable				
Tunnel terminal	solid		1 x 16mm ²	250A
	stranded	1-hole	1 x (25 - 185)mm ²	
		2-hole	-	-
			-	-
	4-hole	-	-	
Screw connection and rear-side connection				
directly on switch	solid		1 x (10 - 16)mm ²	250A
			2 x (10 - 16)mm ²	
	stranded		1 x (25 - 50)mm ²	
			2 x (25 - 50)mm ²	
Module plate	1-hole	min.	-	-
		max.	-	-
Module plate			2-hole	-
Connection extension			-	-
Cu-strip (number of segments x width x segment thickness)				
Box terminal		min.	2 x 9 x 0,8mm	300A
		max.	10 x 16 x 0,8(2 x) 8 x 15,5 x 0,8	
Flat conductor terminal, basic		min.	-	-
		max.	-	-
Module plate			1-hole	-

Screw connection and rear-side connection

Cu-strip, with holes	min.	2 x 16 x 0,8	300A
	max.	10 x 24 x 0,8	
Connection extension		-	-


Cu-rail (width x thickness)

Screw connection and rear-side connection

Screw connection		M8	-
directly on switch	min.	16 x 5mm	300A
	max.	24 x 8mm	
Module plate 1-hole	min.	-	-
	max.	-	-
Module plate 2-hole		-	-
Connection extension	min.	-	-
	max.	-	-

Note: ¹⁾ The rated currents I_n have been calculated in accordance with IEC/EN 60947 (protection devices standard) and generally relate to the max. specified cross-sections and are used here for the purposes of orientation. The design standards which apply in each case must be observed.

Dimensioned drawing: Moulded Case Circuit Breaker Type VE, 4-pole, 50kA, 250/160A

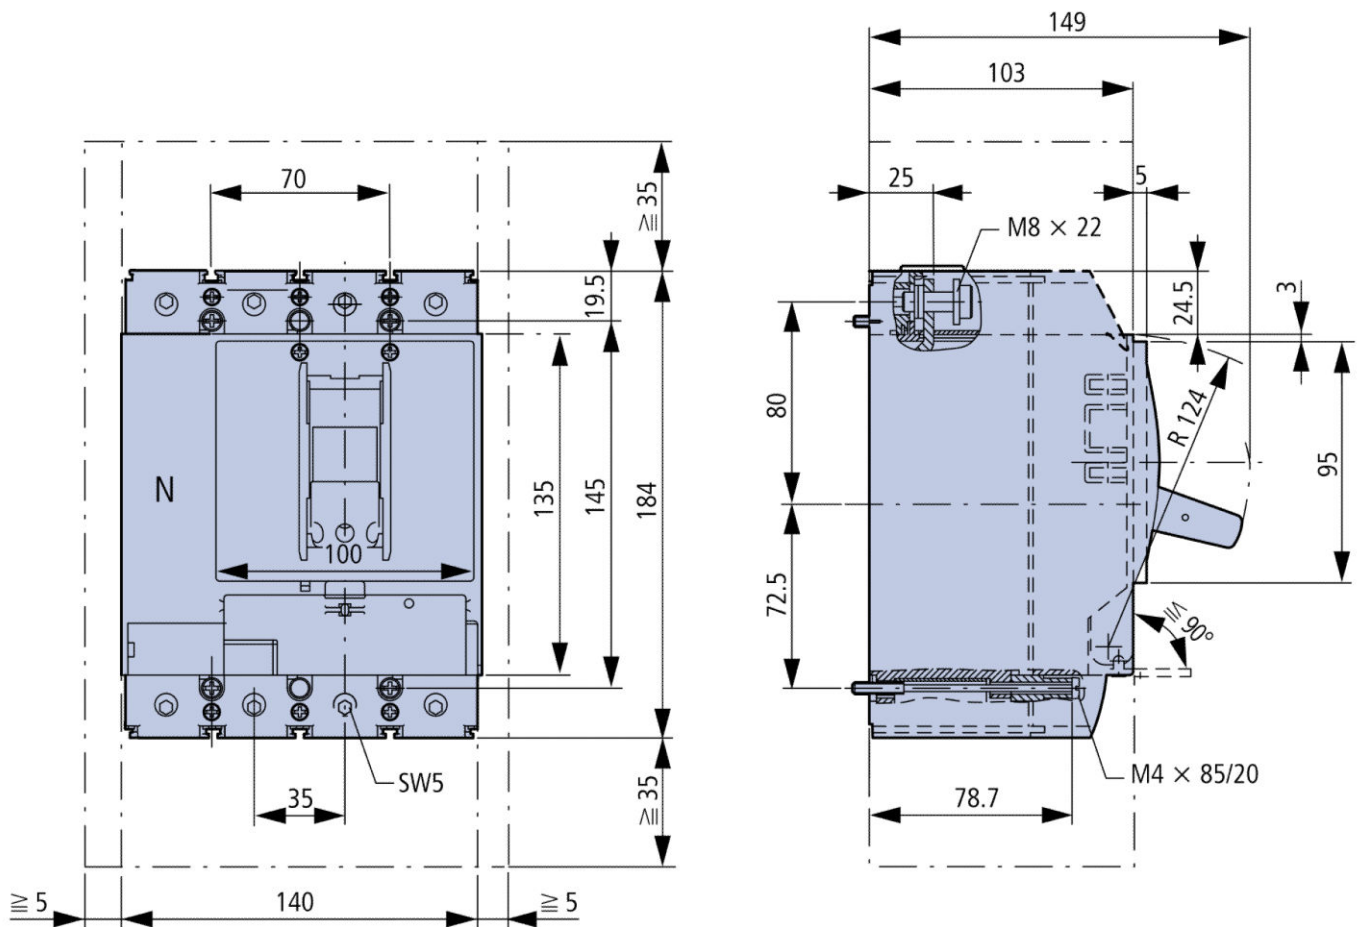

DESCRIPTION	Order No.
Moulded Case Circuit Breaker Type VE, 4-pole, 50kA, 250/160A Size type 2, Rated current 250A, Poles 4, IP Rating IP20, Short circuit switching capacity 50kA, Tripping Unit VE electronically delayed system, cable, selective and generator protection, reduced neutral conductor	MC225243R