

Data Sheet for Article: MC363243R-

Moulded Case Circuit Breaker Type VE, 4P, 50kA, 630/400A

Size type 3, Rated current 630A, Poles 4, IP Rating IP20, Short circuit switching capacity 50kA, Tripping Unit VE electronically delayed system, cable, selective and generator protection, reduced neutral conductor



Technical Data

Net width (mm)	185,00
Net height (mm)	275,00
Net weight (kg)	8,40
EAN	9004840587470
Power loss (W)	119,00
Min. ambient temperature (°C)	-25
Max. ambient temperature (°C)	60
Standard	IEC EN 60947 VDE 0660
Device category	circuit breaker
Rated current (A)	630
Rated voltage	< 690VAC
Short circuit switching capacity (kA)	50
Size type	3

Technical Data - continued

Tripping Unit	VE electronically delayed system, cable, selective and generator protection, reduced neutral conductor
Poles	4
Short circuit current	630A
Protection against direct contact	finger-proof and back-of-hand-proof according to VDE 0106 Part 100
Climatic proofing	Damp heat, constant, to IEC 60068-2-78 Damp heat, cyclic, to IEC 60068-2-30
Mech. shock resistance Half-sinusoidal shock 10ms	20 (Halbsinusstoß 20 ms)
IP Rating	IP20
Rated insulation voltage [Ui] (V)	1000
Mechanical durability	20000 operation cycles
Electrical endurance (Operation cycle)	10000
Terminal type	Screw terminal
Rated short-time withstand current Icw	3,3kA

GENERAL DATA - MC2, MC3, MC4

Standards and regulations	IEC/EN 60947, VDE 0660
Protection against accidental contact	Finger and back-of-hand proof to VDE 0106 Part 100
Climate resistance	Damp heat, constant to IEC 60068-2-78 Damp heat, ciclical to IEC 60068-2-30
Ambient temperature	
Storage	-25...+70°C
Operation	-25...+70°C
Impact resistance (IEC/EN 60068-2-27)	20 (half-sinusidal shock 20 ms)
Safe isolation to EN 61140	
between auxiliary contacts and main circuits	500V AC
between auxiliary contacts	300V AC

Datei Tabelle: Moulded Case Circuit Breaker Type VE, 4P, 50kA, 630/400A

Mounting position

vertical and 90° in all directions



Direction of power supply	any
Degree of protection	
Device	in region of component parts: IP20 (basic degree of protection)
Housing	with insulating surround: IP40
	with door coupling rotary handle: IP66
Connectors	Tunnel terminal: IP10
	Phase isolator and strip terminal: IP00

DIELECTRIC STRENGTH OF MCCB - MC3

	Max. rated uninterrupted current 630A		
	MC3 - 36kA	MC3 - 50kA	MC3 - 150kA
Rated impulse withstand voltage U_{imp}			
Main circuits	8000V	8000V	8000V
Auxiliary circuits	6000V	6000V	6000V
Rated operational voltage U_e	690V AC	690V AC	690V AC
Rated operational voltage breaking via 3 conductors	-	750V DC ¹⁾	750V DC ¹⁾
Surge protection/ pollution degree	III/3	III/3	III/3
Rated insulation voltage U_i	1000V ²⁾	1000V	1000V
Range of application in IT networks	690V	690V	690V


Notes:

¹⁾ For rated operational voltage breaking via 3 conductors, the following applies: DC correction factor for instantaneous release response value:

MC3: 1,35

Setting for I_i at DC = setting I_i AC/correction factor DC

Value applies to 3-pole protection devices with thermomagnetic release MC3



1 * Breaking one pole via two circuits in series

2 * Breaking one pole via three circuits in series

²⁾ For 3-pole protection devices, the following applies: 690V

BREAKING CAPACITY - MC3

Max. rated uninterrupted current 630A

MC3 - 36kA MC3 - 50kA MC3 - 150kA

Rated short-circuit breaking capacity values I_{cm}

240V	121kA	187kA	330kA
400/415V	76kA	105kA	330kA
440V	63kA	74kA	286kA
525V	24kA	53kA	143kA
690V	14kA	40kA	40kA

Rated short-circuit breaking capacity value I_{cn}/I_{cs}

I_{cu} meets IEC/EN 60947	240V 50/60 Hz	55kA	85kA	150kA
Breaking sequence O-t-CO	400/415V 50/60Hz	36kA	50kA	150kA
	440V 50/60Hz	30kA	35kA	130kA
	525V 50/60Hz	12kA	25kA	65kA
	690V 50/60Hz	8kA	20kA	35kA
	500V DC	-	30kA	70kA
	750V DC	-	30kA	70kA
I_{cs} meets IEC/EN 60947	240V 50/60Hz	55kA	50kA	150kA
Breaking sequence O-t-CO-t-CO	400/415V 50/60Hz	36kA	50kA	50kA
	440V 50/60Hz	22,5kA	35kA	130kA
	525V 50/60Hz	9kA	13kA	33kA
	690V 50/60Hz	4kA	5kA	9kA

Maximum HBC fuse $\leq 1600A$

MC3-...250, 400: 400A gG/gL

MC3-...630: 630A gG/gL

Utilization category to IEC/EN 60947-2

A A A

Rated short-time withstand current I_{cw}

$t = 0,3s$	3,3kA	3,3kA	3,3kA
$t = 1s$	3,3kA	3,3kA	3,3kA

Rated making and breaking capacity I_e

Rated operating current	AC-1	400/415V 50/60Hz	500A	630A	630A
		690V 50/60Hz	500A	630A	630A
	AC-3	400/415V 50/60Hz	450A	450A	450A
		690V 50/60Hz	450A	450A	450A
	DC-1	500V DC with thermal release	-	500A	500A
		750V DC with thermal release	-	500A	500A
	DC-3	500V DC with thermal release	-	500A	500A
		750V DC with thermal release	-	500A	500A

LIFETIME - MC3

Max. rated uninterrupted current 630A			
	MC3 - 36kA	MC3 - 50kA	MC3 - 150kA
Service life, mechanical (operations)	15000	15000	15000
Maximum operating cycles	60 S/h	60 S/h	60 S/h
Service life, electrical			
AC-1 400/415V 50/60Hz	5000	5000	5000
690V 50/60Hz	3000	3000	3000
AC-3 400/415V 50/60Hz	2000	2000	2000
690V 50/60Hz	2000	2000	2000
DC-1 500V with thermal release	-	5000	5000
750V with thermal release	-	5000	5000
DC-3 500V with thermal release	-	2000	2000
750V with thermal release	-	2000	2000
Current heat loss per pole at I_u ¹⁾	31W	31W	31W
Total disconnecting time at short-circuit	<10ms	<10ms	<10ms

¹⁾ The current heat loss per pole ratings refer to the maximum current rating for the particular frame size.

CONNECTION CROSS SECTIONS

				MC3	I _n ¹⁾
Standard equipment				Screw connection	-
Accessories				Box terminal Tunnel terminals Rear-side connection	
Cu-conductors, Cu-cable					
Box terminal	solid	2 x 16mm ²			500A
	stranded	1 x (35 - 240)mm ²			
		2 x (25 - 120)mm ²			
Tunnel terminal	solid	-			-
	stranded	1-hole	1 x (25-185)mm ²		350A
		2-hole	1 x (50 - 240)mm ²		630A
		2 x (50 - 240)mm ²		2 x 185A	
		4-hole	-		-
Screw connection and Rear-side connection					
directly on switch	solid	1 x 16mm ²			630A2 x 185A
		2 x 16mm ²			
	stranded	1 x (25 - 240)mm ²			
		2 x (25 - 240)mm ²			
Module plate	1-hole	min.	-		-
		max.	-		-
Module plate	2-hole	min.	-		-
		max.	-		-
Connection extension				2 x 300mm ²	630A2x185
Al-conductors, Al-cable					
Tunnel terminal	solid	1 x 16mm ²			350A
	stranded	1-hole	1 x (25 - 185) ²⁾ mm ²		
		2-hole	1 x (50 - 240)mm ²		630A
		2 x (50-240)mm ²			
		4-hole	-		-
Screw connection and Rear-side connection					
directly on switch	solid	1 x 16mm ²			400A
		2 x (10 - 16)mm ²			
	stranded	1 x (25 - 120)mm ²			
		2 x (25 - 120)mm ²			
Module plate	1-hole	min.	-		-
		max.	-		-
Module plate	2-hole	-			-
Connection extension				-	-
Cu-strip (number of segments x width x segment thickness)					
Box terminal		min.	6 x 16 x 0,8mm		630A
		max.	10 x 24 x 1,0mm		
			+5 x 24 x 1,0mm		
			(2x) 8 x 24 x1,0mm		
Flat conductor terminal, basic		min.	-		-
		max.	-		-

Module plate	1-hole	-	-
Screw connection and Rear-side connection			
Cu-strip, with holes		min.	6 x 16 x 0,8mm
		max.	10 x 32 x 1,0mm
			+5 x 32 x 1,0mm
Connection extension			(2x) 10 x 50 x 1,0mm
Cu-rail (width x thickness)			
Screw connection and Rear-side connection			
Screw connection		M10	-
directly on switch		min.	20 x 5mm
		max.	30 x 10mm
			+30 x 5mm
Module plate	1-hole	min.	-
		max.	-
Module plate	2-hole	-	-
Connection extension		min.	-
		max.	2 x (10 x 50)


630A

630A

630A 10 x 40

- Notes:**
- 1) The rated currents I_n have been calculated in accordance with IEC/EN 60947 (protection devices standard) and generally relate to the max. specified cross-sections and are used here for the purpose of orientation. The design standards which apply in each case must be observed.
- 2) Depending on the cable manufacturer up to 240mm² can be connected.

**Dimensioned drawing: Moulded Case Circuit Breaker Type VE, 4P, 50kA,
630/400A**

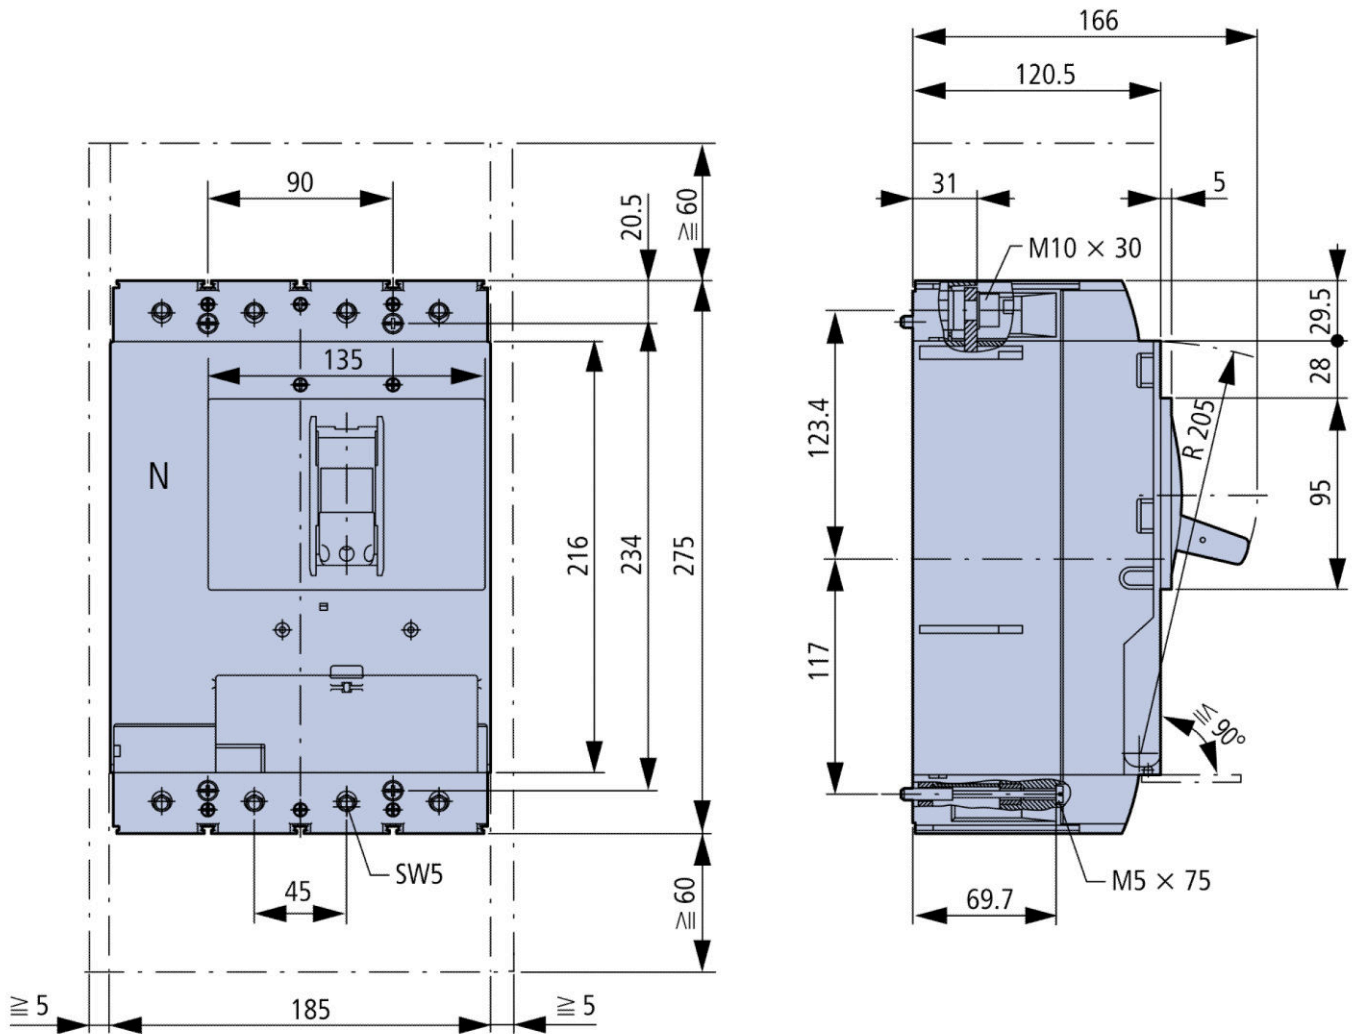

DESCRIPTION	Order No.
Moulded Case Circuit Breaker Type VE, 4P, 50kA, 630/400A Size type 3, Rated current 630A, Poles 4, IP Rating IP20, Short circuit switching capacity 50kA, Tripping Unit VE electronically delayed system, cable, selective and generator protection, reduced neutral conductor	MC363243R