

Data Sheet for Article: MC412045--

Switch Disconnecter, 4-pole, 1250A for remote operation

Device category switch disconnector for remote release, Size type 4, Rated current 1250A, Poles 4, IP Rating IP20, Tripping Unit without protection




Technical Data

Net width (mm)	280,00
Net height (mm)	401,00
Net weight (kg)	27,00
EAN	9004840386752
Power loss (W)	173,00
Min. ambient temperature (°C)	-25
Max. ambient temperature (°C)	60
Device category	switch disconnector for remote release
Rated current (A)	1250
Size type	4
Tripping Unit	without protection
Poles	4
Standard	IEC EN 60947 VDE 0660
Short-circuit protection maximum fuse	1600
IP Rating	IP20

Technical Data - continued

Rated operational current (A)	1250
Overvoltage category/pollution degree	III/3
Rated insulation voltage [Ui] (V)	1000
Short circuit making capacity (kA)	53
AC-1	
400 V	3000
415 V	3000
660 V 690 V (A)	2000
AC-23A	1000
Stranded [main cable] (mm ²)	1 x (120 - 185)
	4 x (50 - 185)

Dimensioned drawing: Switch Disconnecter, 4-pole, 1250A for remote operation

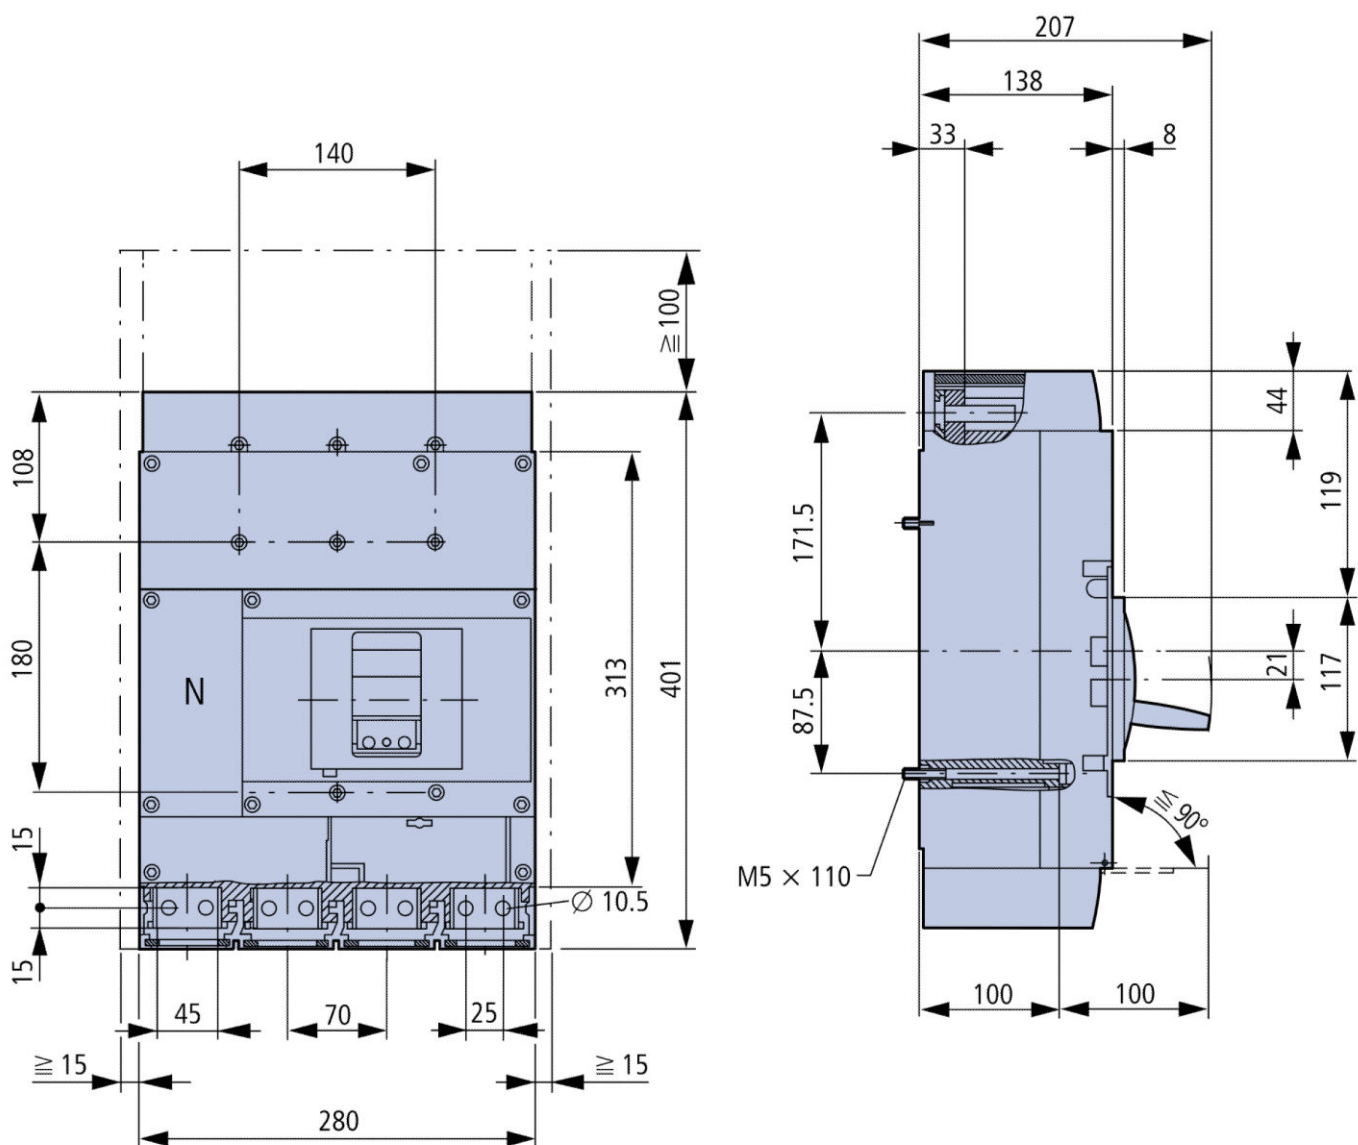

DESCRIPTION	Order No.
Switch Disconnecter, 4-pole, 1250A for remote operation	
Device category switch disconnecter for remote release, Size type 4, Rated current 1250A, Poles 4, IP Rating IP20, Tripping Unit without protection	MC412045