

Data Sheet for Article: MM216560--

White LED unit 12-30V AC/DC base mounting

Make-up LED, Version Screw terminal, Illumination Yes, Colour White , IP Rating IP20, Series MM




Technical Data

Series	MM
Version	Screw terminal
Illumination	Yes
Colour	White
Make-up	LED
IP Rating	IP20
Rated impulse withstand voltage [Uimp] (V)	6000
Rated insulation voltage [Ui] (V)	500
Overvoltage category/pollution degree	III / 3
Shock resistance	30G
Ambient temperature Open (°C)	-25°C...+70°C
Climatic proofing	Damp heat, constant, to IEC 60068-2-78 Damp heat, cyclic, to IEC 60068-2-30
Standard	IEC EN 60947 VDE 0660
Tightening torque (Nm)	0,80
Mounting position	any
Connection cross section, single wire (mm²)	0,75 - 2,5

Technical Data - continued

Connection cross-section, multi-wire (mm ²)	0,5 - 2,5
Type No.	M22-LEDC-W

Maßbild

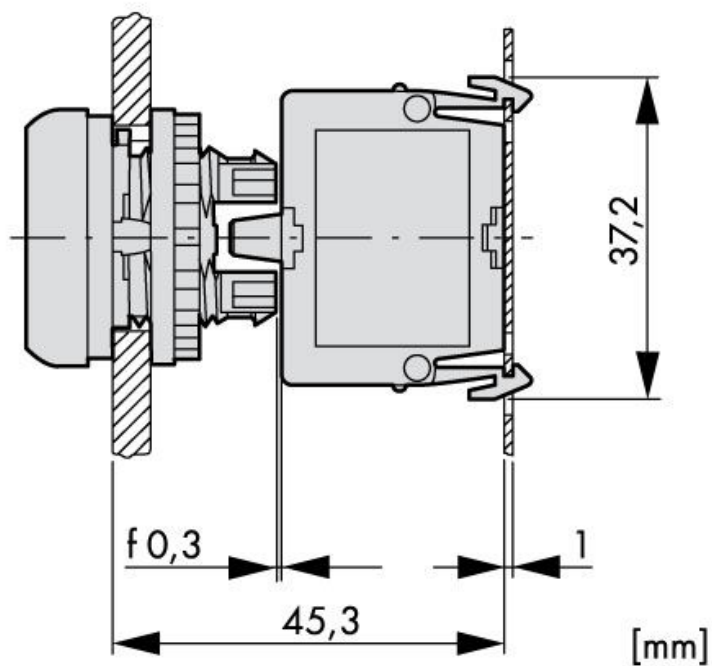

DESCRIPTION	Order No.
White LED unit 12-30V AC/DC base mounting Make-up LED, Version Screw terminal, Illumination Yes, Colour White , IP Rating IP20, Series MM	MM216560