

Data Sheet for Article: MM216708--

Double push-button, illuminated, black/ white, `STOP/START`

Make-up double pushbuttons, Version spring-return, Illumination for passive illumination,
Colour White ,Black, IP Rating IP66, Series MM




Technical Data

Series	MM
Version	spring-return
Illumination	for passive illumination
Colour	White Black
Make-up	double pushbuttons
IP Rating	IP66
Necessary Accessories	MM216374--;MM216376--;MM216378--
Optional Accessories	MM216396--
shock resistance	30G
Ambient temperature Open (°C)	-25°C...+70°C
Climatic proofing	Damp heat, constant, to IEC 60068-2-78 Damp heat, cyclic, to IEC 60068-2-30
Standard	IEC EN 60947 VDE 0660
Actuating force (N)	5

Technical Data - continued

Lifespan, mechanical	200000 Operations
Operating frequency	< 3600 Operations
Mounting position	any
Type No.	M22-DDL-WS-GB1/GB0

Maßbild

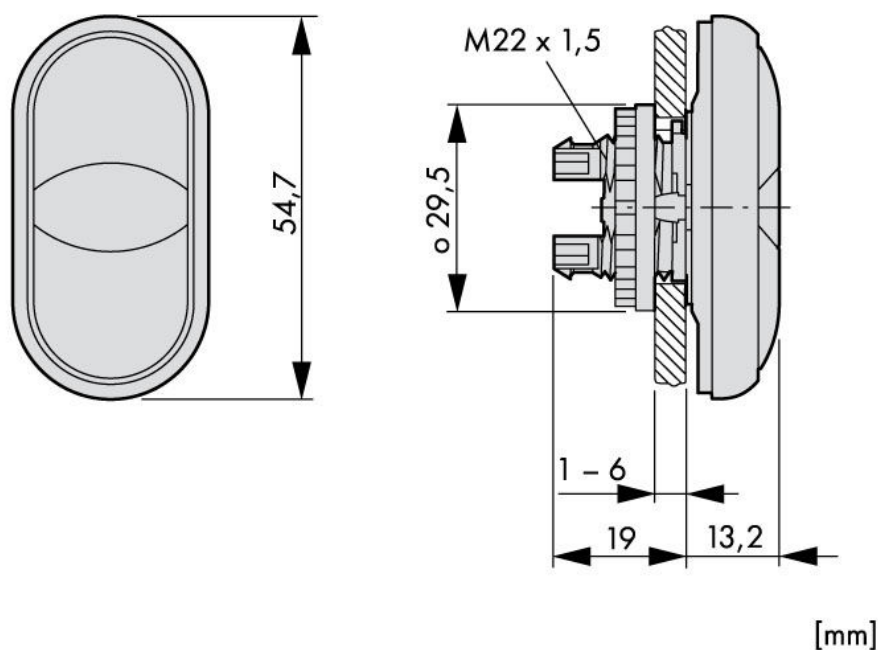

Article Table

DESCRIPTION	Order No.
Double push-button, illuminated, black/white, `STOP/START` Make-up double pushbuttons, Version spring-return, Illumination for passive illumination, Colour White ,Black, IP Rating IP66, SeriesMM216708 MM	
Necessary Accessories	
Adapter (front) Make-up Mounting adapter, Illumination No, Colour Black, Series MM	MM216374
NO contact block front mount Make-up Contacts, Version Screw terminal, Illumination No, IP Rating IP20, Series MM	MM216376
NC contact block front mount Make-up Contacts, Version Screw terminal, Illumination No, IP Rating IP20, Series MM	MM216378
Optional Accessories	
Diaphragm for double push-button Make-up Key protection membrane, Illumination No, Colour Plastic transparent, Series MM	MM216396