

Data Sheet for Article: MM216959--

Illuminated Push-button, flat, `I`, stay-put, green

Make-up illuminated pushbutton, Version flat,latching, Illumination for passive illumination, Colour Green , IP Rating IP67,IP69K, Series MM




Technical Data

Series	MM
Version	flat latching
Illumination	for passive illumination
Colour	Green
Make-up	illuminated pushbutton
IP Rating	IP69K IP67
Necessary Accessories	MM216374--;MM216376--;MM216378--
shock resistance	30G
Ambient temperature Open (°C)	-25°C...+70°C
Climatic proofing	Damp heat, constant, to IEC 60068-2-78 Damp heat, cyclic, to IEC 60068-2-30
Standard	IEC EN 60947 VDE 0660
Actuating force (N)	5

Technical Data - continued

Lifespan, mechanical	1000000 Operations
Operating frequency	< 1800 Operations
Mounting position	any
Type No.	M22-DRL-G-X1

Maßbild

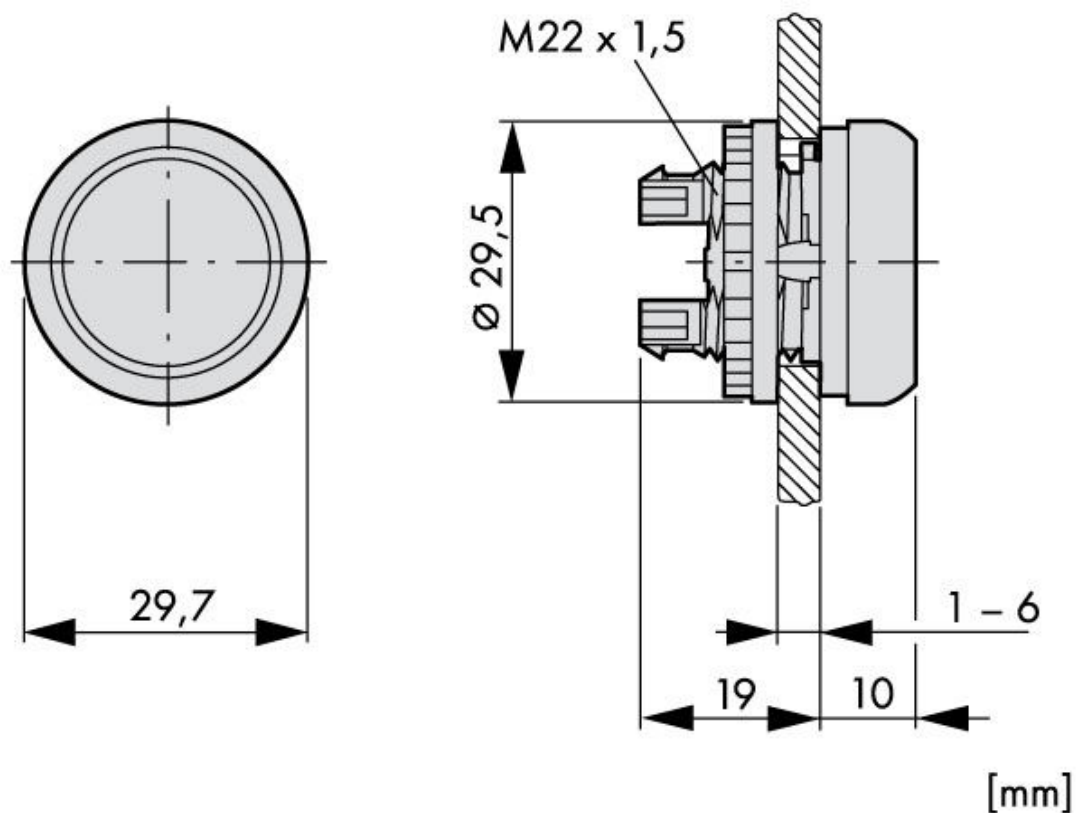

Article Table

DESCRIPTION	Order No.
Illuminated Push-button, flat, `I`, stay-put, green	
Make-up illuminated pushbutton, Version flat,latching, Illumination for passive illumination, Colour Green , IP Rating IP67,IP69K, Series MM	MM216959
Necessary Accessories	
Adapter (front)	
Make-up Mounting adapter, Illumination No, Colour Black, Series MM	MM216374
NO contact block front mount	
Make-up Contacts, Version Screw terminal, Illumination No, IP Rating IP20, Series MM	MM216376
NC contact block front mount	
Make-up Contacts, Version Screw terminal, Illumination No, IP Rating IP20, Series MM	MM216378