

Switch Disconnecter MX3, 3 pole, 800A

ATTENTION: only with AX + AL equipable



Technical Data


Net width (mm)	195,00
Net height (mm)	300,00
Net weight (kg)	13,50
EAN	9004840896879
Power loss (W)	153,60
Min. ambient temperature (°C)	-40
Max. ambient temperature (°C)	70
Device category	Switch disconnectors
Standard	EN 60947-3
Rated operational current (A)	800
Rated voltage	< 690VAC
Size type	3
Poles	3
Pollution degree	3
IP Rating	IP40
Rated insulation voltage [Ui] (V)	1250
Rated impulse withstand voltage [Uimp] (V)	12000
Mechanical durability	10000 Schaltspiele

Technical Data - continued

Electrical endurance (Operation cycle)

AC 415V, In	2000
AC 690V, In	1000

Dimensioned drawing: Switch Disconnecter MX3, 3 pole, 800A

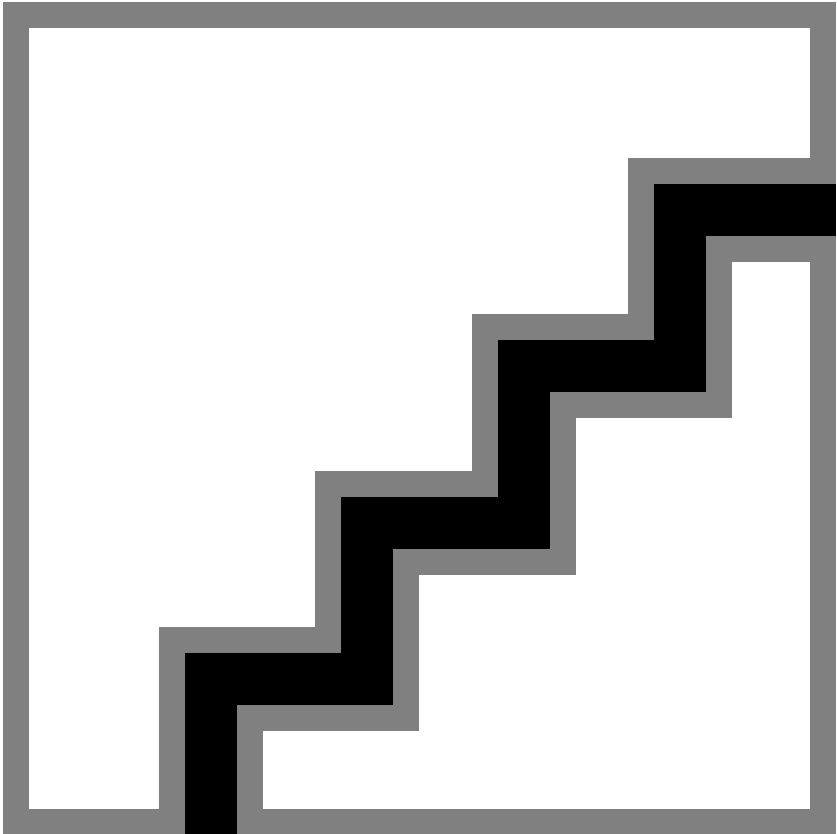

Article Table

DESCRIPTION	Order No.
Switch Disconnecter MX3, 3 pole, 800A	MX380035
ATTENTION: only with AX + AL equipable	
Optional Accessories	
Auxiliary contact 1 CO	MX199411
Alarm contact 1 CO	MX199511