

Data Sheet for Article: NCCB2463--

Low Power Supply 24V DC SECURO 24 CON cab. L 6/20 wo. batt.


6 circuits, max. 120 luminaires (20 luminaires per circuit), max. current per circuit: 3A, max. total load current in emergency mode: 1h: 18A, 3h: 18A, total max. 10A for maintained luminaires, with circuit monitoring, cabinet L (for 4 x 45Ah): H754 x W475 x D186mm, without batteries



Technical Data

Net width (mm)	475,00
Net height (mm)	754,00
Netto depth (mm)	186,00
Net weight (kg)	16,70

Dimensioned drawing: Low Power Supply 24V DC SECURO 24 CON cab. L 6/20 wo. batt.

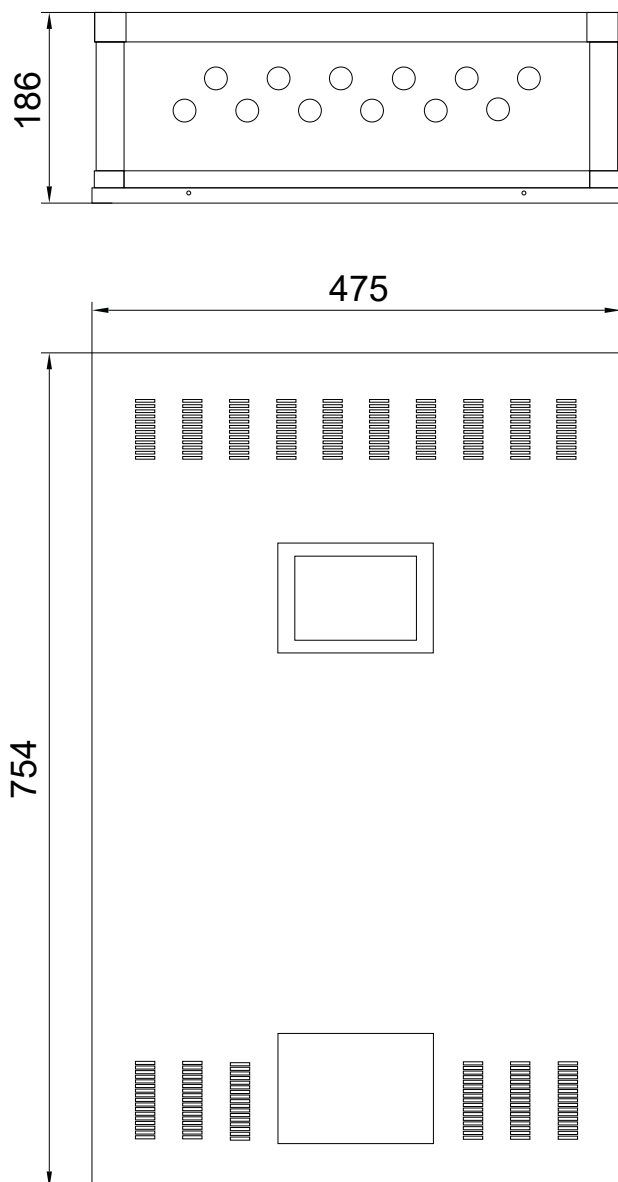

DESCRIPTION	Order No.
Low Power Supply 24V DC SECURO 24 CON cab. L 6/20 wo. batt.	
6 circuits, max. 120 luminaires (20 luminaires per circuit), max. current per circuit: 3A, max. total load current in emergency mode:	
1h: 18A, 3h: 18A, total max. 10A for maintained luminaires, with circuit monitoring, cabinet L (for 4 x 45Ah): H754 x W475 x	NCCB2463
D186mm, without batteries	

Optional Accessories

Article Table

DESCRIPTION	Order No.
Optional Accessories	
Battery RPower OGiV longlife up to 12 years 12V/47Ah (C20)	NLBA045
Rescue sign luminaire SECURO 24 CON R1 1W LED 24V DC White, universal mounting, viewing distance: 24m	NCR1MUW04
Rescue sign luminaire SECURO 24 R1 1W LED 24V DC White, universal mounting, viewing distance: 30m	NCR1XUW04
Rescue sign luminaire SECURO 24 CON R3 1W LED 24V DC White, ceiling surface mounting, viewing distance: 46m	NCR3XDW04
Rescue sign luminaire SECURO 24 CON C1 1W LED 24V DC White, wall surface mounting, including adhesive pictogram set, viewing distance: 17m, optional ceiling surface mounting with hanging sign (NCC1H - vd: 30m)	NCC1SUW04
Rescue sign luminaire SECURO 24 CON C2 1W LED 24V DC White, wall surface mounting, optional ceiling surface mounting with hanging sign (NCC2H), including adhesive pictogram set, distance: 30m	NCC2XWW04
Security luminaire SECURO 24 CON S2 3W ERT-LED 24V DC White, ceiling surface mounting, incl. exchangeable lenses for illuminating escape routes or round areas, 314lm	NCS2LDW14
Security luminaire SECURO 24 CON S3 4W ERT-LED 24V DC White, ceiling recessed mounting, incl. exchangeable lenses for illuminating escape routes or round areas, 377lm	NCS3LEW14
Security luminaire SECURO 24 CON C1 6W HP-LED 24V DC White, ceiling surface mounting, 590lm	NCC1CDW24
Security luminaire SECURO 24 CON C2 6W HP-LED 24V DC White, ceiling surface mounting, 600lm	NCC2CDW24