

Security luminaire SECURO 24 PRO S4 3W LED 24V DC

White, IP65, -25° up to +50°C, LED 3W, wall surface mounting, with single lamp supervision
- centrally switchable, 318lm




Technical Data

Net width (mm)	192,00
Net height (mm)	220,00
Netto depth (mm)	65,00
Net weight (kg)	1,12
Luminaire type	safety luminaire
Self contained - central battery	Central power supply luminaire
Function	SECURO 24 PRO
Version	metal luminaire
Design	S4
Colour	White
Illuminant	HP-LED (3W)
Lumen	314
Rated current LED (mA)	180

Technical Data - continued

Voltage range (V)	24V DC
IP Rating	IP65
Mounting	surface mounting ceiling recessed mounting ceiling optional
Min. ambient temperature (°C)	-25
Max. ambient temperature (°C)	50
AA Class E 8101	AA4
Manufacturer	Schrack

Dimensioned drawing: Security luminaire SECURO 24 PRO S4 3W LED 24V DC

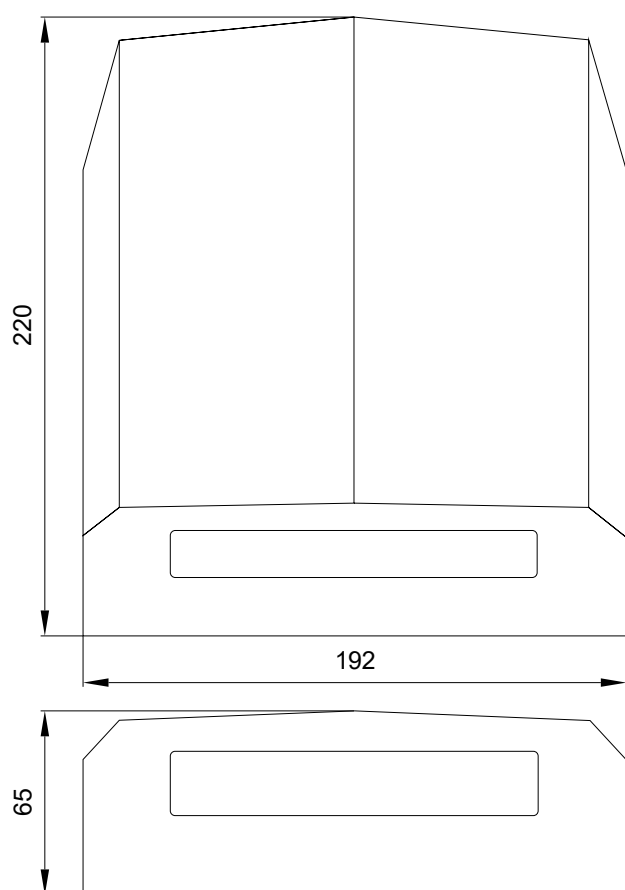

Article Table

DESCRIPTION	Order No.
Security luminaire SECURO 24 PRO S4 3W LED 24V DC White, IP65, -25° up to +50°C, LED 3W, wall surface mounting, with single lamp supervision - centrally switchable, 318lm	NCS4FWW14C
Optional Accessories	
Low Power Supply 24V DC SECURO 24 PRO cab. M 6/20 w. batt. 6 circuits, max. 120 luminaires (20 luminaires per circuit), max. current per circuit: 3A, max. total load current in emergency mode: 1h: 18A, 3h: 8A, total max. 10A for maintained luminaires, with single luminaire monitoring, cabinet M (for 2 x 45Ah): H534 x W475 x D186mm, incl. 2 pcs 45Ah OGiV batteries (NLBA045)	NCCB2461ES
Low Power Supply 24V DC SECURO 24 PRO cab. L 6/20 w. batt. 6 circuits, max. 120 luminaires (20 luminaires per circuit), max. current per circuit: 3A, max. total load current in emergency mode: 1h: 18A, 3h: 18A, total max. 10A for maintained luminaires, with single luminaire monitoring, cabinet L (for 4 x 45Ah): H754 x W475 x D186mm, incl. 4 pcs 45Ah OGiV batteries (NLBA045)	NCCB2463ES