

Explosion proof emerg.luminaire EXIT zone 1/21 LED 230V AC/DC

arrow down, for CPS and LPS, wall surface mounting, IP66, viewing distance: 25m, 106lm




Technical Data

Net length (mm)	356,00
Net height (mm)	175,00
Netto depth (mm)	76,00
Net weight (kg)	2,00
Luminaire type	emergency sign luminaire
Self contained - central battery	Central power supply luminaire
Function	standard
Version	explosion proof luminaire
Design	EXIT
Colour	Grey
Pictogram	Pictogram in accordance with ISO 7010 already affixed at the factory
Viewing distance (m)	25
Illuminant	LED (3W)
Lumen	106
Voltage range (V)	110-277V AC; 110-250V DC
IP Rating	IP66
Mounting	surface mounting wall
Min. ambient temperature (°C)	-20
Max. ambient temperature (°C)	40
AA Class E 8101	AA4
Manufacturer	Cooper Crouse-Hinds

Dimensions (mm)

NL9...

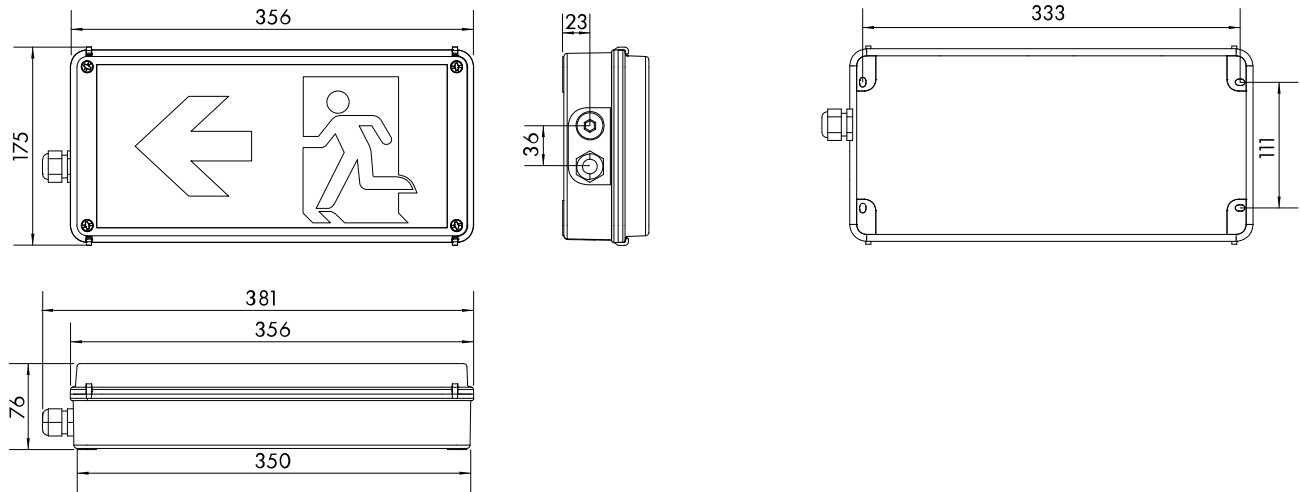

Article Table

DESCRIPTION	Order No.
Explosion proof emerg.luminaire EXIT zone1/21 LED 230V AC/DC arrow down, for CPS and LPS, wall surface mounting, IP66, viewing distance: 25m, 106lm	NL91000023
Optional Accessories	
Light manager for CPS including mixed mode 4-200VA	NLMU05
Box IP65 with mounting plate + MU05 f. luminaires 4-200VA 176x125x82 mm (LxHxD)	NLMU05BOX