

Data Sheet for Article: NL93000004

EX-protected emerg.luminaire EXIT 2 zone2/22 LED 230V AC/DC

transparent cover without pictogram, for CPS and LPS, wall surface mounting, IP66, 106lm




Technical Data

Net length (mm)	356,00
Net height (mm)	175,00
Netto depth (mm)	76,00
Net weight (kg)	2,00
Luminaire type	safety luminaire
Self contained - central battery	Central power supply luminaire
Function	standard
Version	explosion proof luminaire
Design	EXIT
Colour	Grey
Illuminant	LED (3W)
Lumen	106
Voltage range (V)	110-277V AC; 110-250V DC
IP Rating	IP66
Mounting	surface mounting wall
Min. ambient temperature (°C)	-20
Max. ambient temperature (°C)	40
AA Class E 8101	AA4
Manufacturer	Cooper Crouse-Hinds

Dimensions (mm)

NL9...

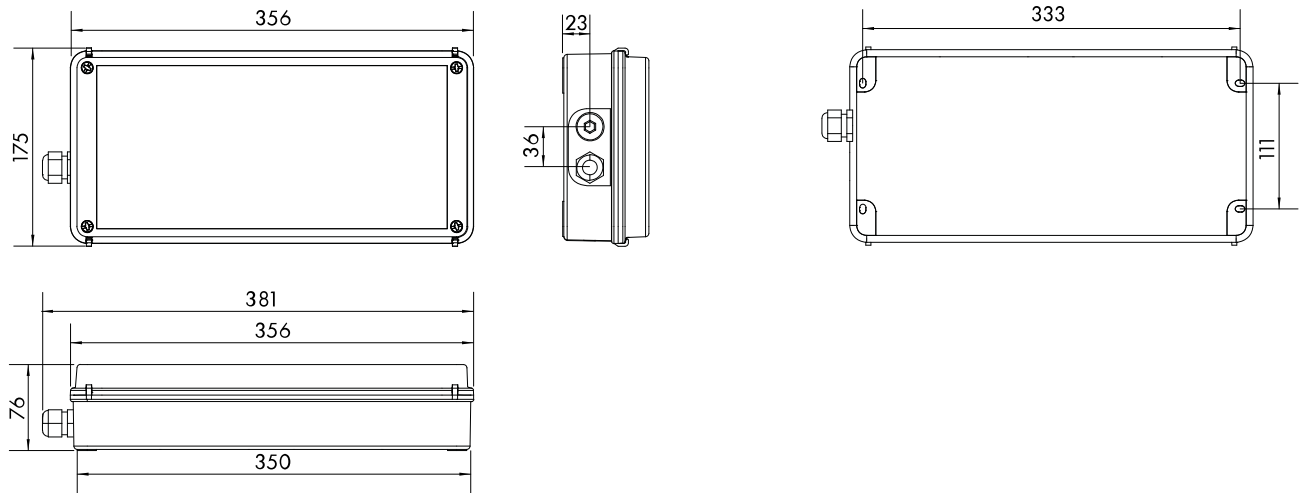

Distance table - min. illumination at the middle line: 1lx - maintenance factor 0,80

Montagehöhe [m]					
2,00	2,38	6,37	6,19	5,98	2,38
2,50	2,41	6,9	6,67	6,51	2,41
3,00	2,26	6,98	6,92	6,86	2,43
3,50	2,19	6,89	6,87	7,04	2,27
4,00	2,13	6,48	6,75	7,03	2,04

Article Table

DESCRIPTION	Order No.
EX-protected emerg.luminaire EXIT 2 zone2/22 LED 230V AC/DC transparent cover without pictogram, for CPS and LPS, wall surface mounting, IP66, 106lm	NL93000004
Optional Accessories	
Light manager for CPS including mixed mode 4-200VA	NLMU05
Box IP65 with mounting plate + MU05 f. luminaires 4-200VA 176x125x82 mm (LxHxD)	NLMU05BOX