

Data Sheet for Article: NL93000023

EX-protected emerg.luminaire EXIT 2 zone2/22 LED 230V AC/DC

arrow down, for CPS and LPS, wall surface mounting, IP66, viewing distance: 25m, 106lm




Technical Data

Net length (mm)	356,00
Net height (mm)	175,00
Netto depth (mm)	76,00
Net weight (kg)	2,00
Luminaire type	emergency sign luminaire
Self contained - central battery	Central power supply luminaire
Function	standard
Version	explosion proof luminaire
Design	EXIT
Colour	Grey
Viewing distance (m)	25
Illuminant	LED (3W)
Lumen	106
Voltage range (V)	110-277V AC; 110-250V DC
IP Rating	IP66
Mounting	surface mounting wall
Min. ambient temperature (°C)	-20
Max. ambient temperature (°C)	40
AA Class E 8101	AA4
Manufacturer	Cooper Crouse-Hinds

Dimensions (mm)

NL9...

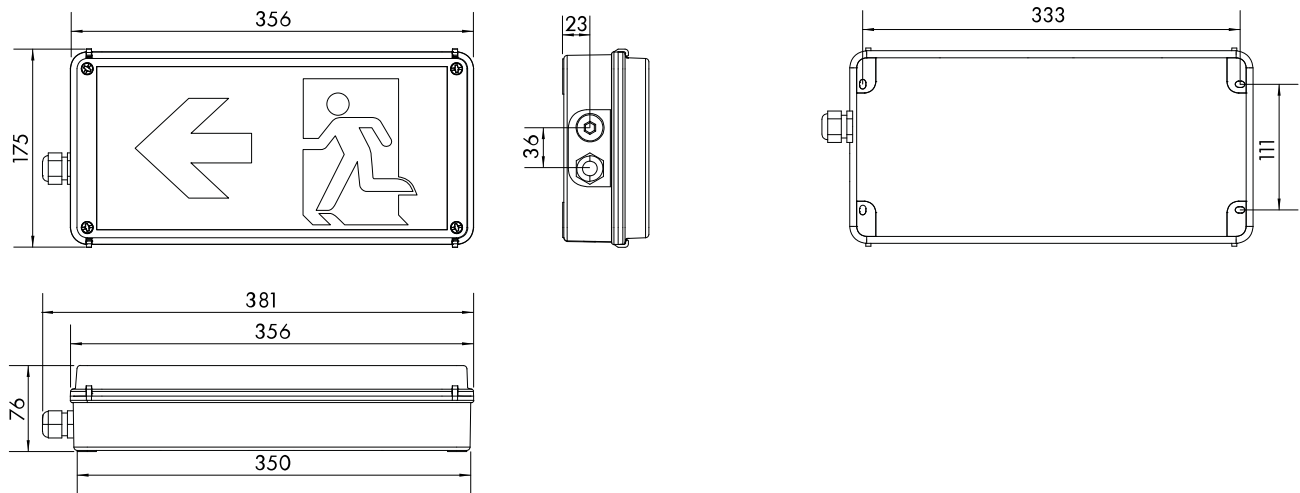

Article Table

DESCRIPTION	Order No.
EX-protected emerg.luminaire EXIT 2 zone2/22 LED 230V AC/DC arrow down, for CPS and LPS, wall surface mounting, IP66, viewing distance: 25m, 106lm	NL93000023
Optional Accessories	
Light manager for CPS including mixed mode 4-200VA	NLMU05
Box IP65 with mounting plate + MU05 f. luminaires 4-200VA 176x125x82 mm (LxHxD)	NLMU05BOX