

Data Sheet for Article: NL93030004

EX-protected emerg.luminaire EXIT 2 N zone2/22 LED3h 230V AC

transparent cover without pictogram, wall surface mounting, IP66, 106lm




Technical Data

Net length (mm)	356,00
Net height (mm)	175,00
Netto depth (mm)	76,00
Net weight (kg)	2,50
Luminaire type	safety luminaire
Self contained - central battery	Self contained luminaire
Function	self controlled
Version	explosion proof luminaire
Design	EXIT
Colour	Grey
Backup time (h)	3
Illuminant	LED (3W)
Lumen	106
Voltage range (V)	110-277V AC; 110-250V DC
Battery (V/Ah)	2x6/0,8 NiCd
IP Rating	IP66
Mounting	surface mounting wall
Min. ambient temperature (°C)	5
Max. ambient temperature (°C)	35
Manufacturer	Cooper Crouse-Hinds

Dimensions (mm)

NL9...

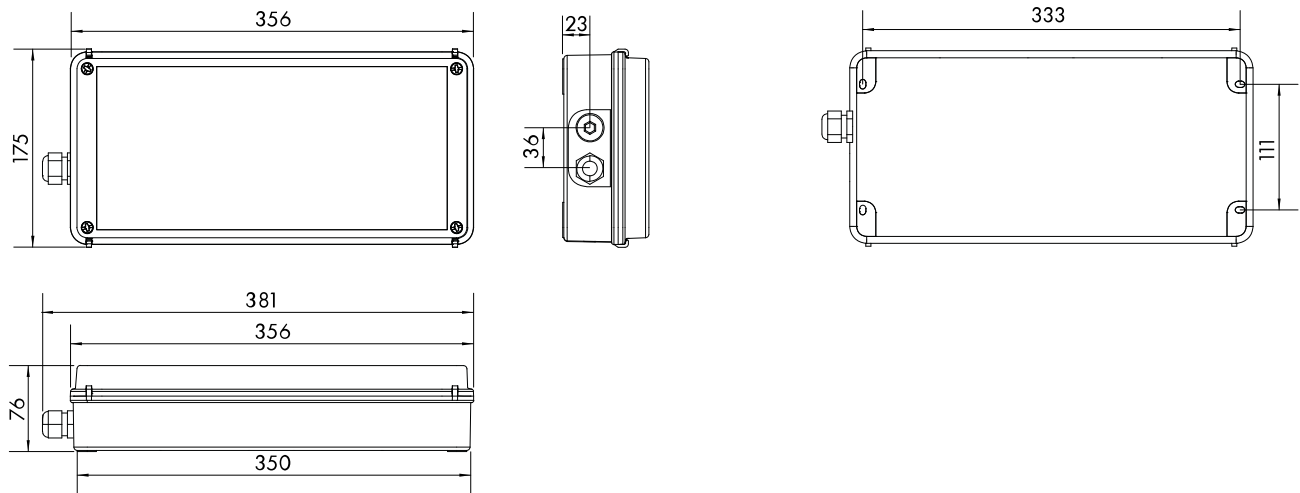

Distance table - min. illumination at the middle line: 1lx - maintenance factor 0,80

Montagehöhe [m]					
2,00	2,38	6,37	6,19	5,98	2,38
2,50	2,41	6,9	6,67	6,51	2,41
3,00	2,26	6,98	6,92	6,86	2,43
3,50	2,19	6,89	6,87	7,04	2,27
4,00	2,13	6,48	6,75	7,03	2,04

DESCRIPTION	Order No.
EX-protected emerg.luminaire EXIT 2 N zone2/22 LED3h 230V AC transparent cover without pictogram, wall surface mounting, IP66, 106lm	NL93030004