

Data Sheet for Article: NL93030023

# EX-protected emerg.luminaire EXIT 2 N zone2/22 LED 3h230V AC

arrow down, wall surface mounting, IP66, viewing distance: 25m, 106lm




## Technical Data

|                                  |                           |
|----------------------------------|---------------------------|
| Net length (mm)                  | 356,00                    |
| Net height (mm)                  | 175,00                    |
| Netto depth (mm)                 | 76,00                     |
| Net weight (kg)                  | 2,50                      |
| Luminaire type                   | emergency sign luminaire  |
| Self contained - central battery | Self contained luminaire  |
| Function                         | self controlled           |
| Version                          | explosion proof luminaire |
| Design                           | EXIT                      |
| Colour                           | Grey                      |
| Viewing distance (m)             | 25                        |
| Backup time (h)                  | 3                         |
| Illuminant                       | LED (3W)                  |
| Lumen                            | 106                       |
| Voltage range (V)                | 110-277V AC; 110-250V DC  |
| Battery (V/Ah)                   | 2x6/0,8 NiCd              |
| IP Rating                        | IP66                      |
| Mounting                         | surface mounting wall     |
| Min. ambient temperature (°C)    | 5                         |
| Max. ambient temperature (°C)    | 35                        |
| Manufacturer                     | Cooper Crouse-Hinds       |

## Dimensions (mm)

NL9...

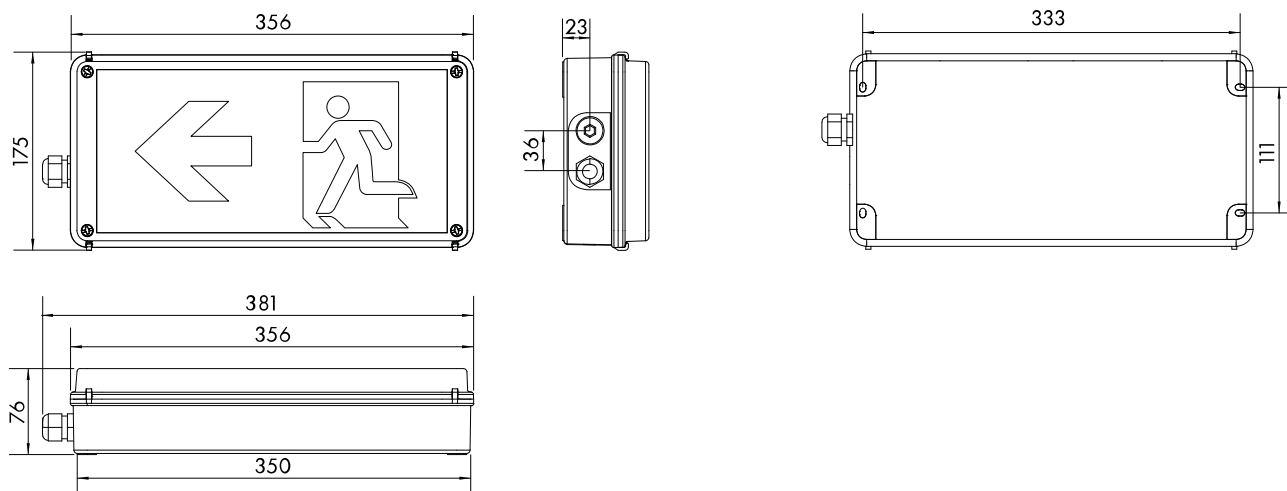

| DESCRIPTION                                                                                                                           | Order No.  |
|---------------------------------------------------------------------------------------------------------------------------------------|------------|
| EX-protected emerg.luminaire EXIT 2 N zone2/22 LED 3h230V AC<br>arrow down, wall surface mounting, IP66, viewing distance: 25m, 106lm | NL93030023 |