

Data Sheet for Article: NLAMDCA03W

# Emerg. luminaire AM WirelessControl 3h 230VAC rope surface

Anthracite, LiFeP04 battery, viewing distance: 22m, Cord suspension: standard length 1500mm (shortenable), radio switchable




## Technical Data

|                                  |                                                                                                                                 |
|----------------------------------|---------------------------------------------------------------------------------------------------------------------------------|
| Net length (mm)                  | 241,00                                                                                                                          |
| Net width (mm)                   | 80,00                                                                                                                           |
| Net height (mm)                  | 193,00                                                                                                                          |
| Net weight (kg)                  | 1,15                                                                                                                            |
| Luminaire type                   | emergency sign luminaire                                                                                                        |
| Self contained - central battery | Self contained luminaire                                                                                                        |
| Function                         | WirelessControl Professional                                                                                                    |
| Version                          | edge luminaire                                                                                                                  |
| Design                           | AM                                                                                                                              |
| Colour                           | RAL 7016 (anthracite)                                                                                                           |
| Pictogram                        | Slide-in pictogram set (arrow left, right, bottom, top and white foil for single side use) included in accordance with ISO 7010 |
| Viewing distance (m)             | 22                                                                                                                              |

## Technical Data - continued

|                               |                                    |
|-------------------------------|------------------------------------|
| Backup time (h)               | 3                                  |
| Illuminant                    | LED (2W)                           |
| Voltage range (V)             | 230V AC 50Hz $\pm 20\%$            |
| Power maintained mode (W)     | 3,50                               |
| Power non-maintained mode (W) | 0,80                               |
| Power max. (W)                | 4,70                               |
| Battery (V/Ah)                | 2x3,2/1,2 LiFePO4                  |
| IP Rating                     | IP40                               |
| Impact Resistance             | $\geq IK03$                        |
| Mounting                      | surface ceiling mounting with cord |
| Min. ambient temperature (°C) | -5                                 |
| Max. ambient temperature (°C) | 40                                 |
| AA Class E 8101               | AA4                                |
| Manufacturer                  | Schrack                            |

## Dimensions (mm)

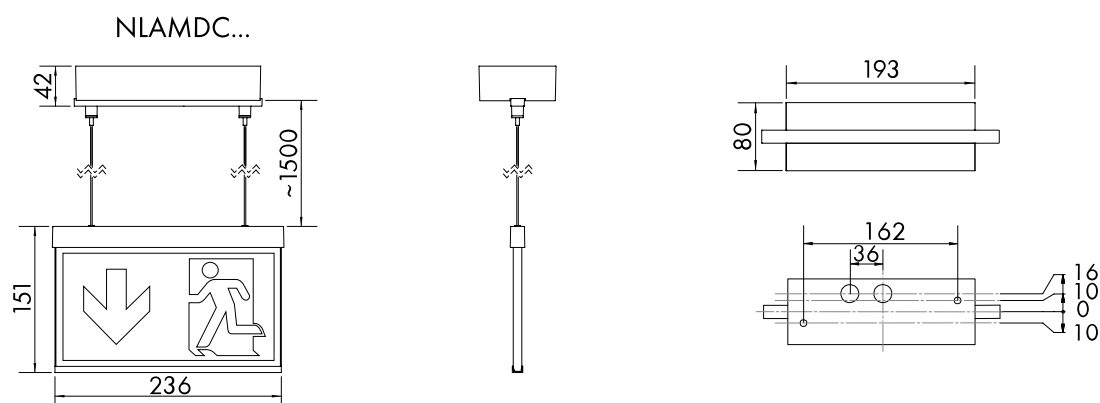

## Article Table

| DESCRIPTION                                                                                                                                                                                                                          | Order No.  |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|
| Emerg. luminaire AM WirelessControl 3h 230VAC rope surface<br>Anthracite, LiFePO4 battery, viewing distance: 22m, Cord suspension: standard length 1500mm (shortenable), radio switchable                                            | NLAMDCA03W |
| <b>Optional Accessories</b>                                                                                                                                                                                                          |            |
| Plug-pictogram left top for Design AM, KBM, KS, VM<br>viewing distance: 22m                                                                                                                                                          | NLAMPIKTLO |
| Plug-pictogram left bottom for Design AM, KBM, KS, VM<br>viewing distance: 22m                                                                                                                                                       | NLAMPIKTLU |
| Plug-pictogram right top for Design AM, KBM, KS, VM<br>viewing distance: 22m                                                                                                                                                         | NLAMPIKTRO |
| Plug-pictogram right bottom for Design AM, KBM, KS, VM<br>viewing distance: 22m                                                                                                                                                      | NLAMPIKTRU |
| Pictograph set "fire protection" VD: 22 m.. (2x4 pcs.)<br>pictographs according to ISO 7010 included: fire extinguisher, fire hose reel, fire alarm call point, collection of firefighting equipment, suitable for design KS, AM, KB | NLKS4FIRE  |
| Set 2 accus LiFePO4 3,2V 1,2Ah f. WirelessControl lum. w.LEO<br>LiFePO4 - Lithium-iron phoshpate battery , UN3480 - UN 3480 : Lithium-Ion batteries                                                                                  | NLAKKU321L |
|                                                                                                                                                                                                                                      | NLTESTSC2  |
| Protective cover for test buttons NLTEST2---                                                                                                                                                                                         | NLTEST2COV |