

Data Sheet for Article: NLAMDCE03W

Emerg. luminaire AM WirelessControl 3h 230VAC rope surface

Stainless steel look, LiFeP04 battery, viewing distance: 22m, Cord suspension: standard length 1500mm (shortenable), radio switchable




Technical Data

Net length (mm)	241,00
Net width (mm)	80,00
Net height (mm)	193,00
Net weight (kg)	1,15
Luminaire type	emergency sign luminaire
Self contained - central battery	Self contained luminaire
Function	WirelessControl Professional
Version	edge luminaire
Design	AM
Colour	stainless steel appearance
Pictogram	Slide-in pictogram set (arrow left, right, bottom, top and white foil for single side use) included in accordance with ISO 7010
Viewing distance (m)	22

Technical Data - continued

Backup time (h)	3
Illuminant	LED (2W)
Voltage range (V)	230V AC 50Hz $\pm 20\%$
Power maintained mode (W)	3,50
Power non-maintained mode (W)	0,80
Power max. (W)	4,70
Battery (V/Ah)	2x3,2/1,2 LiFePO4
IP Rating	IP40
Impact Resistance	$\geq IK03$
Mounting	surface ceiling mounting with cord
Min. ambient temperature (°C)	-5
Max. ambient temperature (°C)	40
AA Class E 8101	AA4
Manufacturer	Schrack

Dimensions (mm)

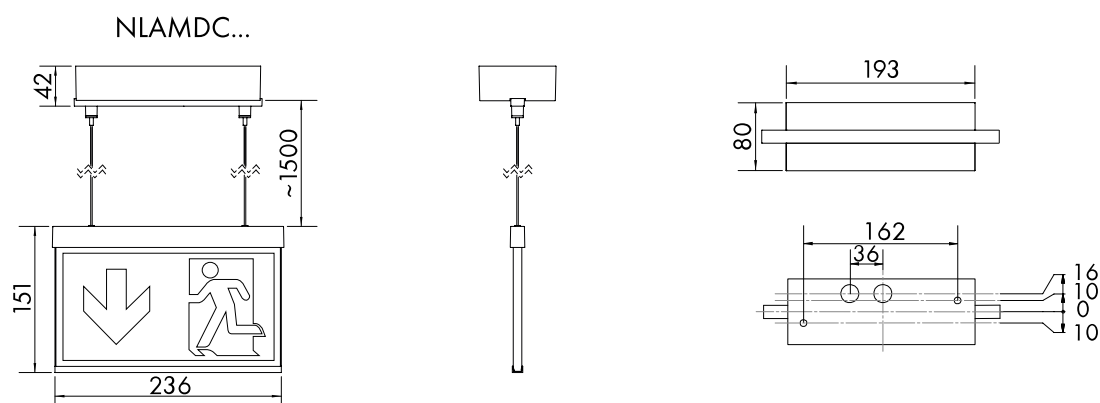

Article Table

DESCRIPTION	Order No.
Emerg. luminaire AM WirelessControl 3h 230VAC rope surface	
Stainless steel look, LiFePO4 battery, viewing distance: 22m, Cord suspension: standard length 1500mm (shortenable), radio switchable	NLAMDCE03W
Optional Accessories	
Plug-pictogram left top for Design AM, KBM, KS, VM viewing distance: 22m	NLAMPIKTLO
Plug-pictogram left bottom for Design AM, KBM, KS, VM viewing distance: 22m	NLAMPIKTLU
Plug-pictogram right top for Design AM, KBM, KS, VM viewing distance: 22m	NLAMPIKTRO
Plug-pictogram right bottom for Design AM, KBM, KS, VM viewing distance: 22m	NLAMPIKTRU
Pictograph set "fire protection" VD: 22 m.. (2x4 pcs.) pictographs according to ISO 7010 included: fire extinguisher, fire hose reel, fire alarm call point, collection of firefighting equipment, suitable for design KS, AM, KB	NLKS4FIRE
Set 2 accus LiFePO4 3,2V 1,2Ah f. WirelessControl lum. w.LEO LiFePO4 - Lithium-iron phosphpate battery , UN3480 - UN 3480 : Lithium-Ion batteries	NLAKKU321L
	NLTESTSC2
Protective cover for test buttons NLTEST2---	NLTEST2COV