

Data Sheet for Article: NLAMRA403W

Emerg. luminaire AM WirelessControl 3h 230VAC wall recessed

anthracite, LiFePO4 battery, viewing distance: 22m, radio switchable




Technical Data

Net length (mm)	241,00
Net width (mm)	79,00
Net height (mm)	151,00
Net weight (kg)	1,15
Luminaire type	emergency sign luminaire
Self contained - central battery	Self contained luminaire
Function	WirelessControl Professional
Version	edge luminaire
Design	AM
Colour	RAL 7016 (anthracite)
Pictogram	Slide-in pictogram set (arrow left, right, bottom, top and white foil for single side use) included in accordance with ISO 7010
Viewing distance (m)	22
Backup time (h)	3

Technical Data - continued

Illuminant	LED (2W)
Voltage range (V)	230V AC 50Hz ±20%
Power maintained mode (W)	3,50
Power non-maintained mode (W)	0,80
Power max. (W)	4,70
Battery (V/Ah)	2x3,2/1,2 LiFePO4
IP Rating	IP40
Impact Resistance	≥ IK03
Mounting	recessed wall mounting
Min. ambient temperature (°C)	-5
Max. ambient temperature (°C)	40
AA Class E 8101	AA4
Manufacturer	Schrack

Dimensions (mm)

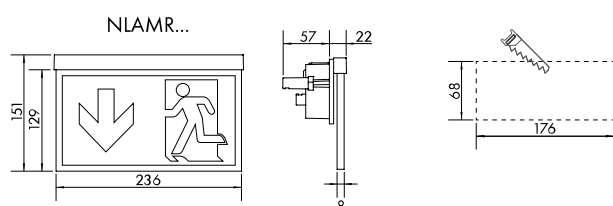

Article Table

DESCRIPTION	Order No.
Emerg. luminaire AM WirelessControl 3h 230VAC wall recessed anthracite, LiFePO4 battery, viewing distance: 22m, radio switchable	NLAMRA403W
Optional Accessories	
Plug-pictogram left top for Design AM, KBM, KS, VM viewing distance: 22m	NLAMPIKTLO
Plug-pictogram left bottom for Design AM, KBM, KS, VM viewing distance: 22m	NLAMPIKTLU
Plug-pictogram right top for Design AM, KBM, KS, VM viewing distance: 22m	NLAMPIKTRO
Plug-pictogram right bottom for Design AM, KBM, KS, VM viewing distance: 22m	NLAMPIKTRU

Article Table

DESCRIPTION	Order No.
Optional Accessories	
Pictograph set "fire protection" VD: 22 m.. (2x4 pcs.) pictographs according to ISO 7010 included: fire extinguisher, fire hose reel, fire alarm call point, collection of firefighting equipment, suitable for design KS, AM, KB	NLKS4FIRE
Concrete plaster box for emergency luminaire Design AM/AX	NLAMAXBE
Set 2 accus LiFePO4 3,2V 1,2Ah f. WirelessControl lum. w.LEO LiFePO4 - Lithium-iron phosphat battery , UN3480 - UN 3480 : Lithium-Ion batteries	NLAKKU321L
	NLTESTSC2
Protective cover for test buttons NLTEST2---	NLTEST2COV