

# Emergency luminaire AM stainless steel look, wall recessed

with supervision - centrally switchable, Viewing distance: 22m, LED, 230V AC/DC




## Technical Data

|                                  |                                                                                                                                 |
|----------------------------------|---------------------------------------------------------------------------------------------------------------------------------|
| Net length (mm)                  | 241,00                                                                                                                          |
| Net width (mm)                   | 79,00                                                                                                                           |
| Net height (mm)                  | 151,00                                                                                                                          |
| Net weight (kg)                  | 1,15                                                                                                                            |
| Luminaire type                   | emergency sign luminaire                                                                                                        |
| Self contained - central battery | Central power supply luminaire                                                                                                  |
| Function                         | with monitoring - centrally switchable                                                                                          |
| Version                          | edge luminaire                                                                                                                  |
| Design                           | AM                                                                                                                              |
| Colour                           | stainless steel appearance                                                                                                      |
| Pictogram                        | Slide-in pictogram set (arrow left, right, bottom, top and white foil for single side use) included in accordance with ISO 7010 |
| Viewing distance (m)             | 22                                                                                                                              |
| Illuminant                       | LED (2W)                                                                                                                        |
| Voltage range (V)                | 230V AC 50Hz $\pm 20\%$ ; 230V DC $\pm 20\%$                                                                                    |
| Power maintained mode (W)        | 3,50                                                                                                                            |
| Power non-maintained mode (W)    | 1,10                                                                                                                            |
| Power max. (W)                   | 3,50                                                                                                                            |
| IP Rating                        | IP40                                                                                                                            |
| Impact Resistance                | $\geq$ IK03                                                                                                                     |
| Mounting                         | recessed wall mounting                                                                                                          |
| Min. ambient temperature (°C)    | -5                                                                                                                              |

## Technical Data - continued

|                               |         |
|-------------------------------|---------|
| Max. ambient temperature (°C) | 40      |
| AA Class E 8101               | AA4     |
| Manufacturer                  | Schrack |

## Dimensions (mm)

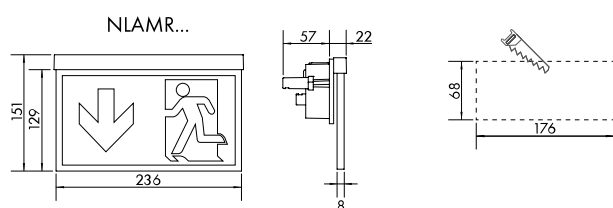

## Article Table

| DESCRIPTION                                                                                                                                                                                                                             | Order No.  |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|
| Emergency luminaire AM stainless steel look, wall recessed<br>with supervision - centrally switchable, Viewing distance: 22m, LED, 230V AC/DC                                                                                           | NLAMRE09EL |
| <b>Optional Accessories</b>                                                                                                                                                                                                             |            |
| Plug-pictogram left top for Design AM, KBM, KS, VM<br>viewing distance: 22m                                                                                                                                                             | NLAMPIKTLO |
| Plug-pictogram left bottom for Design AM, KBM, KS, VM<br>viewing distance: 22m                                                                                                                                                          | NLAMPIKTLU |
| Plug-pictogram right top for Design AM, KBM, KS, VM<br>viewing distance: 22m                                                                                                                                                            | NLAMPIKTRO |
| Plug-pictogram right bottom for Design AM, KBM, KS, VM<br>viewing distance: 22m                                                                                                                                                         | NLAMPIKTRU |
| Pictograph set "fire protection" VD: 22 m.. (2x4 pcs.)<br>pictographs according to ISO 7010 included: fire extinguisher, fire hose reel, fire alarm call point, collection of firefighting<br>equipment, suitable for design KS, AM, KB | NLKS4FIRE  |
| Pictograph set "first aid" vd: 22m (2x4 pcs.)<br>pictographs according to ISO 7010 included: first aid, Hazard duty point, Automated heart defibrillator, emergency window with<br>escape ladder, suitable for design KS, AM, KB        | NLKS4HELP  |
| Concrete plaster box for emergency luminaire Design AM/AX                                                                                                                                                                               | NLAMAXBE   |