

Data Sheet for Article: NLAXDA09EL

Emergency luminaire AX anthracite, LED, ceiling surface

Centrally switchable, with single lamp supervision, Viewing distance: 30m, 230V AC/DC




Technical Data

Net length (mm)	317,00
Net width (mm)	80,00
Net height (mm)	228,00
Net weight (kg)	1,40
Luminaire type	emergency sign luminaire
Self contained - central battery	Central power supply luminaire
Function	with monitoring - centrally switchable
Version	edge luminaire
Design	AX
Colour	RAL 7016 (anthracite)
Pictogram	Slide-in pictogram set (arrow left, right, bottom, top and white foil for single side use) included in accordance with ISO 7010
Viewing distance (m)	30
Illuminant	LED (3W)
Voltage range (V)	230V AC 50Hz $\pm 20\%$; 230V DC $\pm 20\%$
Power maintained mode (W)	4,50
Power non-maintained mode (W)	1,10
Power max. (W)	4,50
IP Rating	IP40
Impact Resistance	$\geq$ IK03
Mounting	surface mounting ceiling
Min. ambient temperature (°C)	-5

Technical Data - continued

Max. ambient temperature (°C)	40
AA Class E 8101	AA4
Manufacturer	Schrack

Dimensions (mm)

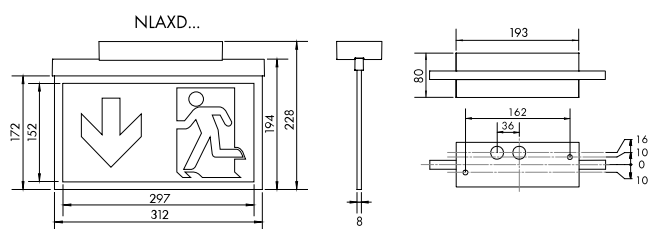

Article Table

DESCRIPTION	Order No.
Emergency luminaire AX anthracite, LED, ceiling surface Centrally switchable, with single lamp supervision, Viewing distance: 30m, 230V AC/DC	NLAXDA09EL
Optional Accessories	
Surface adapter for emergency luminaire Design AM/AX anthracite, for lateral cable entry	NLAMAXAPAA