

Emergency luminaire AX white, LED, wall surface

Centrally switchable, with single lamp supervision, Viewing distance: 30m, 230V AC/DC




Technical Data

Net length (mm)	317,00
Net width (mm)	50,00
Net height (mm)	194,00
Net weight (kg)	1,40
Luminaire type	emergency sign luminaire
Self contained - central battery	Central power supply luminaire
Function	with monitoring - centrally switchable
Version	edge luminaire
Design	AX
Colour	RAL 9003 (white)
Pictogram	Slide-in pictogram set (arrow left, right, bottom, top and white foil for single side use) included in accordance with ISO 7010
Viewing distance (m)	30
Illuminant	LED (3W)
Voltage range (V)	230V AC 50Hz $\pm 20\%$; 230V DC $\pm 20\%$
Power maintained mode (W)	4,50
Power non-maintained mode (W)	1,10
Power max. (W)	4,50
IP Rating	IP40
Impact Resistance	$\geq$ IK03
Mounting	surface mounting wall
Min. ambient temperature (°C)	-5

Technical Data - continued

Max. ambient temperature (°C)	40
AA Class E 8101	AA4
Manufacturer	Schrack

Dimensions (mm)

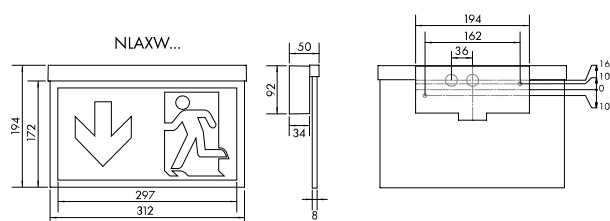

Article Table

DESCRIPTION	Order No.
Emergency luminaire AX white, LED, wall surface Centrally switchable, with single lamp supervision, Viewing distance: 30m, 230V AC/DC	NLAXWW09EL
Optional Accessories	
Surface adapter for emergency luminaire Design AM/AX white, for lateral cable entry	NLAMAXAPAW