

Data Sheet for Article: NLDER029EL

Emergency luminaire DER 3x1W ERT-LED 230V recessed mounting


with supervision - centrally switchable



Technical Data

Luminaire type	safety luminaire
Self contained - central battery	Central power supply luminaire
Function	with monitoring - centrally switchable
Version	metal luminaire
Design	DER
Colour	White
Illuminant	ERT-LED (3W)
Lumen	300
Voltage range (V)	230V AC 50Hz ±20%; 230V DC ±20%
IP Rating	IP40
Mounting	recessed mounting ceiling
Min. ambient temperature (°C)	-5
Max. ambient temperature (°C)	40
AA Class E 8101	AA4
Manufacturer	Schrack

Dimensions (mm)

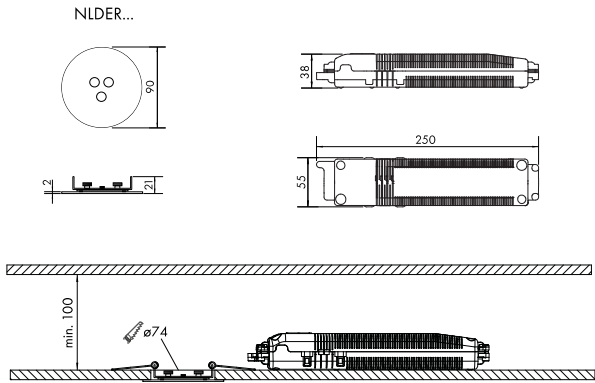

Distance table - min. illumination at the middle line: 1lx - maintenance factor 0,80

Montagehöhe [m]					
2	3,93	10,98	11,17	10,99	3,76
2,5	3,57	11,21	11,21	11,10	3,44
3	2,61	11,10	11,01	10,93	2,52
3,5	1,56	10,11	10,06	9,89	1,00
4	0,00	7,83	8,35	8,24	0,00

Article Table

DESCRIPTION	Order No.
Emergency luminaire DER 3x1W ERT-LED 230V recessed mounting with supervision - centrally switchable	NLDER029EL
Optional Accessories	
Ball Protection basket for IL, KT, DAQ, DAR, S2	NLBALL3