

Data Sheet for Article: NLDHE023SC

Emerg.lum.DHE 3x1W ERT-LED 3h 230V AC

Self C.recessed m

1h/3h/8h adjustable








Technical Data

Net length (mm)	270,00
Net width (mm)	83,00
Net height (mm)	110,00
Luminaire type	safety luminaire
Self contained - central battery	Self contained luminaire
Function	self controlled
Version	metal luminaire
Design	DL
Colour	White
Backup time (h)	3
Illuminant	ERT-LED (3W)
Lumen	1h: 300;3h: 300;8h: 150
Voltage range (V)	230V AC 50Hz $\pm$ 20%
Battery (V/Ah)	9,6/2,0 NiMh
IP Rating	IP20
Mounting	recessed mounting ceiling
AA Class E 8101	AA4
Manufacturer	Schrack

Dimensions (mm)

NLDL...

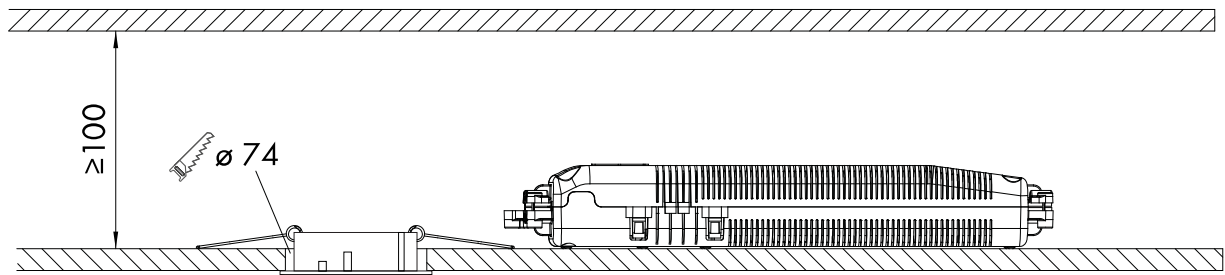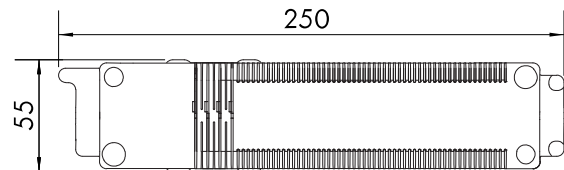

Distance table - min. illumination at the middle line: 1lx - maintenance factor 0,80 - 1h, 3h autonomy time

Montagehöhe [m]					
2,00	3,93	10,98	11,17	10,99	3,76
2,50	3,57	11,21	11,21	11,10	3,44
3,00	2,61	11,10	11,01	10,93	2,52
3,50	1,56	10,11	10,06	9,89	1,00
4,00	0,00	7,83	8,35	8,24	0,00

Distance table - min. illumination at the middle line: 1lx - maintenance factor 0,80 - 8h autonomy time

Montagehöhe [m]					
2,00	2,00	7,91	7,85	7,79	1,93
2,50	1,06	7,07	7,05	6,94	0,62
3,00	0,00	5,14	5,41	5,13	0,00
3,50	0,00	2,41	2,83	2,79	0,00
4,00	0,00	0,00	0,00	0,00	0,00

Article Table

DESCRIPTION	Order No.
Emerg.lum.DHE 3x1 W ERT-LED 3h 230V AC Self C.recessed m 1h/3h/8h adjustable	NLDHE023SC
Optional Accessories	
Accu NiMH 9,6V 2,0 Ah for self contained luminaires ERT-LED Suitable for LPU module	NLAKKU9620
Ball Protection gascet for IL, KI, VI, RI, KT, DAQ, DAR	NLBALL3