

Data Sheet for Article: NLDLQ023WL

Emerg.lum. DLQ ERT-LED 3h 230VAC Wireless recess. switchable

Recessed mounting








Technical Data

Net length (mm)	83,00
Net width (mm)	83,00
Net height (mm)	18,00
Net weight (kg)	0,80
Luminaire type	safety luminaire
Self contained - central battery	Self contained luminaire
Function	WirelessControl Professional
Version	metal luminaire
Design	DL
Colour	Silver
Backup time (h)	3
Illuminant	ERT-LED (1W)
Lumen	100
Voltage range (V)	230V AC 50Hz ±20%
Battery (V/Ah)	4,8/2,0 NiMh
IP Rating	IP20
Mounting	recessed mounting ceiling
AA Class E 8101	AA4

Dimensions (mm)

NLDL...

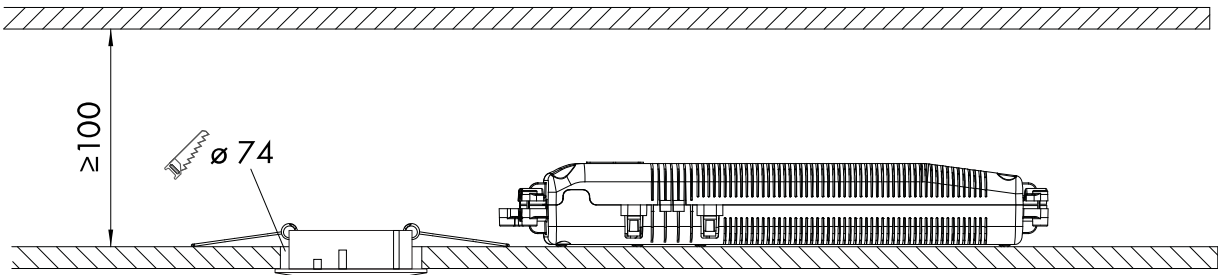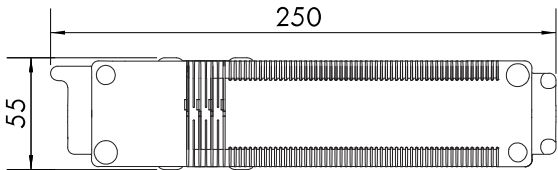

Distance table - min. illumination at the middle line: 1lx - maintenance factor 0,80 -3h autonomy time

Montagehöhe [m]					
2,00	2,00	4,76	6,71	8,61	3,61
2,50	2,10	5,42	7,63	9,87	4,00
3,00	2,10	5,89	8,27	10,96	3,84
3,50	0,74	5,81	8,07	10,37	0,87
4,00	0,00	4,31	7,49	7,84	0,00

Article Table

DESCRIPTION	Order No.
Emerg.lum. DLQ ERT-LED 3h 230VAC Wireless recess. switchable Recessed mounting	NLDLQ023WL
Optional Accessories	
Accu NiMH 4,8V 2,0Ah for self contained luminaires LED LPU or LEM module	NLAKKU4820
Ball Protection gascet for IL, KI, VI, RI, KT, DAQ, DAR	NLBALL3