

Emerg. luminaire EE 1x1W ERT-LED 3h 230V AC Wireless radial


White, with round cover, ceiling recessed mounting with metal springs and external electronic box, security luminaire to illuminate areas with a luminaire distance of 10m at a mounting high of 2,5m, with wireless central switching function



Technical Data

Net height (mm)	23,00
Net diameter (mm)	88,00
Net weight (kg)	0,35
Luminaire type	safety luminaire
Self contained - central battery	Self contained luminaire
Function	WirelessControl Professional
Version	metal luminaire
Design	EE
Colour	White
Backup time (h)	3
Illuminant	ERT-LED (1W)
Lumen	140
Voltage range (V)	230V AC 50Hz ±20%
Battery (V/Ah)	4,8/2,0 NiMh
IP Rating	IP20
Mounting	recessed mounting ceiling
Min. ambient temperature (°C)	-5
Max. ambient temperature (°C)	40
AA Class E 8101	AA4

Dimensions (mm)

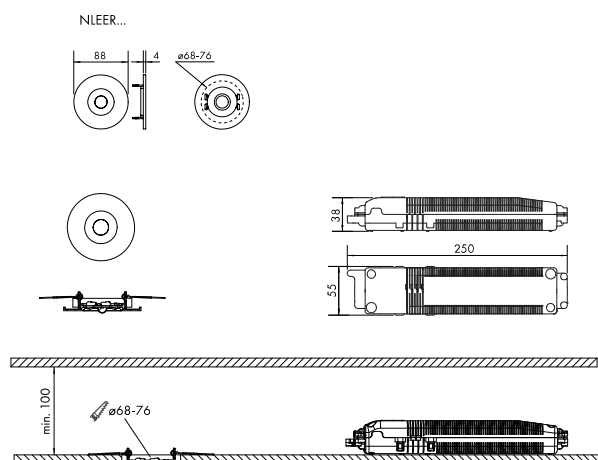

Distance table - min. illumination at the middle line: 1lx - maintenance factor 0,80 -3h autonomy time

Montagehöhe [m]					
2,00	3,76	9,62	9,63	9,64	3,76
2,50	1,06	9,67	9,74	10,04	1,11
3,00	0,00	8,00	8,00	8,07	0,00

Article Table

DESCRIPTION	Order No.
Emerg. luminaire EE 1x1W ERT-LED 3h 230V AC Wireless radial White, with round cover, ceiling recessed mounting with metal springs and external electronic box, security luminaire to illuminate areas with a luminaire distance of 10m at a mounting high of 2,5m, with wireless central switching function	NLEERR023W
Optional Accessories	
Cover for emergency luminaires Design EE white, square Incl. 2 metal springs	NLEEQWS
Cover for emergency luminaires Design EE anthracite, square Incl. 2 metal springs	NLEEQAZ
Cover for emergency luminaires Design EE anthracite, round Incl. 2 metal springs	NLEERAZ
Accu NiMH 4,8V 2,0Ah for self contained luminaires LED LPU or LEM module	NLAKKU4820