

Emerg.lum. EE 1x1W ERT-LED 3h 230V AC Self C. spot illum.


White, with round cover, ceiling recessed mounting with metal springs and external electronic box, security luminaire to illuminate areas with high halls (>4m) with a luminaire distance of 9,5m at a mounting high of 9m, 1h/3h adjustable



Technical Data

Net height (mm)	23,00
Net diameter (mm)	88,00
Net weight (kg)	0,35
Luminaire type	safety luminaire
Self contained - central battery	Self contained luminaire
Function	self controlled
Version	metal luminaire
Design	EE
Colour	White
Backup time (h)	3
Illuminant	ERT-LED (1W)
Lumen	140
Voltage range (V)	230V AC 50Hz ±20%
Battery (V/Ah)	4,8/2,0 NiMh
IP Rating	IP20
Mounting	recessed mounting ceiling
Min. ambient temperature (°C)	-5
Max. ambient temperature (°C)	40
AA Class E 8101	AA4

Dimensions (mm)

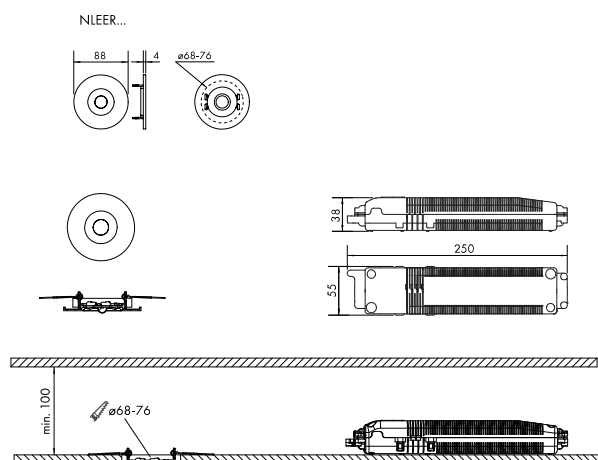

Distance table - min. illumination at the middle line: 1lx - maintenance factor 0,80 - 1h-3h autonomy time

Montagehöhe [m]					
2,00	2,00	4,76	4,79	4,84	2,00
2,50	2,25	5,37	5,43	5,48	2,33
3,00	2,43	5,89	5,94	5,99	2,52
3,50	2,64	6,44	6,52	6,59	2,73
4,00	2,80	6,88	6,99	7,09	2,91
5,00	3,00	7,74	7,86	7,96	3,12
6,00	3,20	8,38	8,50	8,64	3,32
7,00	3,12	8,80	8,98	9,14	3,26
8,00	2,92	9,02	9,22	9,42	3,08
9,00	2,40	9,03	9,27	9,48	2,58
10,00	1,96	8,84	9,08	9,32	2,12

Article Table

DESCRIPTION	Order No.
Emerg.lum. EE 1x1W ERT-LED 3h 230V AC Self C. spot illum. White, with round cover, ceiling recessed mounting with metal springs and external electronic box, security luminaire to illuminate areas with high halls (>4m) with a luminaire distance of 9,5m at a mounting high of 9m, 1h/3h adjustable	NLEERS023S
Optional Accessories	
Cover for emergency luminaires Design EE white, square Incl. 2 metal springs	NLEEQWS
Cover for emergency luminaires Design EE anthracite, square Incl. 2 metal springs	NLEEQAZ
Cover for emergency luminaires Design EE anthracite, round Incl. 2 metal springs	NLEERAZ
Accu NiMH 4,8V 2,0Ah for self contained luminaires LED LPU or LEM module	NLAKKU4820