


Luminaire for Cent.Batt.Sys. FM Flexway Monitoring LED 230V

Wall mounting, switching of the selectable pictograms via potential free contact; viewing distance: 20m

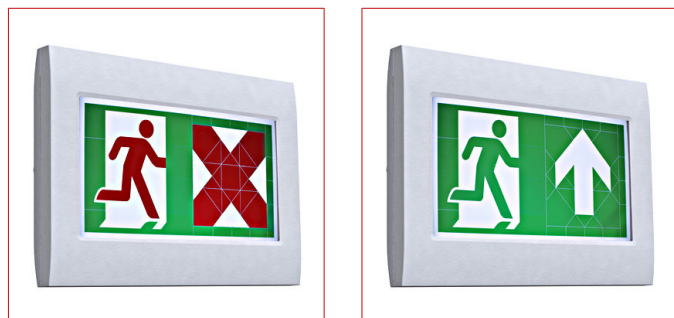


Technical Data

Net length (mm)	262,00
Net height (mm)	188,00
Netto depth (mm)	58,00
Net weight (kg)	2,00
Luminaire type	emergency sign luminaire
Self contained - central battery	Central power supply luminaire
Function	for dynamic escape route management
Version	metal luminaire
Design	FM
Colour	RAL 9003 (white)
Pictogram	Slide-in pictogram set (arrow left, right, bottom, top) included in accordance with ISO 7010
Viewing distance (m)	20
Illuminant	LED (2W)
Voltage range (V)	230V AC 50Hz $\pm 20\%$; 230V DC $\pm 20\%$
Power maintained mode (W)	5,40
Power non-maintained mode (W)	2,80
Power max. (W)	5,40
IP Rating	IP65
Impact Resistance	IK01
Mounting	surface mounting wall

Technical Data - continued


Min. ambient temperature (°C)	-5
Max. ambient temperature (°C)	40
AA Class E 8101	AA4
Manufacturer	Schrack

Dimensions (mm)

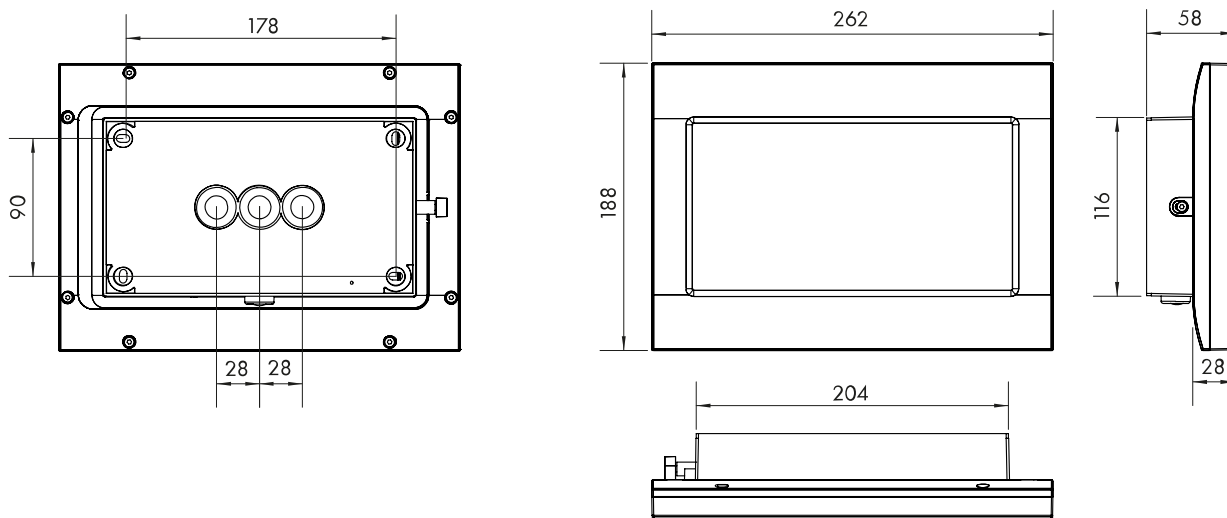


Dimensions accessoires (mm)

NLFMDA

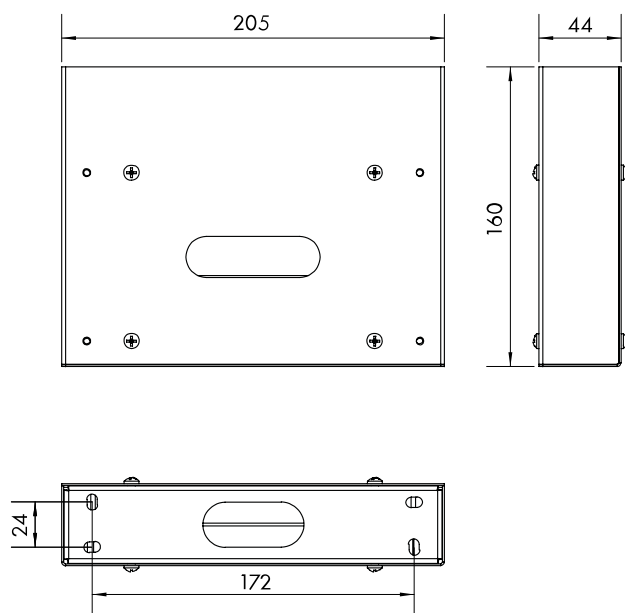

NLFMWA

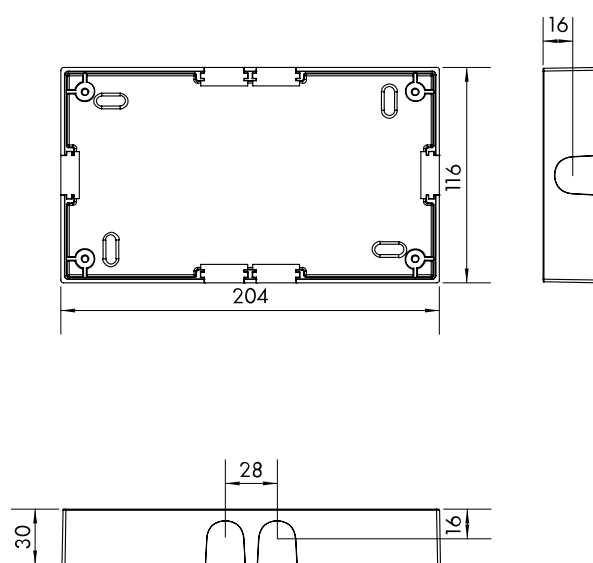

Article Table

DESCRIPTION	Order No.
Luminaire for Cent.Batt.Sys. FM Flexway Monitoring LED 230V Wall mounting, switching of the selectable pictograms via potential free contact; viewing distance: 20m	NLFMWD009M
Optional Accessories	
Surface mounting adapter for luminaires Design FM	NLFMWA001