


Emergency luminaire FM white LED 230V, wall surface

Wall surface mounting, with supervision - centrally switchable, rescue sign luminaire, HACCP certified for food industry; viewing distance: 22m

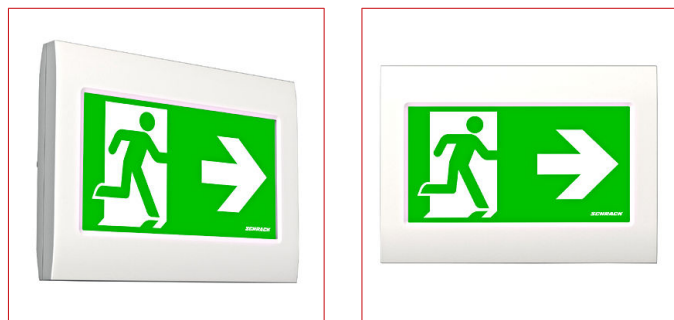


Technical Data

Net length (mm)	262,00
Net height (mm)	188,00
Netto depth (mm)	58,00
Net weight (kg)	2,00
Luminaire type	emergency sign luminaire
Self contained - central battery	Central power supply luminaire
Function	with monitoring - centrally switchable
Version	metal luminaire
Design	FM
Colour	RAL 9003 (white)
Pictogram	Slide-in pictogram set (arrow left, right, bottom, top) included in accordance with ISO 7010
Viewing distance (m)	22
Illuminant	LED (2W)
Voltage range (V)	230V AC 50Hz $\pm 20\%$; 230V DC $\pm 20\%$
Power maintained mode (W)	3,40
Power non-maintained mode (W)	1,10
Power max. (W)	3,40
IP Rating	IP65
Impact Resistance	IK01
Mounting	surface mounting wall

Technical Data - continued


Min. ambient temperature (°C)	-5
Max. ambient temperature (°C)	40
AA Class E 8101	AA4
Manufacturer	Schrack

Dimensions (mm)

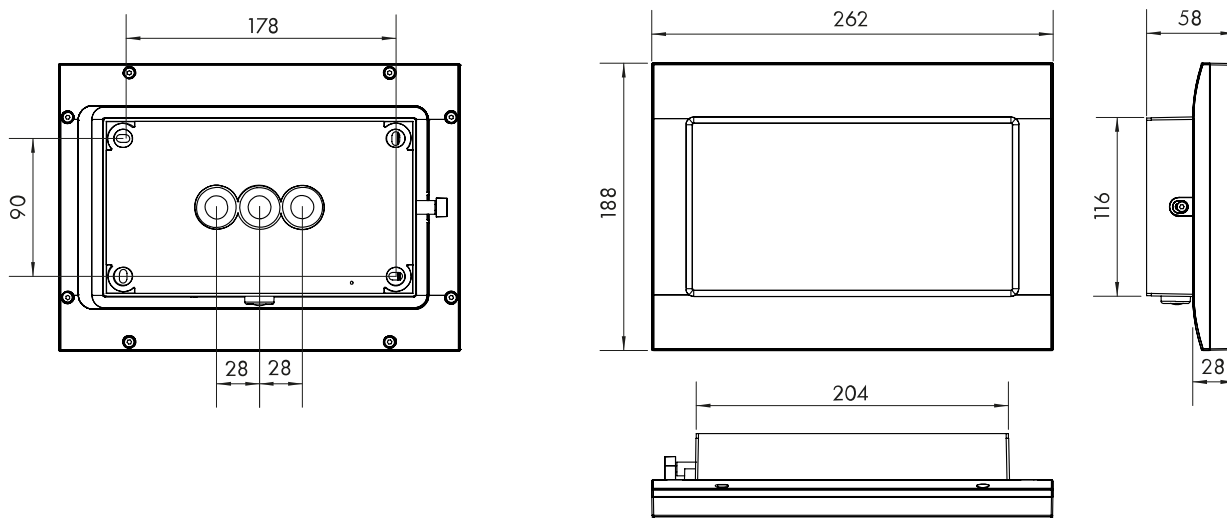


Dimensions accessoires (mm)

NLFMDA

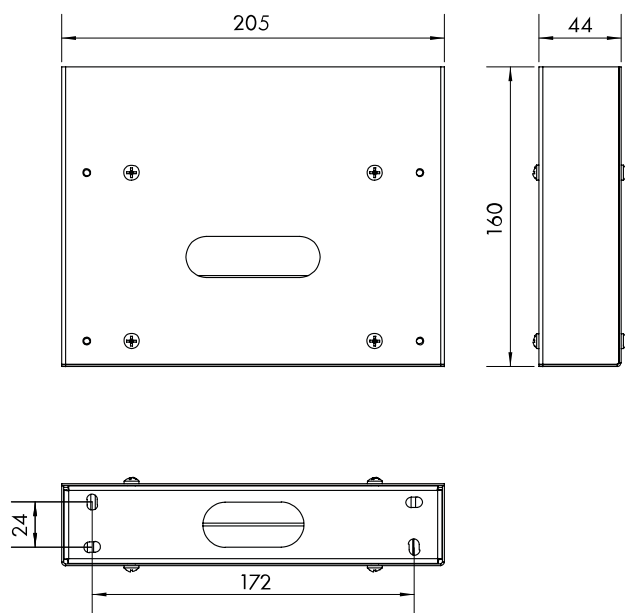

NLFMWA

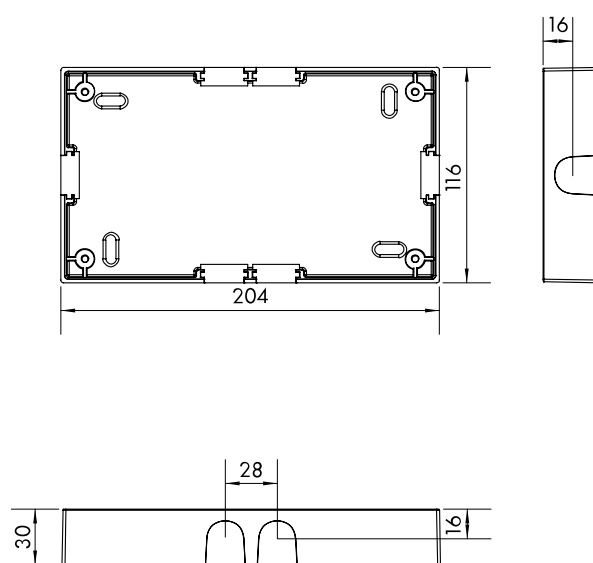

Article Table

DESCRIPTION	Order No.
Emergency luminaire FM white LED 230V, wall surface	
Wall surface mounting, with supervision - centrally switchable, rescue sign luminaire, HACCP certified for food industry; viewing distance: 22m	NLFMWW09EL
Optional Accessories	
Surface mounting adapter for luminaires Design FM	NLFMWA001