

Emergency luminaire IL 1x3W ERT-LED 230V hallway surface


White, surface ceiling mounting, Safety luminaire for lightning areas with luminaire distance 27m at a room height of 6m, with supervision - centrally switchable




Technical Data

Net height (mm)	36,00
Net diameter (mm)	99,00
Net weight (kg)	0,35
Luminaire type	safety luminaire
Self contained - central battery	Central power supply luminaire
Function	with monitoring - centrally switchable
Version	Plastic luminaire
Design	IL
Halogen-free	Housing made of halogen-free plastic
Colour	White
Illuminant	ERT-LED (3W)
Lumen	360
Voltage range (V)	230V AC 50Hz $\pm 20\%$; 230V DC $\pm 20\%$
IP Rating	IP40
Mounting	surface mounting ceiling
Min. ambient temperature (°C)	-20
Max. ambient temperature (°C)	40
AA Class E 8101	AA4
Manufacturer	Schrack


Dimensions NLILD... (mm)

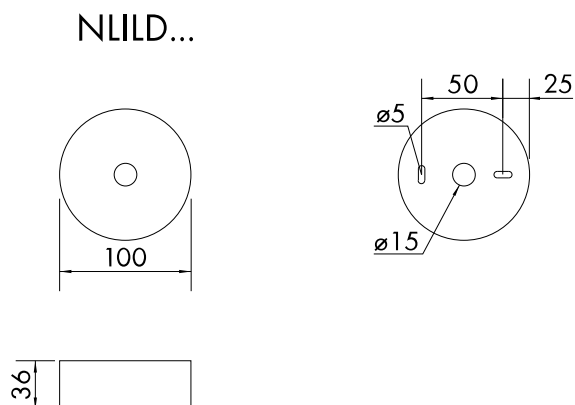

Dimensions accessoires NLILIP65 (mm)

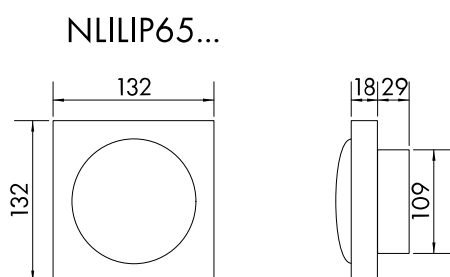

Dimensions accessoires Zinc die-dast housing NLEA.. (mm)

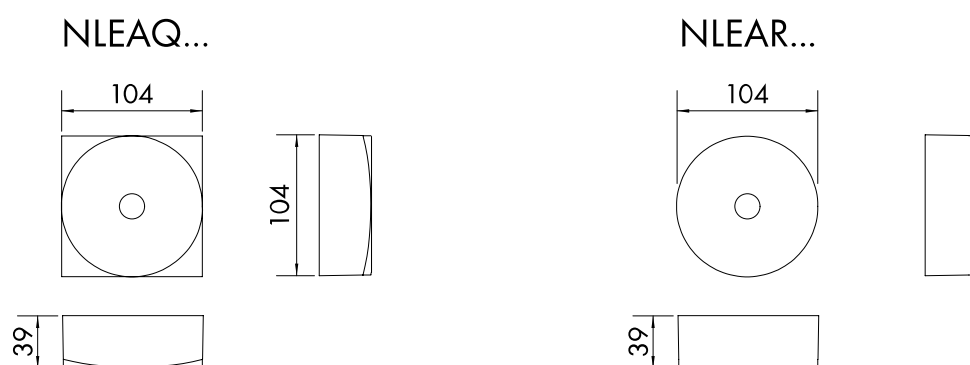

Dimensions recessed frame NLILDE (mm)



Distance table - min. illumination at the middle line: 1lx - maintenance factor 0,80

Montagehöhe [m]					
2,00	2,30	6,19	12,64	19,15	8,02
2,50	2,41	6,52	14,11	21,89	9,33
3,00	2,43	6,80	15,42	24,37	9,81
3,50	2,45	7,00	16,34	26,62	10,16
4,00	2,31	7,09	16,66	28,11	9,42
6,00	1,28	6,40	13,14	27,10	5,04

Article Table

DESCRIPTION	Order No.
Emergency luminaire IL 1x3W ERT-LED 230V hallway surface	
White, surface ceiling mounting, Safety luminaire for lightning areas with luminaire distance 27m at a room height of 6m, with supervision - centrally switchable	NLILDF029E
Optional Accessories	
Square plug over housing B1 for emergency luminaires NLILD..	NLILB1
Square plug over housing B2 for emergency luminaires NLILD..	NLILB2
Plug over housing white round zinc die cast	NLEAR
Universal ceiling mounting cover for the luminaires NLILDR.. NLILDF.. or NLILDS	
Plug over housing anthracite round zinc die cast	NLEARAZ
Universal ceiling mounting cover for the luminaires NLILDR.. NLILDF.. or NLILDS	
Plug over housing white square zinc die cast	NLEAQ
Universal ceiling mounting cover for the luminaires NLILDR.. NLILDF.. or NLILDS	

Article Table

DESCRIPTION	Order No.
Optional Accessories	
Plug over housing anthracite square zinc die cast	NLEAQAZ
Universal ceiling mounting cover for the luminaires NLILDR.. NLILDF.. or NLILDS	NLEAQAZ
Spacer plate white for NLILD.. for cable entry at the side	NLILDAPA2
Ball Protection basket for IL, KT, DAQ, DAR, S2	NLBALL3
I x h x d: 200 x 200 x 90mm	NLBALL3
Surface mounted housing white IP65 for emerg. Lumin. NLILD Polycarbonate, with side cable entries	NLILIP65K
IP65 housing for IL ceiling mounted luminaires, white, IK10	NLILIP65K
Suitable for surface-mounted emergency ceiling lights NLILD..., including spacer plate, vandal-proof with shock resistance test according to IK10, ball impact resistant according to DIN 18032	NLILIK10W