

Data Sheet for Article: NLK2U003SC

Self-contained luminaire K2 self-control LED

3h-8h 230V AC

Universal mounting, viewing distance: 27m



Technical Data


Net length (mm)	280,00
Net width (mm)	45,00
Net height (mm)	194,00
Net weight (kg)	0,80
Luminaire type	emergency sign luminaire
Self contained - central battery	Self contained luminaire
Function	self controlled
Version	Plastic luminaire
Design	K2
Halogen-free	Housing made of halogen-free plastic
Colour	White
Pictogram	Slide-in pictogram set (arrow left, right, bottom, top and white foil for single side use) included in accordance with ISO 7010
Viewing distance (m)	27
Backup time (h)	8
Illuminant	LED (3W)
Voltage range (V)	230V AC 50Hz $\pm 20\%$
Battery (V/Ah)	4,8/0,8 NiMh
IP Rating	IP44
Impact Resistance	IK03

Technical Data - continued


Mounting	surface mounting ceiling surface mounting wall universal
Min. ambient temperature (°C)	-5
Max. ambient temperature (°C)	40
AA Class E 8101	AA4
Manufacturer	Schrack

Dimensions (mm)


NLK2U

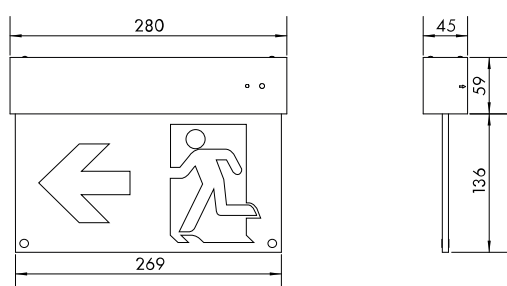


NLK2U + NLK2E

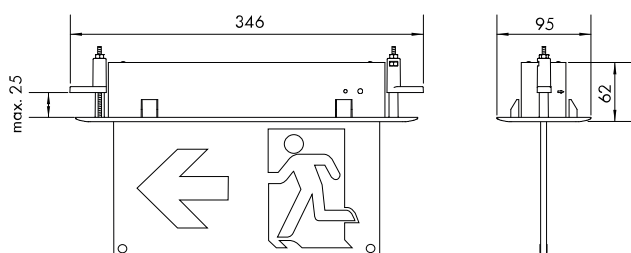

NLK2U + NLK1AW

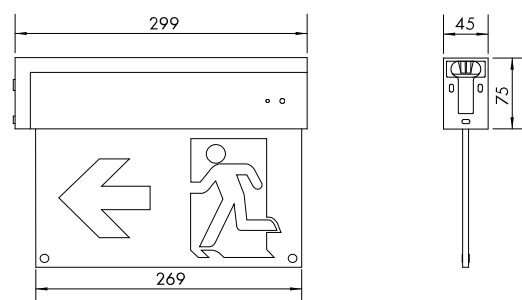

Drilling distances (mm)

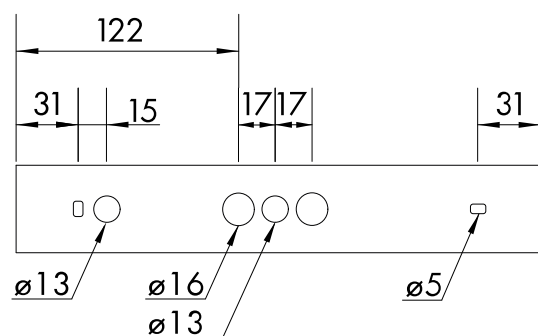

Article Table

DESCRIPTION	Order No.
Self-contained luminaire K2 self-control LED 3h-8h 230V AC Universal mounting, viewing distance: 27m	NLK2U003SC
Optional Accessories	
Recessed frame white for emergency luminaires NLK2U003SC	NLK2E
Wall bracket white f. emergency luminaires Design K2, K3	NLK1AW
Pendant 500 mm white for emergency luminaires	NLK1P105
Accu NiMH 4,8V 0,8 Ah for emergency luminaires Suitable for NLK1U003SC, NLK2U003SC, NLK3U003SC, NLS1W003SC, NLS1D003SC	NLAKKU4808