


Data Sheet for Article: NLK2U013SC

Self-contained luminaire K2 Autotest LED 3h 230V AC

Universal mounting, setting options 1h/ 2h/ 3h/ 8h for battery powered backup time, dimmable in mains mode, with LiFePO4 battery, viewing distance: 27m

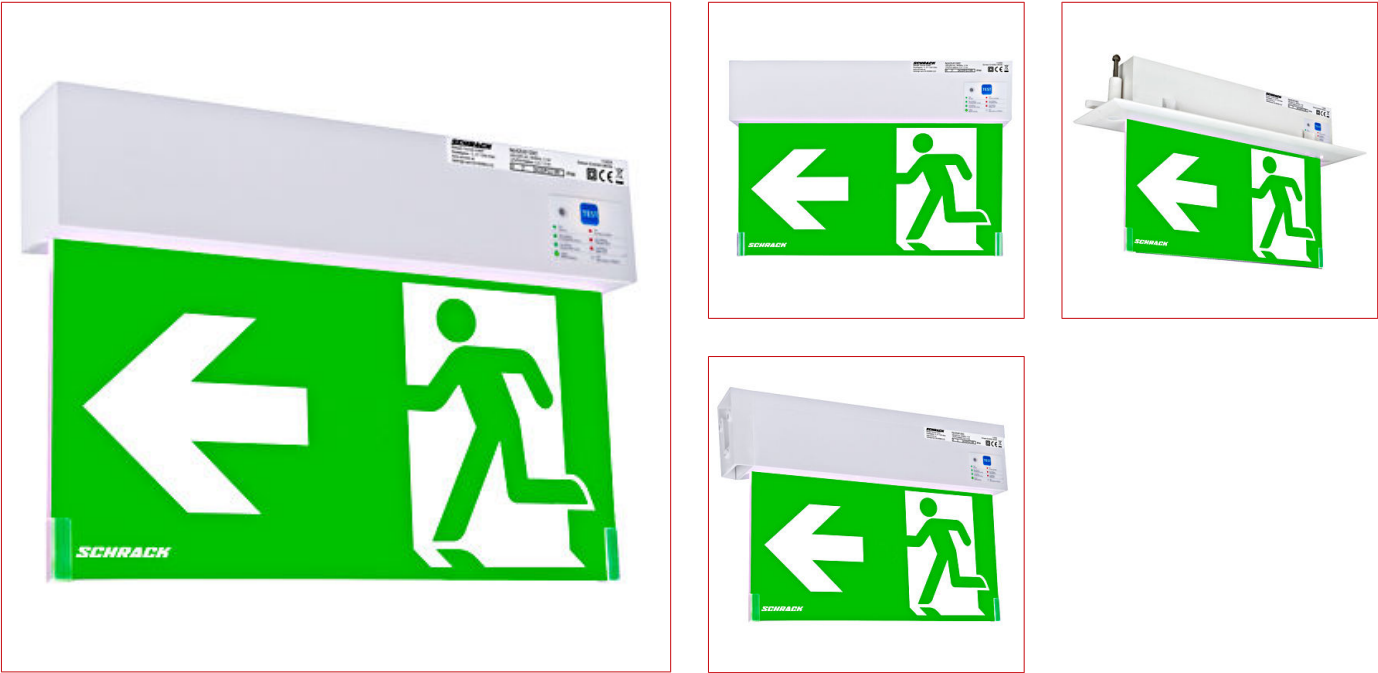

Technical Data


Net length (mm)	280,00
Net width (mm)	45,00
Net height (mm)	194,00
Net weight (kg)	0,65
Luminaire type	emergency sign luminaire
Self contained - central battery	Self contained luminaire
Function	self controlled
Version	Plastic luminaire
Design	K2
Halogen-free	Housing made of halogen-free plastic
Colour	White
Pictogram	Slide-in pictogram set (arrow left, right, bottom, top and white foil for single side use) included in accordance with ISO 7010

Technical Data - continued


Viewing distance (m)	27
Backup time (h)	8
Illuminant	LED (3W)
Voltage range (V)	230V AC 50Hz $\pm 20\%$
Battery (V/Ah)	3,2/1,5 LiFePO4
IP Rating	IP44
Impact Resistance	IK03
Mounting	surface mounting ceiling surface mounting wall recessed mounting ceiling optional universal
Min. ambient temperature (°C)	-5
Max. ambient temperature (°C)	40
AA Class E 8101	AA4
Manufacturer	Schrack

Dimensions (mm)


NLK2U

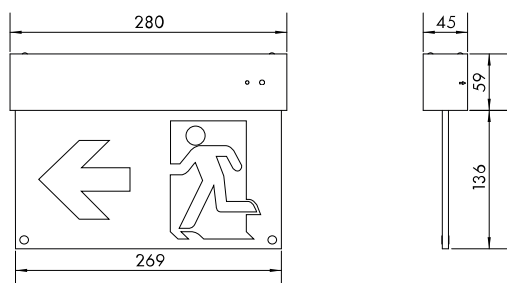


NLK2U + NLK2E

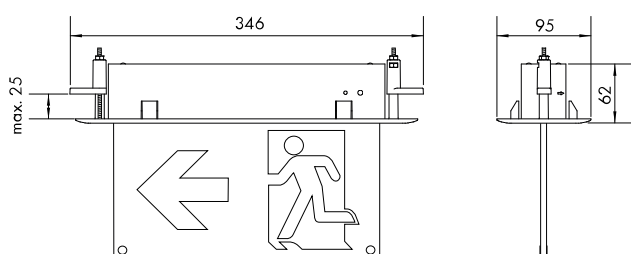

NLK2U + NLK1AW

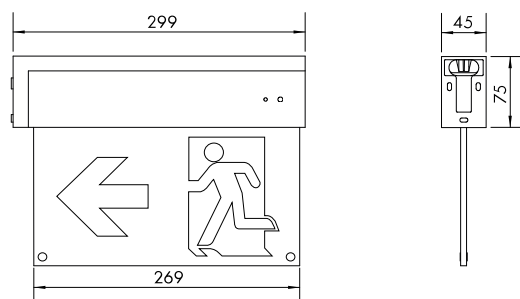

Dimensions (mm)

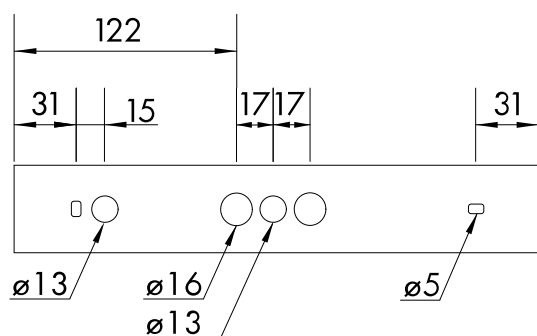

Article Table

DESCRIPTION	Order No.
Self-contained luminaire K2 Autotest LED 3h 230V AC	
Universal mounting, setting options 1h/ 2h/ 3h/ 8h for battery powered backup time, dimmable in mains mode, with LiFePO4 battery, viewing distance: 27m	NLK2U013SC
Optional Accessories	
Recessed frame white	NLK2E2
Required ceiling cut out: 320 x 75 mm	
Wall bracket white f. emergency luminaires Design K2, K3	NLK1AW
Pendant 500 mm white for emergency luminaires	NLK1P105
Accu LiFePO4 3,2V 1.5Ah	
for NLK2U013SC, NLK3U013SC, NLK8W013SC, NLK9XU003S, LiFePO4 - Lithium-iron phoshpate battery , UN3480 - UN 3480 : Lithium-Ion batteries	NLAKKU3215