


Self-contained luminaire K5 LED 3h 230V AC universal

130lm, NiCd 3,6V/1,5Ah, including pictogram sticker set, viewing distance: 20m

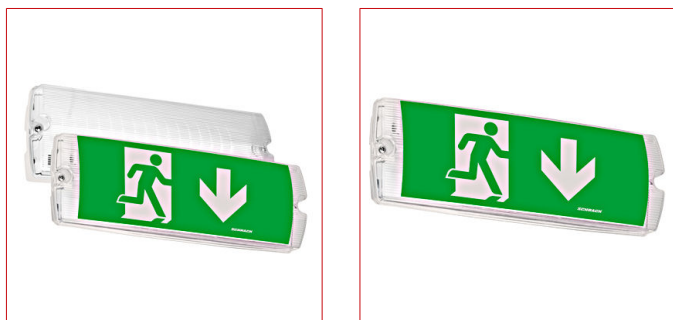

Technical Data


Net length (mm)	350,00
Net width (mm)	117,00
Net height (mm)	60,00
Net weight (kg)	0,60
Luminaire type	safety luminaire emergency sign luminaire
Self contained - central battery	Self contained luminaire
Function	standard
Version	Plastic luminaire
Design	K5
Halogen-free	Housing made of halogen-free plastic
Colour	White
Pictogram	Adhesive pictogram set (arrow left, right, bottom, top) included in accordance with ISO 7010
Viewing distance (m)	20
Backup time (h)	3
Illuminant	LED
Lumen	130
Voltage range (V)	230V AC 50Hz ±20%
Power (W)	3
Battery (V/Ah)	3,6/1,5 NiCd
IP Rating	IP65

Technical Data - continued


Impact Resistance	IK08
Mounting	surface mounting ceiling surface mounting wall universal
Min. ambient temperature (°C)	0
Max. ambient temperature (°C)	35
Manufacturer	Schrack

Dimensions (mm)

NLK5...

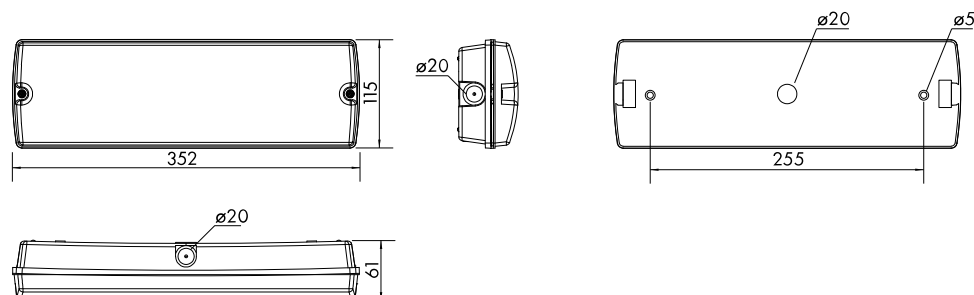

NLK5E...

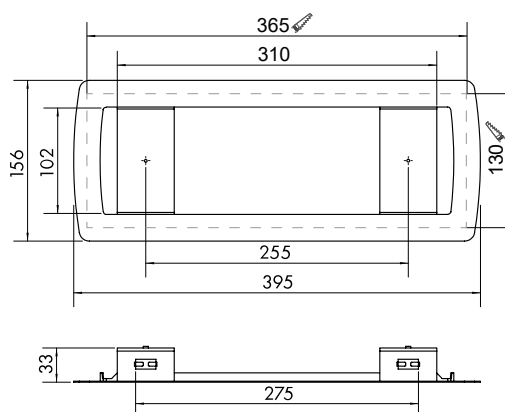

Distance table - min. illumination at the middle line: 1 lx - maintenance factor 0,80 3h autonomy time

Montagehöhe [m]					
2,00	2,30	5,80	6,56	7,68	2,86
2,50	2,41	6,20	6,97	7,77	2,88
3,00	2,34	6,59	7,49	8,38	3,00
3,50	2,27	6,80	7,56	8,29	3,04
4,00	2,04	6,64	7,61	8,46	2,91

Article Table

DESCRIPTION	Order No.
Self-contained luminaire K5 LED 3h 230V AC universal 130lm, NiCd 3,6V/1,5Ah, including pictogram sticker set, viewing distance: 20m	NLK5U003
Optional Accessories	
Hanging sign for emergency luminaires K5 with pictogram set according to ISO 7010 (arrow left, right, up, down and white foil for single side use), Viewing distance 25m	NLK5H2
Recessed frame white for emergency luminaires Design K5 Required ceiling cut out: 365 x 130 mm	NLK5E
Opal diffuser for emergency luminaires K5 with slide-in pictogram set according to ISO 7010 (arrow left, right, up, down), viewing distance 30m	NLK5OPAL
Hanging sign "fire extinguisher" for emergency luminaires K5 Double-sided suspension pictogram in accordance with ISO 7010 (F001), viewing distance 25m	NLK5H2FIR1
Hanging sign "fire hose" for emergency luminaires K5 Double-sided suspension pictogram in accordance with ISO 7010 (F002), viewing distance 25m	NLK5H2FIR2
Sticker pictogram set for emergency luminaires Design K5 according to ISO 7010 (arrows left, right, up, down), viewing distance 20m	NLK5P
Accu NiCd 3.6V 1.5Ah	NLAKKU3615