


KB emergency lumin. LED 230V AC 8h self control univ. mount

1h/3h/8h adjustable, modular version with optionally available pictogram panels with viewing distance 14m, 22m, 30m, 1h: 300lm; 3h: 300lm; 8h: 120lm

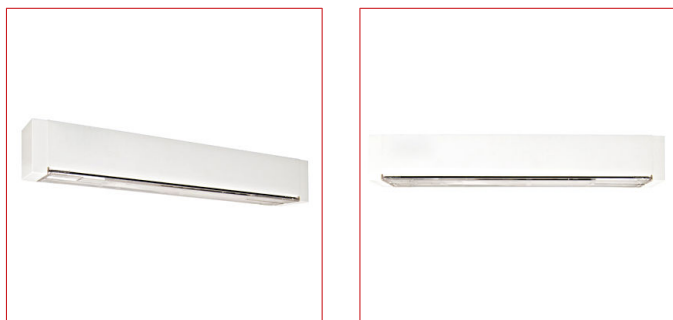



Technical Data

Net length (mm)	326,00
Net width (mm)	50,00
Net height (mm)	50,00
Net weight (kg)	0,90
Luminaire type	modular safety luminaire
Self contained - central battery	Self contained luminaire
Function	self controlled
Version	Plastic luminaire edge luminaire
Design	KB
Halogen-free	Housing made of halogen-free plastic
Colour	White
Backup time (h)	8
Illuminant	LED (3W)
Lumen	1h: 300;3h: 300;8h: 120
Voltage range (V)	230V AC 50Hz $\pm 20\%$
Battery (V/Ah)	9,6/2,0 NiMh
IP Rating	IP65
Impact Resistance	IK05



Technical Data - continued

Mounting	surface mounting ceiling surface mounting wall recessed mounting ceiling optional universal
AA Class E 8101	AA4
Manufacturer	Schrack

Dimensions (mm)

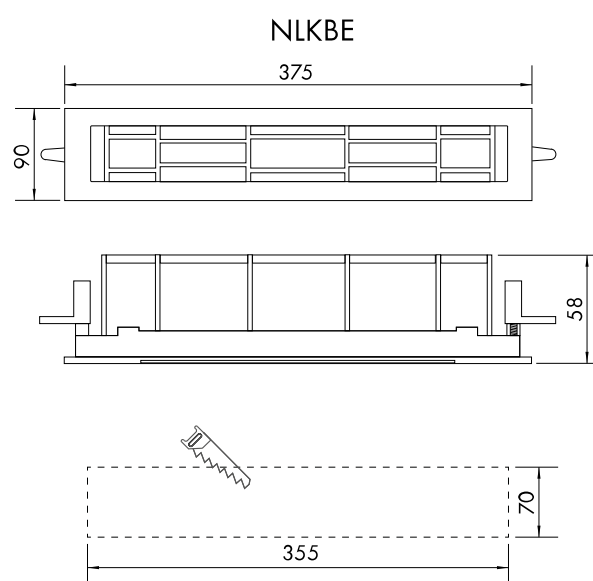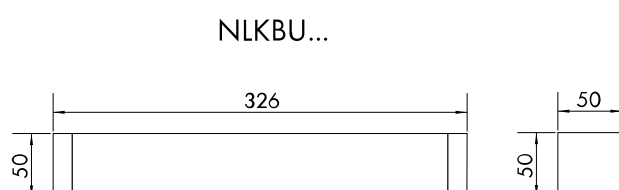


Drilling distances (mm)

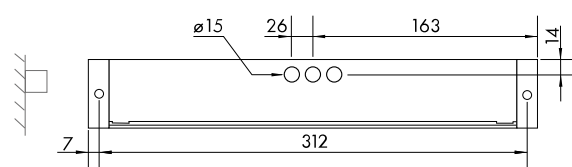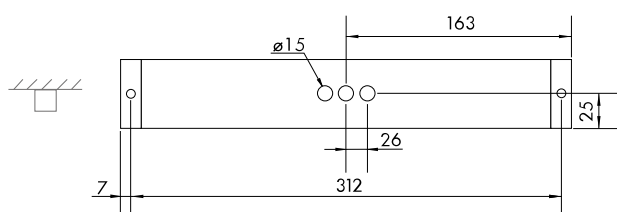


Dimensions (mm) optional pictogram edges


NLKBG

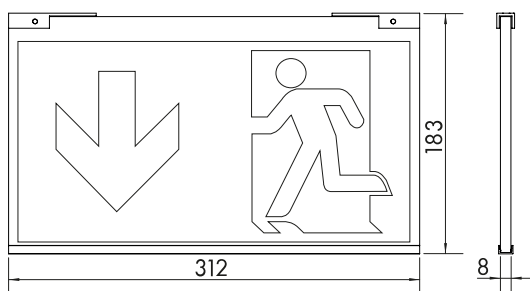

NLKBM

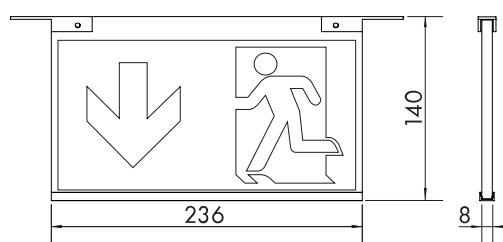

NLKBK

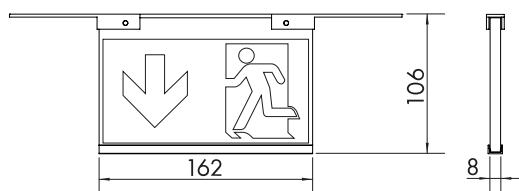

Distance table - min. illumination at the middle line: 1 lx - maintenance factor 0,80 -3h autonomy time

Montagehöhe [m]					
2.00	3,33	8,41	8,29	8,17	3,33
2.50	3,57	9,21	9,15	9,09	3,57
3.00	3,84	9,84	9,84	9,84	3,84
3.50	4,03	10,37	10,40	10,43	3,89
4.00	4,00	10,82	10,84	10,86	4,00

Distance table - min. illumination at the middle line: 1 lx - maintenance factor 0,80 -8h autonomy time

Montagehöhe [m]					
2.00	2,47	6,34	6,35	6,36	2,47
2.50	2,59	6,82	6,83	6,85	2,50
3.00	2,61	7,18	7,15	7,12	2,52
3.50	2,54	7,37	7,30	7,24	2,36
4.00	2,31	7,43	7,32	7,21	2,04

Article Table

DESCRIPTION	Order No.
KB emergency lumin. LED 230V AC 8h self control univ. mount 1h/3h/8h adjustable, modular version with optionally available pictogram panels with viewing distance 14m, 22m, 30m, 1h: 300lm; 3h: 300lm; 8h: 120lm	NLKBU008SC
Optional Accessories	
Edge for emergency luminaire Design KB incl. 4 pictos 22m	NLKBM
Edge for emergency luminaire Design KB incl. 4 pictos 30m	NLKBG
Edge for emergency luminaire Design KB incl. 4 pictos 14m	NLKBK
Rain cover for emergency luminaires Design KB plexiglass	NLKB RD
Recessed frame for emergency luminaire Design KB Required ceiling cut out: 355 x 70 mm	NLKBE
Concrete plaster box for emergency luminaire Design KB	NLKB BE
Accu NiMH 9,6V 2,0 Ah for self contained luminaires ERT-LED Suitable for LPU module	NLAKKU9620
Pendant 500 mm silver, prewired	NL2DS
Design-pendant pair 500 mm white, prewired	NL2DW
Pendant pair 500 mm white, prewired	NL2PW
Wall bracket white suitable for: KB, KX, KW, KCD, KE, GX, RX	NLAWX001
Design cord suspension 2000mm, 1 pair	NLDSA000
Cord suspension 2000mm, 1 pair	NLCORD2
Cord suspension 4000mm, 1 pair	NLCORD4