

Self-cont. luminaire KB Cool WirelessControl LED 3h 230V AC

Universal mounting, IP65, temp. range -30° up to 40°C, 6 x HP LED 0,5W, batteries and electronics in external IP54 housing (176 x 130 x 76mm) to be mounted outside the cold area, modular version with optionally available pictogram panels with viewing distance 14m, 22m, 30m, 150lm





Technical Data

Net length (mm)	326,00
Net width (mm)	50,00
Net height (mm)	50,00
Net weight (kg)	1,01
Luminaire type	modular safety luminaire
Self contained - central battery	Self contained luminaire
Function	WirelessControl Low Temperature
Version	Plastic luminaire
Design	KB
Halogen-free	Housing made of halogen-free plastic
Colour	White
Backup time (h)	3
Illuminant	LED (3W)
Lumen	150
Voltage range (V)	230V AC 50Hz ±20%
Power maintained mode (W)	7,50
Power non-maintained mode (W)	3,60
Power max. (W)	7,50
Battery (V/Ah)	12/0,8 NiMh



Technical Data - continued

IP Rating	IP65
Impact Resistance	IK05
Mounting	surface mounting ceiling surface mounting wall recessed mounting ceiling optional universal
Min. ambient temperature (°C)	-30
Max. ambient temperature (°C)	40
AA Class E 8101	AA3 AA4 AA5
Manufacturer	Schrack

Dimensions (mm)

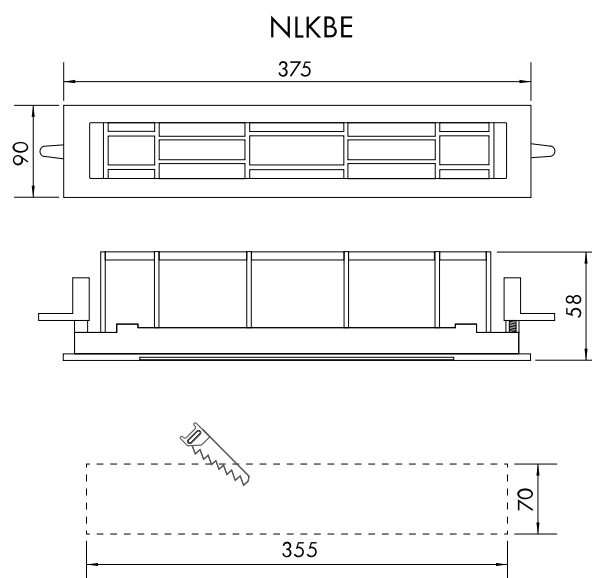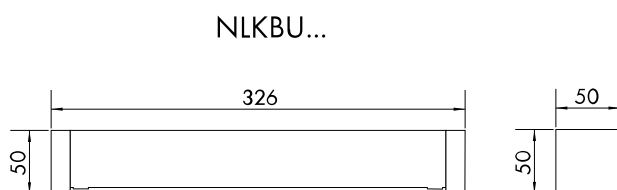


Drilling distances (mm)

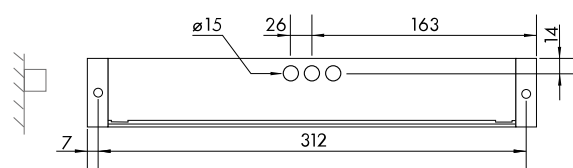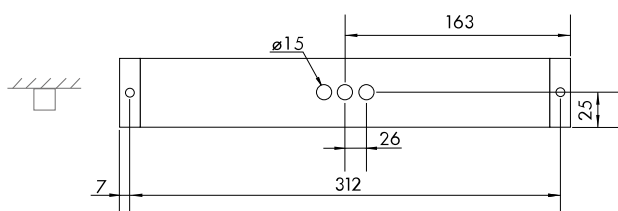


Dimensions (mm) optional pictogram edges


NLKBG

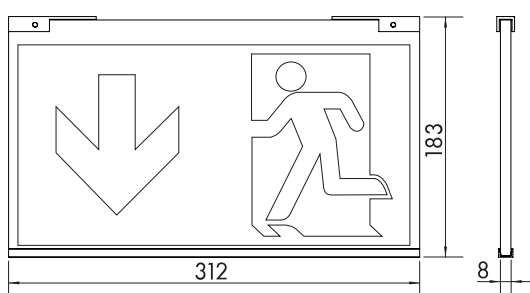


NLKBM

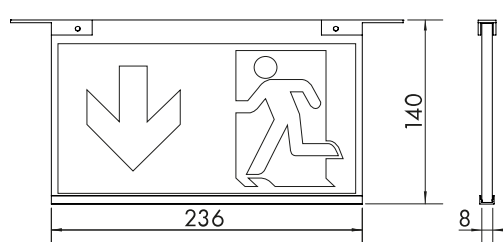

NLKBK

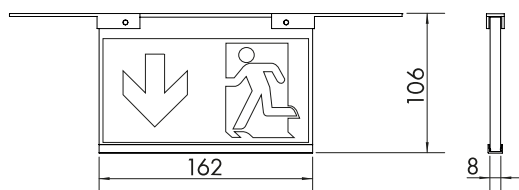

Dimensions (mm)

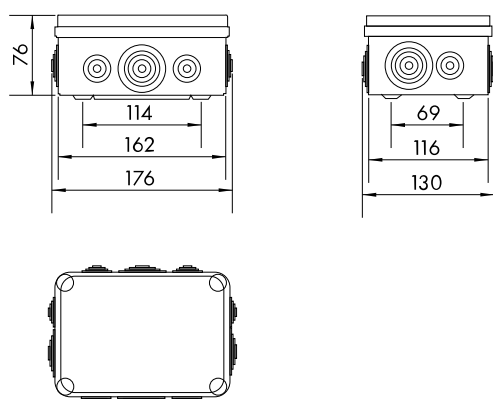

Abstandstabelle - Min. Beleuchtungsstärke auf der Mittellinie +/- 0,5m: 1lx - Wartungsfaktor 0,8, 3h Autonomiezeit

					
2,00	3,36	8,33	8,22	8,13	3,35
2,50	3,64	9,15	9,09	9,04	3,66
3,00	3,86	9,78	9,78	9,78	3,86
3,50	4,01	10,32	10,35	10,37	3,97
4,00	4,08	10,77	10,79	10,81	4,02
5,00	4,07	11,41	11,36	11,30	3,92
6,00	3,82	11,65	11,54	11,42	3,53
7,00	3,18	11,60	11,38	11,14	2,87
8,00	1,92	11,25	10,85	10,48	1,79

Article Table

DESCRIPTION	Order No.
Self-cont. luminaire KB Cool WirelessControl LED 3h 230V AC Universal mounting, IP65, temp. range -30° up to 40°C, 6 x HP LED 0,5W, batteries and electronics in external IP54 housing (176 x 130 x 76mm) to be mounted outside the cold area, modular version with optionally available pictogram panels with viewing distance 14m, 22m, 30m, 150lm	NLKBU03WL
Optional Accessories	
Edge for emergency luminaire Design KB incl. 4 pictos 22m	NLKBM
Edge for emergency luminaire Design KB incl. 4 pictos 30m	NLKBG
Edge for emergency luminaire Design KB incl. 4 pictos 14m	NLKBK
Rain cover for emergency luminaires Design KB plexiglass	NLKB RD
Recessed frame for emergency luminaire Design KB Required ceiling cut out: 355 x 70 mm	NLKB E
Concrete plaster box for emergency luminaire Design KB	NLKB B E
Parallel wallbracket white, suitable for: KB	NLAWW008
Accu NiMH 12V 0,8Ah f.luminaires BusControl, WirelessControl	NLAKKU1208
Pendant 500 mm silver, prewired	NL2DS
Design-pendant pair 500 mm white, prewired	NL2DW
Pendant pair 500 mm white, prewired	NL2PW
Wall bracket white suitable for: KB, KX, KW, KCD, KE, GX, RX	NLAWX001
Design cord suspension 2000mm, 1 pair	NLDSA000
Cord suspension 2000mm, 1 pair	NLCORD2
Cord suspension 4000mm, 1 pair	NLCORD4