

Data Sheet for Article: NLKCDP001S

Self-contained luminaire KC self-contr. LED 3h 230V AC ceil.

Setting options 1 h/3 h, viewing distance: 30m, 1h: 300lm; 3h: 150lm



Technical Data


Net length (mm)	356,00
Net width (mm)	179,00
Net height (mm)	108,00
Net weight (kg)	1,00
Luminaire type	emergency sign luminaire
Self contained - central battery	Self contained luminaire
Function	self controlled
Version	Plastic luminaire
Design	KC
Halogen-free	Housing made of halogen-free plastic
Colour	White
Viewing distance (m)	30
Backup time (h)	3
Illuminant	LED (3W)

Technical Data - continued


Lumen	1h: 300;3h: 150
Voltage range (V)	230V AC 50Hz $\pm 20\%$
Battery (V/Ah)	2x 3,2V/3,3Ah LiFePO4
IP Rating	IP40
Mounting	surface mounting ceiling
AA Class E 8101	AA4
Manufacturer	Schrack

Abmessungen (mm)

NLKCD...

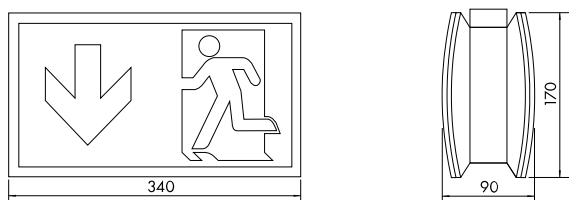

Bohrabstände (mm)

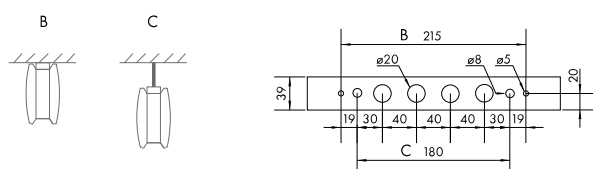

Article Table

DESCRIPTION	Order No.
Self-contained luminaire KC self-contr. LED 3h 230V AC ceil. Setting options 1 h/3 h, viewing distance: 30m, 1h: 300lm; 3h: 150lm	NLKCDP001S
Optional Accessories	
Wall bracket white, plastic, for luminaire NLKCD..	NLAWWKC
Accu NiMH 4,8V 2,0Ah for self contained luminaires LED LPU or LEM module	NLAKKU4820
Pendant pair 500 mm white, prewired	NL2PW
Wall bracket white suitable for: KB, KX, KW, KCD, KE, GX, RX	NLAWX001
Design cord suspension 2000mm, 1 pair	NLDSA000
Cord suspension 2000mm, 1 pair	NLCORD2
Cord suspension 4000mm, 1 pair	NLCORD4
Plug-pictogram left top for Design KC viewing distance: 30m	NLKCPIKTLO
Plug-pictogram left bottom for Design KC viewing distance: 30m	NLKCPIKTLU
Plug-pictogram right top for Design KC viewing distance: 30m	NLKCPIKTRO
Plug-pictogram right bottom for Design KC viewing distance: 30m	NLKCPIKTRU