

Emerg. luminaire KC Wireless LED 3h 230V AC ceiling

viewing distance: 30m



Technical Data

Net length (mm)	356,00
Net width (mm)	179,00
Net height (mm)	108,00
Net weight (kg)	1,00
Luminaire type	emergency sign luminaire
Self contained - central battery	Self contained luminaire
Function	WirelessControl Professional
Version	Plastic luminaire
Design	KC
Halogen-free	Housing made of halogen-free plastic
Colour	White
Pictogram	Slide-in pictogram set (arrow left, right, bottom, top) included in accordance with ISO 7010
Viewing distance (m)	30
Backup time (h)	3
Illuminant	LED (3W)
Lumen	150
Voltage range (V)	230V AC 50Hz ±20%
Battery (V/Ah)	12/0,8 NiMh
IP Rating	IP40
Mounting	surface mounting ceiling
AA Class E 8101	AA4


Technical Data - continued

Manufacturer


Schrack

Dimensions (mm)

NLKCD...

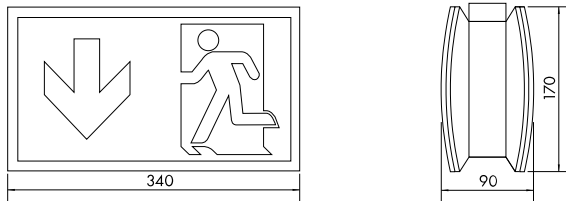

Drilling distances (mm)

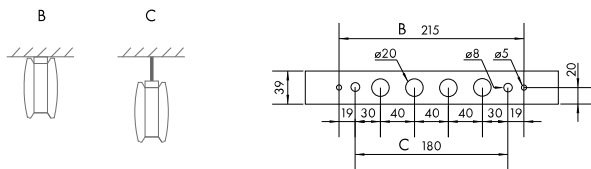

Article Table

DESCRIPTION	Order No.
Emerg. luminaire KC Wireless LED 3h 230V AC ceiling viewing distance: 30m	NLKCDP003W
Optional Accessories	
Wall bracket white, plastic, for luminaire NLKCD..	NLAWWKC
Accu NiMH 12V 0,8Ah f.luminaires BusControl, WirelessControl	NLAKKU1208
Pendant pair 500 mm white, prewired	NL2PW
Wall bracket white suitable for: KB, KX, KW, KCD, KE, GX, RX	NLAWX001
Design cord suspension 2000mm, 1 pair	NLDSA000
Cord suspension 2000mm, 1 pair	NLCORD2
Cord suspension 4000mm, 1 pair	NLCORD4
Plug-pictogram left top for Design KC viewing distance: 30m	NLKCPIKTLO
Plug-pictogram left bottom for Design KC viewing distance: 30m	NLKCPIKTLU
Plug-pictogram right top for Design KC viewing distance: 30m	NLKCPIKTRO
Plug-pictogram right bottom for Design KC viewing distance: 30m	NLKCPIKTRU