

Data Sheet for Article: NLKCDP401S

Self-contained luminaire KC self-contr. LED 3h 230V AC ceil.

Setting options 1 h/3 h, viewing distance: 30m, 1h: 300lm; 3h: 150lm



Technical Data


Net length (mm)	356,00
Net width (mm)	179,00
Net height (mm)	108,00
Net weight (kg)	1,00
Luminaire type	emergency sign luminaire
Self contained - central battery	Self contained luminaire
Function	self controlled
Version	Plastic luminaire
Design	KC
Halogen-free	Housing made of halogen-free plastic
Colour	White
Viewing distance (m)	30
Backup time (h)	3
Illuminant	LED (3W)

Technical Data - continued


Lumen	1h: 300;3h: 150
Voltage range (V)	230V AC 50Hz $\pm 20\%$
Battery (V/Ah)	2x 3,2V/1,6Ah LiFePO4
IP Rating	IP40
Impact Resistance	$\geq IK03$
Mounting	surface mounting ceiling
AA Class E 8101	AA4
Manufacturer	Schrack

Abmessungen (mm)

NLKCD...

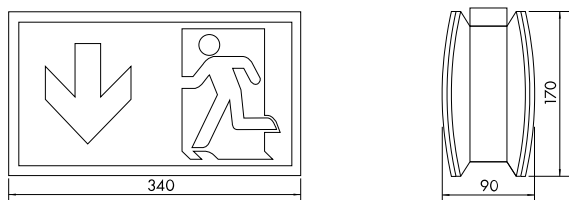

Bohrabstände (mm)

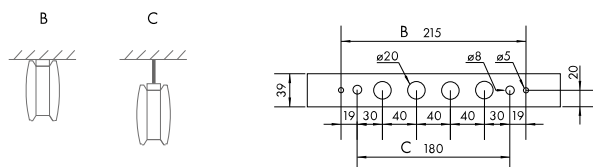

Article Table

DESCRIPTION	Order No.
Self-contained luminaire KC self-contr. LED 3h 230V AC ceil. Setting options 1 h/3 h, viewing distance: 30m, 1h: 300lm; 3h: 150lm	NLKCDP401S
Optional Accessories	
Wall bracket white, plastic, for luminaire NLKCD..	NLAWWKC
Pendant pair 500 mm white, prewired	NL2PW
Wall bracket white suitable for: KB, KX, KW, KCD, KE, GX, RX	NLAWX001
Design cord suspension 2000mm, 1 pair	NLDSA000
Cord suspension 2000mm, 1 pair	NLCORD2
Cord suspension 4000mm, 1 pair	NLCORD4
Plug-pictogram left top for Design KC viewing distance: 30m	NLKCIPTLO
Plug-pictogram left bottom for Design KC viewing distance: 30m	NLKCIPTLU
Plug-pictogram right top for Design KC viewing distance: 30m	NLKCIPTRO
Plug-pictogram right bottom for Design KC viewing distance: 30m	NLKCIPTRU