

Data Sheet for Article: NLKCDP509C

Emergency luminaire KC 6x0, 5W LED CC24 24V, ceiling mounting

with supervision - centrally switchable, viewing distance: 30m



Technical Data


Net length (mm)	356,00
Net width (mm)	179,00
Net height (mm)	108,00
Net weight (kg)	1,00
Luminaire type	emergency sign luminaire
Self contained - central battery	Central power supply luminaire
Function	24V Core24 with supervision- centrally switchable
Version	Plastic luminaire
Design	KC
Halogen-free	Housing made of halogen-free plastic
Colour	White
Pictogram	Slide-in pictogram set (arrow left, right, bottom, top) included in accordance with ISO 7010
Viewing distance (m)	30

Technical Data - continued


Illuminant	LED (3W)
Lumen	300
Voltage range (V)	24V AC
Power maintained mode (W)	4,20
Power non-maintained mode (W)	0,40
Power max. (W)	4,20
IP Rating	IP40
Impact Resistance	≥ IK03
Mounting	surface mounting ceiling
Min. ambient temperature (°C)	-20
Max. ambient temperature (°C)	40
AA Class E 8101	AA4
Manufacturer	Schrack

Dimensioned drawing: Emergency luminaire KC 6x0,5W LED CC24 24V, ceiling mounting

NLKCD...

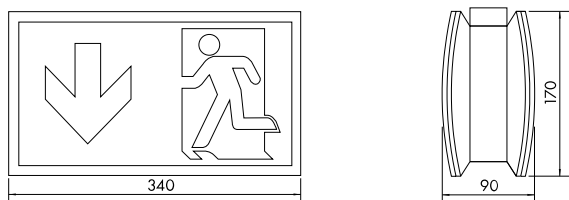

Dimensioned drawing: Emergency luminaire KC 6x0,5W LED CC24 24V, ceiling mounting

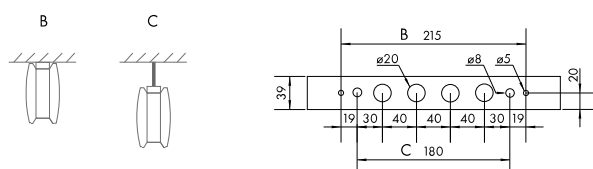

Article Table

DESCRIPTION	Order No.
Emergency luminaire KC 6x0,5W LED CC24 24V, ceiling mounting with supervision - centrally switchable, viewing distance: 30m	NLKCDP509C
Optional Accessories	
Wall bracket white, plastic, for luminaire NLKCD..	NLAWWKC
Pendant pair 500 mm white, prewired	NL2PW
Wall bracket white suitable for: KB, KX, KW, KCD, KE, GX, RX	NLAWX001
Design cord suspension 2000mm, 1 pair	NLDSA000
Cord suspension 2000mm, 1 pair	NLCORD2
Cord suspension 4000mm, 1 pair	NLCORD4
Plug-pictogram left top for Design KC viewing distance: 30m	NLKCIPTLO
Plug-pictogram left bottom for Design KC viewing distance: 30m	NLKCIPTLU
Plug-pictogram right top for Design KC viewing distance: 30m	NLKCIPTRO
Plug-pictogram right bottom for Design KC viewing distance: 30m	NLKCIPTRU