

Data Sheet for Article: NLKCDP818-

Emergency luminaire KC 8W 230V el. ballast ceiling mounting

viewing distance: 30m




Technical Data


Net length (mm)	356,00
Net width (mm)	179,00
Net height (mm)	108,00
Net weight (kg)	1,00
Luminaire type	emergency sign luminaire
Self contained - central battery	Central power supply luminaire
Function	standard
Version	Plastic luminaire
Design	KC
Halogen-free	Housing made of halogen-free plastic
Colour	White
Viewing distance (m)	30
Illuminant	T5 (8W)
Lumen	450
Voltage range (V)	230V AC 50Hz $\pm 20\%$; 230V DC $\pm 20\%$
IP Rating	IP40
Mounting	surface mounting ceiling

Dimensions (mm)

NLKCD...

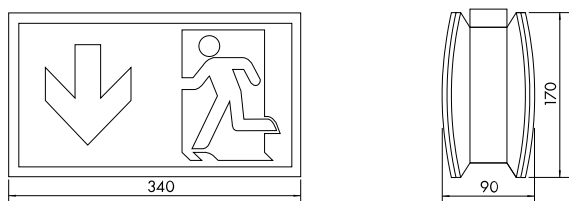

Drilling distances (mm)

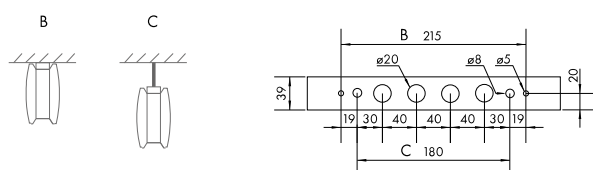

Article Table

DESCRIPTION	Order No.
Emergency luminaire KC 8W 230V el. ballast ceiling mounting viewing distance: 30m	NLKCDP818
Optional Accessories	
Wall bracket white, plastic, for luminaire NLKCD..	NLAWWKC
Pendant pair 500 mm white, prewired	NL2PW
Wall bracket white suitable for: KB, KX, KW, KCD, KE, GX, RX	NLAWX001
Design cord suspension 2000mm, 1 pair	NLDSA000
Cord suspension 2000mm, 1 pair	NLCORD2
Cord suspension 4000mm, 1 pair	NLCORD4
Plug-pictogram left top for Design KC viewing distance: 30m	NLKCIPTLO
Plug-pictogram left bottom for Design KC viewing distance: 30m	NLKCIPTLU
Plug-pictogram right top for Design KC viewing distance: 30m	NLKCIPTRO
Plug-pictogram right bottom for Design KC viewing distance: 30m	NLKCIPTRU