


Data Sheet for Article: NLKCDZ403S

Emergency lighting module for NLKCD autotest 3h

Complete replacement insert for fast upgrade 8W LL to LED, Autotest version with high-quality LiFePO4 battery, adjustable to 1h/3h/8h

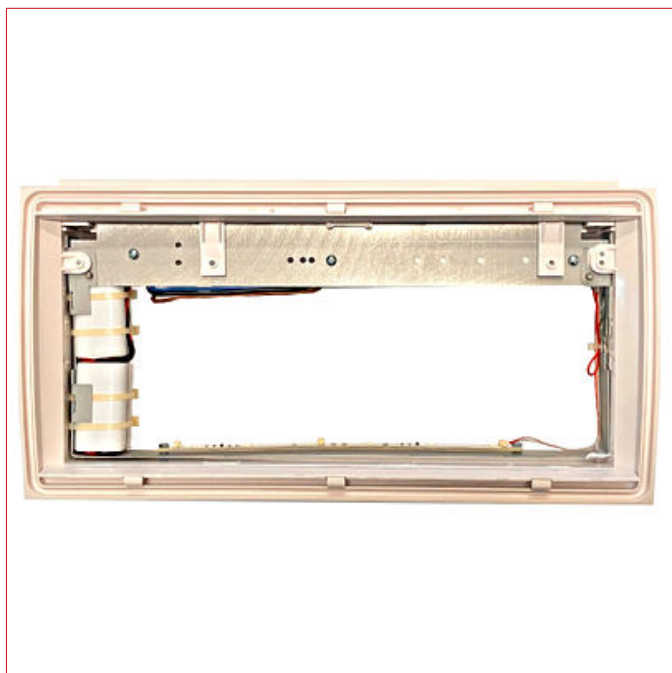

Technical Data

Net length (mm)	305,00
Net height (mm)	135,00
Netto depth (mm)	50,00
Net weight (kg)	0,60
Self contained - central battery	Self contained luminaire
Function	self controlled
Version	accessories
Design	KC
Illuminant	LED (3W)
Lumen	190
Voltage range (V)	230V AC 50Hz ±20%
Power maintained mode (W)	3,30
Power non-maintained mode (W)	0,40
Power max. (W)	4,20
Battery (V/Ah)	2x 3,2V/1,6Ah LiFePO4
Impact Resistance	≥ IK03

Technical Data - continued

Min. ambient temperature (°C)	5
Max. ambient temperature (°C)	50
AA Class E 8101	AA4
Manufacturer	Schrack

Article Table

DESCRIPTION	Order No.
Emergency lighting module for NLKCD autotest 3h	
Complete replacement insert for fast upgrade 8W LL to LED, Autotest version with high-quality LiFePO4 battery, adjustable to 1h/3h/8h	NLKCDZ403S
Optional Accessories	
Set 2 accus LiFePO4 3,2V 1,6Ah f. luminaires. w. LEO or LPK	NLAKKU3216
LiFePO4 - Lithium-iron phosphat battery , UN3480 - UN 3480 : Lithium-Ion batteries	NLTESTSC2
Protective cover for test buttons NLTEST2---	NLTEST2COV