


Self-contained lumin. KC selfcontrol LED/ 1h 3h 230V AC wall

Exit sign: wall mounting, safety light: ceiling mounting, viewing distance: 30m, 1h: 300lm; 3h: 300lm; 8h: 120lm

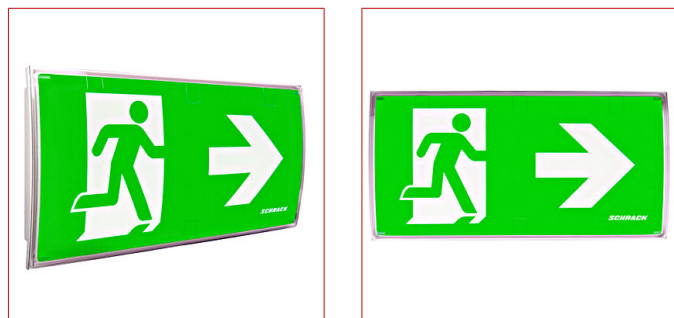

Technical Data


Net length (mm)	357,00
Net width (mm)	176,00
Net height (mm)	73,00
Net weight (kg)	0,80
Luminaire type	emergency sign luminaire
Self contained - central battery	Self contained luminaire
Function	self controlled
Version	Plastic luminaire
Design	KC
Halogen-free	Housing made of halogen-free plastic
Colour	White
Pictogram	Slide-in pictogram set (arrow left, right, bottom, top) included in accordance with ISO 7010
Viewing distance (m)	30
Backup time (h)	3
Illuminant	LED (3W)
Lumen	1h: 300;3h: 300;8h: 120
Voltage range (V)	230V AC 50Hz ±20%
Battery (V/Ah)	9,6/2,0 NiMh
IP Rating	IP54
Impact Resistance	≥ IK03

Technical Data - continued


Mounting	surface mounting wall
AA Class E 8101	AA4
Manufacturer	Schrack

Dimensions (mm)

NLKCW...

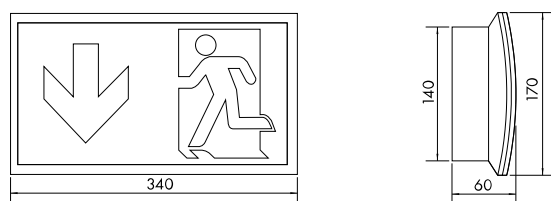

Drilling distances (mm)

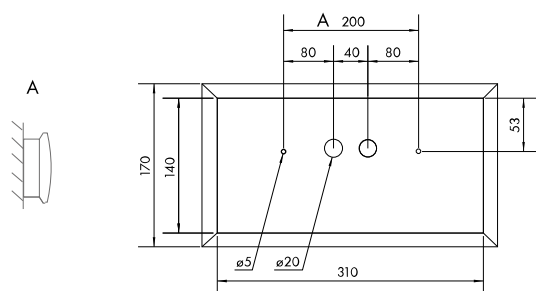

Distance table - min. illumination at the middle line: 1 lx - maintenance factor 0,80 1h-3h autonomy time

Montagehöhe [m]					
2.00	3,33	8,29	8,25	8,22	3,33
2.50	3,57	9,09	9,13	9,18	3,71
3.00	3,84	9,78	9,87	9,96	3,84
3.50	4,03	10,35	10,46	10,57	4,03
4.00	3,86	10,84	10,94	11,05	4,14

Article Table

DESCRIPTION	Order No.
Self-contained lumin. KC selfcontrol LED/1h 3h 230V AC wall	NLKCWP003S
Exit sign: wall mounting, safety light: ceiling mounting, viewing distance: 30m, 1h: 300lm; 3h: 300lm; 8h: 120lm	
Optional Accessories	
Rain cover for emergency luminaires Design KC plexiglass	NLKCRD
Concrete Plaster Box for Emergency luminaires Design KC	NLKCBERO
Recessed Frame for Emergency luminaires Design KC	NLKCER00
Required ceiling cut out: 320 x 150 mm	
IP65 Sealing for (NLKCW..)	NLKCIP65
Clear cover with hanging pictogram vd 24m for NLKCW..	NLKCH
Transparent Cover for Emergency luminaire Design KC	NLKCPR
Accu NiMH 9,6V 2,0 Ah for self contained luminaires ERT-LED	NLAKKU9620
Suitable for LPU module	
Ball Protection for KC, KB+KBG, KX, PF, LX, C2	NLBALL2
Plug-pictogram left top for Design KC viewing distance: 30m	NLKCPIKTLO
Plug-pictogram left bottom for Design KC viewing distance: 30m	NLKCPIKTLU
Plug-pictogram right top for Design KC viewing distance: 30m	NLKCPIKTRO
Plug-pictogram right bottom for Design KC viewing distance: 30m	NLKCPIKTRU