


Emergency luminaire KC ERT-LED 230V wall m.

Exit sign: wall mounting, safety light: ceiling mounting, viewing distance: 30m, 520lm

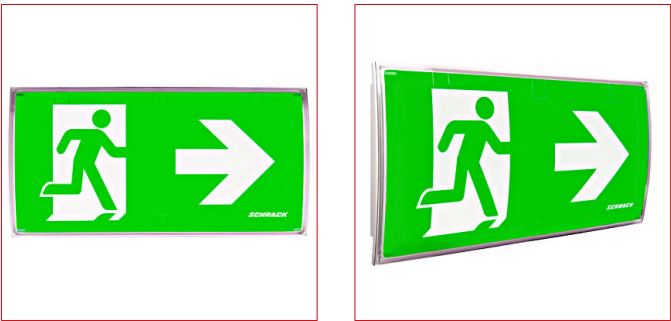

Technical Data


Net length (mm)	340,00
Net width (mm)	60,00
Net height (mm)	170,00
Net weight (kg)	0,80
Luminaire type	safety luminaire emergency sign luminaire Combined rescue path and rescue sign luminaire
Self contained - central battery	Central power supply luminaire
Function	standard
Version	Plastic luminaire
Design	KC
Halogen-free	Housing made of halogen-free plastic
Colour	RAL 9003 (white)
Pictogram	Slide-in pictogram set (arrow left, right, bottom, top) included in accordance with ISO 7010
Viewing distance (m)	30
Illuminant	ERT-LED (4W)
Lumen	520
Voltage range (V)	230V AC 50Hz $\pm 20\%$; 230V DC $\pm 20\%$
Power maintained mode (W)	4,60
Power max. (W)	4,60
IP Rating	IP54

Technical Data - continued


Impact Resistance	≥ IK03
Mounting	surface mounting ceiling surface mounting wall recessed mounting ceiling optional universal
AA Class E 8101	AA3 AA4 AA5
Manufacturer	Schrack

Dimensions (mm)

NLKCW...

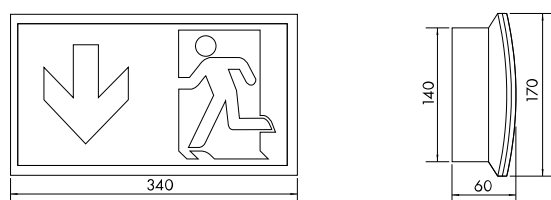

Drilling distances (mm)

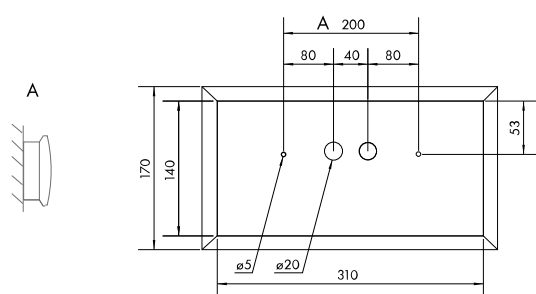

Spacing table - Min. illuminance on the center line +/- 0.5 m: 1 lx - Maintenance factor 0.80

					
2,00	8,02	16,92	13,18	9,73	3,95
2,50	10,02	21,15	16,48	12,17	4,94
3,00	12,03	25,39	19,78	14,60	5,92
3,50	14,03	29,62	23,08	17,04	6,91
4,00	16,04	33,85	26,37	19,47	7,90
5,00	20,01	42,21	32,97	24,34	9,88
6,00	23,16	49,44	37,56	26,34	10,36
7,00	26,11	56,24	41,79	28,02	10,81
8,00	28,42	62,69	45,68	29,07	10,99
9,00	30,57	68,82	49,39	29,83	11,01
10,00	32,59	74,61	52,67	30,66	11,09
12,00	34,70	83,69	57,81	30,92	11,32
14,00	33,46	91,92	61,33	31,36	11,08
16,00	32,82	96,18	61,09	32,14	10,60

Article Table

DESCRIPTION	Order No.
Emergency luminaire KC ERT-LED 230V wall m. Exit sign: wall mounting, safety light: ceiling mounting, viewing distance: 30m, 520lm	NLKCWP039
Optional Accessories	
Rain cover for emergency luminaires Design KC plexiglass	NLKCRD
Concrete Plaster Box for Emergency luminaires Design KC	NLKCBERO
Recessed Frame for Emergency luminaires Design KC Required ceiling cut out: 320 x 150 mm	NLK CER00
IP65 Sealing for (NLKCW..)	NLKCIP65
Clear cover with hanging pictogram vd 24m for NLKCW..	NLKCH
Ball Protection for KC, KB+KBG, KX, PF, LX, C2 l x h x d: 450 x 280 x 125mm	NLBALL2
Plug-pictogram left top for Design KC viewing distance: 30m	NLKCPIKTLO
Plug-pictogram left bottom for Design KC viewing distance: 30m	NLKCPIKTLU
Plug-pictogram right top for Design KC viewing distance: 30m	NLKCPIKTRO
Plug-pictogram right bottom for Design KC viewing distance: 30m	NLKCPIKTRU