

Emergency luminaire KC 4x1W ERT-LED 24V CC24

exit sign: wall mounting, safety light: ceiling mounting, with supervision - centrally switchable, viewing distance: 30m, 520lm



Technical Data



Net length (mm)	340,00
Net width (mm)	60,00
Net height (mm)	170,00
Net weight (kg)	0,80
Luminaire type	safety luminaire emergency sign luminaire Combined rescue path and rescue sign luminaire
Self contained - central battery	Central power supply luminaire
Function	24V Core24 with supervision- centrally switchable
Version	Plastic luminaire
Design	KC
Halogen-free	Housing made of halogen-free plastic
Colour	RAL 9003 (white)

Technical Data - continued


Pictogram	Slide-in pictogram set (arrow left, right, bottom, top) included in accordance with ISO 7010
Viewing distance (m)	30
Illuminant	ERT-LED (4W)
Lumen	520
Voltage range (V)	24V AC
Power maintained mode (W)	5, 10
Power non-maintained mode (W)	0, 40
Power max. (W)	5, 10
IP Rating	IP54
Impact Resistance	≥ IK03
Mounting	surface mounting ceiling surface mounting wall recessed mounting ceiling optional universal
Min. ambient temperature (°C)	-30
Max. ambient temperature (°C)	55
AA Class E 8101	AA3 AA4 AA5
Manufacturer	Schrack

Abmessungen (mm)

NLKCW...



Bohrabstände (mm)

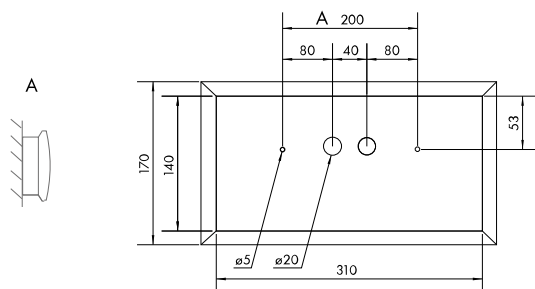

Abstandstabelle - Min. Beleuchtungsstärke auf der Mittellinie +/- 0,5m: 1lx - Wartungsfaktor 0,80

					
2,00	7,46	16,10	12,32	8,50	3,32
2,50	8,65	19,35	14,27	9,17	3,48
3,00	9,70	22,33	16,04	9,57	3,49
3,50	10,26	24,67	17,34	9,86	3,58
4,00	10,22	26,82	18,49	9,84	3,55
5,00	9,64	29,31	18,53	10,16	3,36
6,00	9,44	29,02	18,32	10,01	3,07
7,00	9,36	28,37	18,06	9,55	2,71
8,00	9,38	27,64	17,68	8,94	2,06
9,00	4,66	27,19	15,25	8,45	1,44

Article Table

DESCRIPTION	Order No.
Emergency luminaire KC 4x1W ERT-LED 24V CC24 exit sign: wall mounting, safety light: ceiling mounting, with supervision - centrally switchable, viewing distance: 30m, 520lm	NLKCWP539C
Optional Accessories	
Rain cover for emergency luminaires Design KC plexiglass	NLKCRD
Concrete Plaster Box for Emergency luminaires Design KC	NLKCBERO
Recessed Frame for Emergency luminaires Design KC Required ceiling cut out: 320 x 150 mm	NLKCER00
IP65 Sealing for (NLKCW..)	NLKCIP65
Clear cover with hanging pictogram vd 24m for NLKCW..	NLKCH
Transparent Cover for Emergency luminaire Design KC	NLKCPR
Ball Protection for KC, KB+KBG, KX, PF, LX, C2	NLBALL2
Plug-pictogram left top for Design KC viewing distance: 30m	NLKCPIKTLO

Article Table

DESCRIPTION	Order No.
Optional Accessories	
Plug-pictogram left bottom for Design KC viewing distance: 30m	NLKCPIKTLU
Plug-pictogram right top for Design KC viewing distance: 30m	NLKCPIKTRO
Plug-pictogram right bottom for Design KC viewing distance: 30m	NLKCPIKTRU