


Data Sheet for Article: NLKDU003WL

Emerg. luminaire KD Wireless LED 3h 230V AC uni.m.

viewing distance: 22m

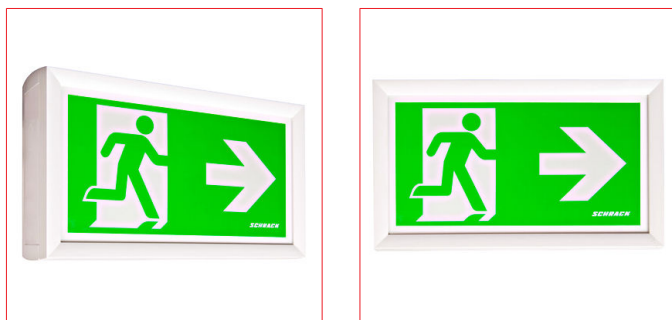

Technical Data

Net length (mm)	260,00
Net width (mm)	70,00
Net height (mm)	155,00
Net weight (kg)	0,70
Luminaire type	emergency sign luminaire
Self contained - central battery	Self contained luminaire
Function	WirelessControl Professional
Version	Plastic luminaire
Design	KD
Halogen-free	Housing made of halogen-free plastic
Colour	White
Viewing distance (m)	22
Backup time (h)	3
Illuminant	HP-LED (3W)
Lumen	150
Voltage range (V)	230V AC 50Hz ±20%
Battery (V/Ah)	12/0,8 NiMh
IP Rating	IP54
Mounting	surface mounting ceiling surface mounting wall universal
AA Class E 8101	AA4


Technical Data - continued

Manufacturer


Schrack

Dimensions (mm)



NLKDU...

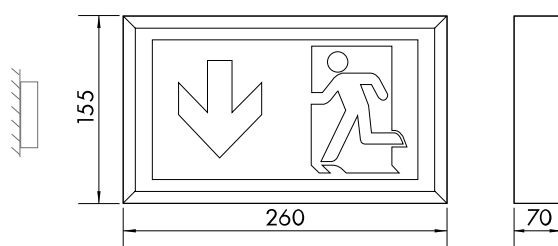

NLKDU...

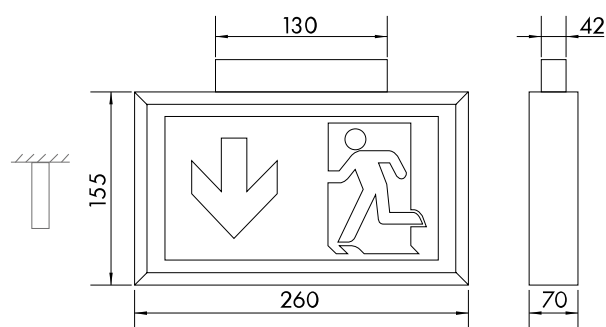

Drilling distances (mm)

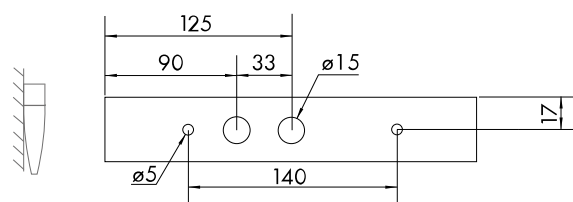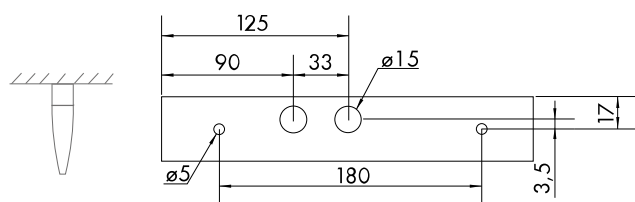

Article Table

DESCRIPTION	Order No.
Emerg. luminaire KD Wireless LED 3h 230V AC uni.m. viewing distance: 22m	NLKDU003WL
Optional Accessories	
Accu NiMH 12V 0,8Ah f.luminaires BusControl, WirelessControl	NLAKKU1208
Pendant 500 mm silver, prewired	NL2DS
Design-pendant pair 500 mm white, prewired	NL2DW
Pendant pair 500 mm white, prewired	NL2PW
Ball Protection for KD, KM, KS, LM, VM, RI, RM	NLBALL1
Design cord suspension 2000mm, 1 pair	NLDSA000
Cord suspension 2000mm, 1 pair	NLCORD2
Cord suspension 4000mm, 1 pair	NLCORD4