

Data Sheet for Article: NLKEU003WL

Emerg. Luminaire KE Wireless LED 3h 230V AC uni.m.




Technical Data

Net length (mm)	332,00
Net width (mm)	48,00
Net height (mm)	72,00
Net weight (kg)	0,40
Luminaire type	safety luminaire
Self contained - central battery	Self contained luminaire
Function	WirelessControl Professional
Version	Plastic luminaire
Design	KE
Halogen-free	Housing made of halogen-free plastic
Colour	White
Backup time (h)	3
Illuminant	HP-LED (3W)
Lumen	150
Voltage range (V)	230V AC 50Hz ±20%
Battery (V/Ah)	12/0,8 NiMh
IP Rating	IP40
Mounting	surface mounting ceiling surface mounting wall recessed mounting ceiling universal
AA Class E 8101	AA4
Manufacturer	Schrack

Dimensions (mm)



NLKE...






NLKE... + NLKEE



NLKEE

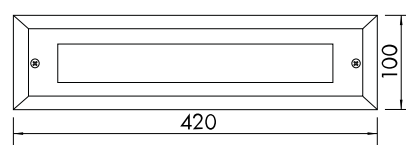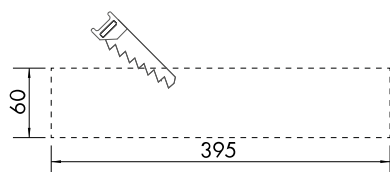

Drilling distances (mm)

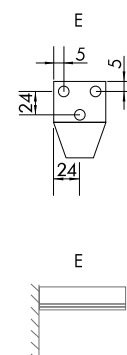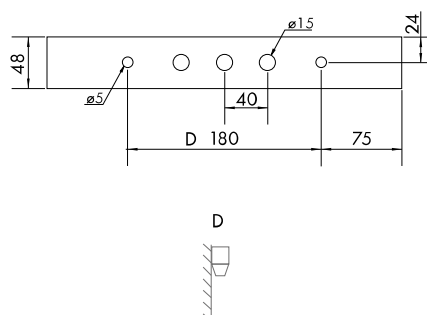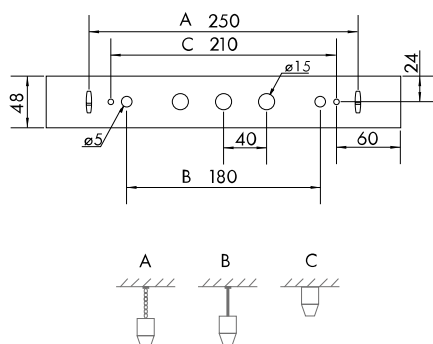

Distance table - min. illumination at the middle line: 1 lx - maintenance factor 0,80 3h autonomy time

Montagehöhe [m]					
2,00	2,86	7,20	6,85	6,40	2,56
2,50	2,98	7,88	7,54	7,12	2,78
3,00	3,11	8,36	8,06	7,69	2,90
3,50	2,94	8,69	8,43	8,10	2,94
4,00	2,13	8,86	8,63	8,36	2,80

Article Table

DESCRIPTION	Order No.
Emerg. Luminaire KE Wireless LED 3h 230V AC uni.m.	NLKEU003WL
Optional Accessories	
Accu NiMH 12V 0,8Ah f.luminaires BusControl, WirelessControl	NLAKKU1208
Recessed Frame f. KE und KX-opal, large cut-out+test button	NLKEE-EB
Design cord suspension 2000mm, 1 pair	NLDSA000
Cord suspension 2000mm, 1 pair	NLCORD2
Cord suspension 4000mm, 1 pair	NLCORD4