

Data Sheet for Article: NLKEU033SC

Emerg.lum. KE 4x1W ERT-LED 3h 230V AC self-control

Universal mounting, 1h/3h/8h adjustable, 1h: 520lm; 3h: 520lm; 8h: 200lm



Technical Data

Net length (mm)	332,00
Net width (mm)	48,00
Net height (mm)	72,00
Net weight (kg)	0,80
Luminaire type	safety luminaire
Self contained - central battery	Self contained luminaire
Function	self controlled
Version	Plastic luminaire
Design	KE
Halogen-free	Housing made of halogen-free plastic
Colour	White
Backup time (h)	3
Illuminant	ERT-LED (4W)
Lumen	1h: 520;3h: 520;8h: 200
Voltage range (V)	230V AC 50Hz ±20%
Battery (V/Ah)	9,6/2,0 NiMh
IP Rating	IP40
Mounting	surface mounting ceiling surface mounting wall recessed mounting ceiling optional universal
AA Class E 8101	AA4


Technical Data - continued

Manufacturer


Schrack

Dimensions (mm)




NLKE...








NLKE... + NLKEE



NLKEE

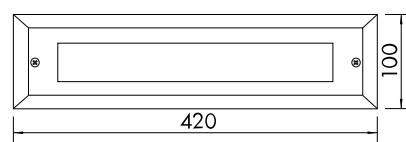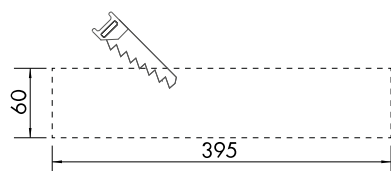

Drilling distances (mm)

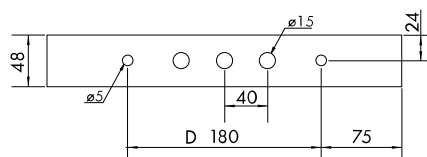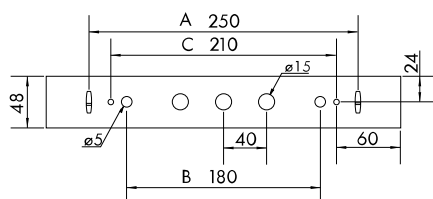

Distance table - min. illumination at the middle line: 1lx - maintenance factor 0,80 - 1h, 3h autonomy time

Montagehöhe [m]					
2,00	8,02	20,31	17,19	7,16	2,86
2,50	9,33	22,81	19,1	7,86	3,09
3,00	9,81	24,91	20,52	8,38	3,22
3,50	10,16	26,78	21,59	8,79	3,26
4,00	10,42	28,26	22,14	9,09	3,36
5,00	10,26	30,36	21,54	9,46	3,24
6,00	8,26	30,94	19,08	9,50	2,92
7,00	4,72	29,70	13,58	9,26	2,42
8,00	4,62	24,42	11,84	8,76	1,56

Distance table - min. illumination at the middle line: 1lx - maintenance factor 0,80 - 8h autonomy time

Montagehöhe [m]					
2,00	6,16	15,98	13,07	5,32	2,00
2,50	6,51	17,57	13,75	5,65	2,02
3,00	6,43	18,71	13,51	5,84	2,02
3,50	5,60	19,23	12,50	5,90	1,86
4,00	3,01	19,00	10,98	5,85	1,70

Article Table

DESCRIPTION	Order No.
Emerg.lum. KE 4x1W ERT-LED 3h 230V AC self-control	NLKEU033SC
Universal mounting, 1h/3h/8h adjustable, 1h: 520lm; 3h: 520lm; 8h: 200lm	
Optional Accessories	
Accu NiMH 9,6V 2,0 Ah for self contained luminaires ERT-LED	NLAKKU9620
Suitable for LPU module	
Recessed Frame f. KE und KX-opal, large cut-out+test button	NLKEE-EB
Design cord suspension 2000mm, 1 pair	NLDSA000
Cord suspension 2000mm, 1 pair	NLCORD2
Cord suspension 4000mm, 1 pair	NLCORD4