

Data Sheet for Article: NLKEU039ML

Lumin.f. CPS KE Mon.all Modes illum.accrossERT-LED 230V uni.

Universalmontage



Technical Data

Luminaire type	safety luminaire
Self contained - central battery	central power supply luminaire
Function	with monitoring and mixing operation
Version	Plastic luminaire
Design	KE
Colour	White
Illuminant	ERT-LED (4W)
Lumen	520
Voltage range (V)	230V AC 50Hz $\pm 20\%$; 230V DC $\pm 20\%$
IP Rating	IP40
Mounting	surface mounting ceiling surface mounting wall recessed mounting ceiling universal


Technical Data - continued

Net weight (kg)


| 0,80

Dimensions (mm)




NLKE...






NLKE... + NLKEE



NLKEE

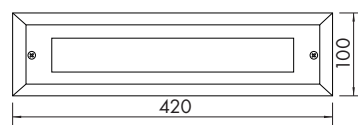

Drilling distances (mm)

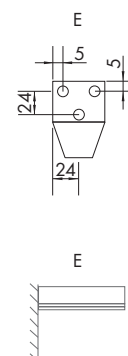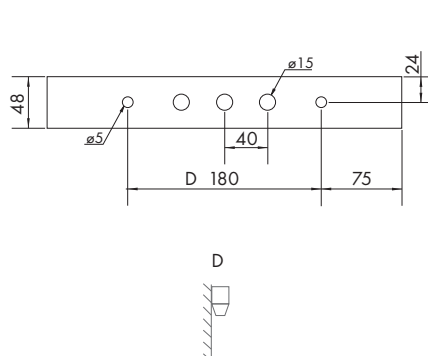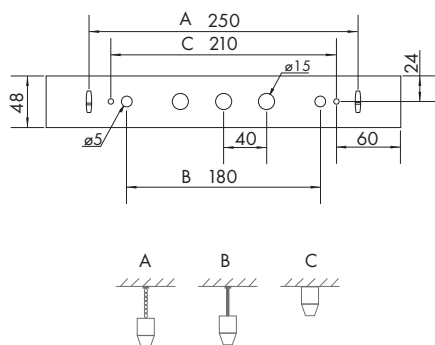

Distance table - min. illumination at the middle line: 1 lx - maintenance factor 0,80

Montagehöhe [m]					
2,00	8,02	20,31	17,19	7,16	2,86
2,50	9,33	22,81	19,1	7,86	3,09
3,00	9,81	24,91	20,52	8,38	3,22
3,50	10,16	26,78	21,59	8,79	3,26
4,00	10,42	28,26	22,14	9,09	3,36
5,00	10,26	30,36	21,54	9,46	3,24
6,00	8,26	30,94	19,08	9,50	2,92
7,00	4,72	29,70	13,58	9,26	2,42
8,00	4,62	24,42	11,84	8,76	1,56

Article Table

DESCRIPTION	Order No.
Lumin.f. CPS KE Mon.all Modes illum.accrossERT-LED 230V uni.	NLKEU039ML
Universalmontage	
Optional Accessories	
Recessed Frame for KE und KX-opal, large cut-out	NLKEE
Pendant pair 500 mm white, prewired	NL2PW
Design cord suspension 2000mm, 1 pair	NLDSA000
Suspension-SET for GLENOS ALU-PROFILE with cover, 2,5m	LI213488