

Data Sheet for Article: NLKMB001SC

Emergency luminaire KMB Autotest LED 3h 230V AC

Universal mounting, with 4x0,5W High Power LED, with LiFePO4 battery, 1h/3h adjustable, 1h: 170lm; 3h: 170lm



Technical Data


Net length (mm)	250,00
Net width (mm)	34,00
Net height (mm)	50,00
Net weight (kg)	0,29
Luminaire type	safety luminaire
Self contained - central battery	Self contained luminaire
Function	self controlled
Version	Plastic luminaire
Design	KMB
Halogen-free	Housing made of halogen-free plastic
Colour	White
Backup time (h)	3
Illuminant	LED (2W)

Technical Data - continued


Lumen	1h: 170;3h: 170
Voltage range (V)	230V AC 50Hz $\pm 20\%$
Battery (V/Ah)	3,2/3,0 LiFePO4
IP Rating	IP54
Impact Resistance	$\geq$ IK03
Mounting	surface mounting ceiling surface mounting wall recessed mounting ceiling optional universal
AA Class E 8101	AA4
Manufacturer	Schrack

Abmessungen (mm)

NLKMB...

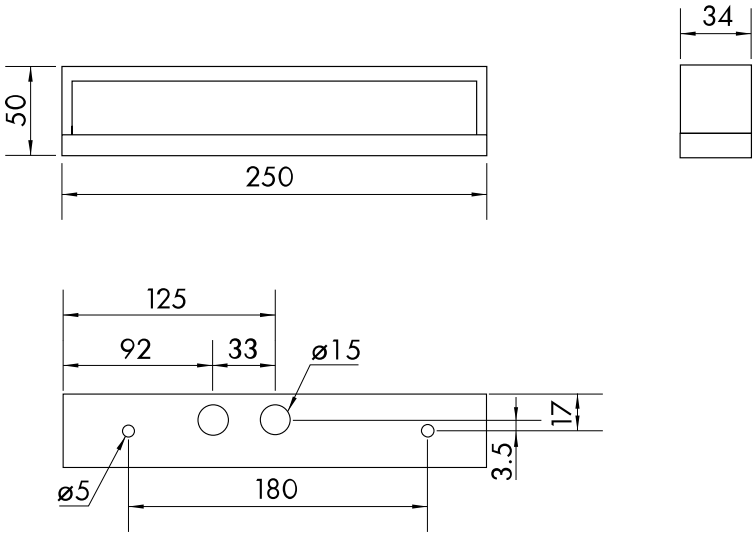

NLKME

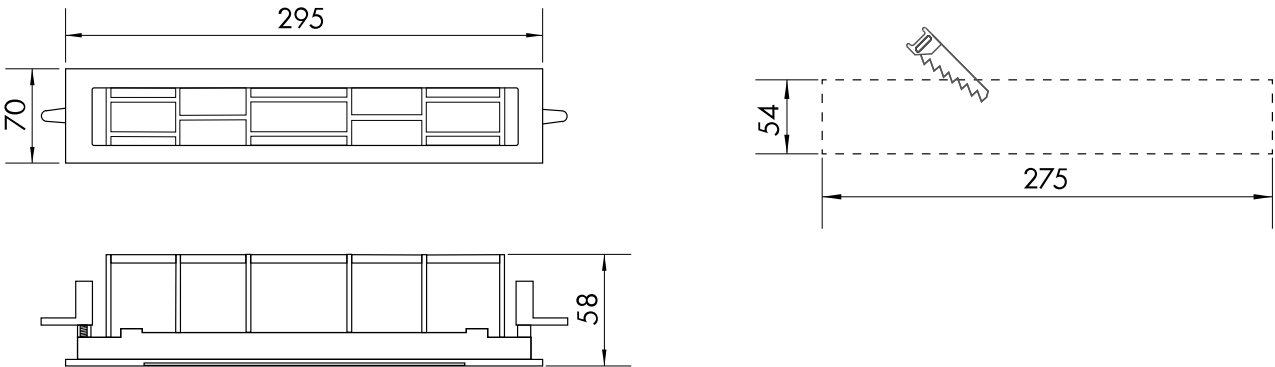

Abstandstabelle - Min. Beleuchtungsstärke auf der Mittellinie: 1lx - Wartungsfaktor 0,80 - 1h-3h Autonomiezeit

Montagehöhe [m]					
2,00	1,56	4,37	7,50	10,72	4,49
2,50	1,56	4,61	8,34	12,09	4,91
3,00	1,53	4,41	8,85	13,29	5,41
3,50	1,49	4,44	9,32	14,36	5,82
4,00	1,49	4,48	9,80	15,32	3,60

Abstandstabelle - Min. Beleuchtungsstärke auf der Mittellinie: 1lx - Wartungsfaktor 0,80 - 8h Autonomiezeit

Montagehöhe [m]					
2,00	1,02	2,96	5,91	8,87	3,61
2,50	1,01	2,99	6,39	9,92	4,00
3,00	0,80	2,96	5,09	9,49	2,10
3,50	0,43	2,88	4,57	9,24	1,41
4,00	0,00	2,61	3,91	6,44	0,00

Article Table

DESCRIPTION	Order No.
Emergency luminaire KMB Autotest LED 3h 230V AC Universal mounting, with 4x0,5W High Power LED, with LiFePO4 battery, 1h/3h adjustable, 1h: 170lm; 3h: 170lm	NLKMB001SC
Optional Accessories	
Recessed frame white for CPS emergency luminaires KM,KMB,KS	NLKME
Wall bracket white for luminaires Design KM/KS	NLAWKSU
Accu LiFePO4 3,2V 3,3Ah for LED luminaire KM,KSC,KMB,ASM,ZAW LiFePO4 - Lithium-iron phosphphate battery , UN3480 - UN 3480 : Lithium-Ion batteries, compatible to accu 3,2V 3,3Ah	NLAKKU3230
Design pair of pendants 500 mm white, wired Suitable for design KS, KM, KMB in self contained version with LiFePO4 battery	NL2DWKMKS
Design cord suspension 2000mm, 1 pair	NLDSA000
Cord suspension 2000mm, 1 pair	NLCORD2
Cord suspension 4000mm, 1 pair	NLCORD4