

Data Sheet for Article: NLKMB008WB

Emerg.lum.KMB 4x0,5W HighPowerLED 8h 230V AC WirelessConnect

White, universal mounting, with LiFePO4 battery, emergency luminaire, with Bluetooth communication., 85lm



Technical Data



Net length (mm)	250,00
Net width (mm)	34,00
Net height (mm)	50,00
Net weight (kg)	0,29
Luminaire type	safety luminaire
Self contained - central battery	Self contained luminaire
Function	WirelessConnect
Version	Plastic luminaire
Design	KMB
Halogen-free	Housing made of halogen-free plastic
Colour	RAL 9003 (white)
Backup time (h)	8
Illuminant	LED (2W)

Technical Data - continued




Lumen	85
Voltage range (V)	230V AC 50Hz $\pm 20\%$
Power maintained mode (W)	3,90
Power non-maintained mode (W)	1,50
Power max. (W)	5,30
Battery (V/Ah)	3,2/3,3 LiFePO4
IP Rating	IP54
Impact Resistance	$\geq$ IK03
Mounting	surface mounting ceiling surface mounting wall recessed mounting ceiling optional universal
Min. ambient temperature (°C)	-5
Max. ambient temperature (°C)	40
AA Class E 8101	AA4
Manufacturer	Schrack

Dimensions (mm)

NLKMB...

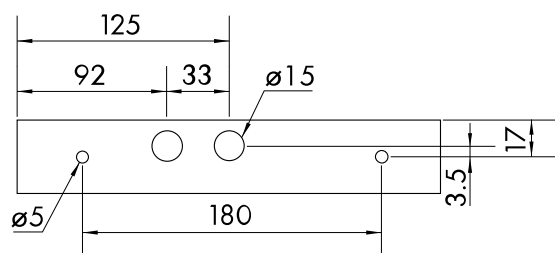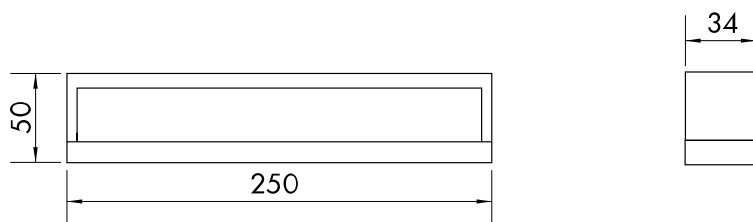

NLKME

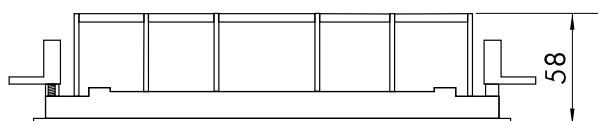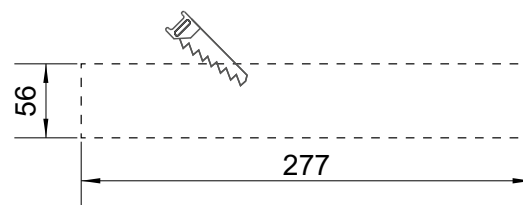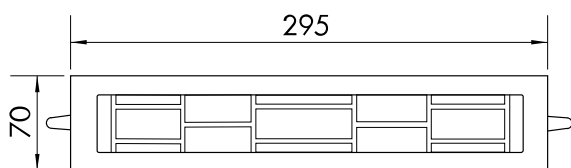

**Spacing table - Min. illuminance on the center line +/- 0.5 m: 1 lx -
Maintenance factor 0.80 - Autonomy time 8h**

					
2,00	1,11	3,14	5,98	8,83	3,65
2,50	1,08	3,14	6,47	9,90	3,95
3,00	0,98	3,16	5,15	9,46	2,11
3,50	0,66	3,08	4,70	9,30	1,44

Article Table

DESCRIPTION	Order No.
Emerg.lum.KMB 4x0,5W HighPowerLED 8h 230V AC WirelessConnect White, universal mounting, with LiFePO4 battery, emergency luminaire, with Bluetooth communication., 85lm	NLKMB008WB
Optional Accessories	
Recessed frame white for CPS emergency luminaires KM,KMB,KS Required ceiling cut out: 277 x 56 mm	NLKME
Wall bracket white for luminaires Design KM/KS	NLAWKSU
Accu LiFePO4 3,2V 3,3Ah for LED luminaire For design KM, KSC, KMB, ASM, ZAW, NLILL.23., LiFePO4 - Lithium-iron phoshpate battery , UN3480 - UN 3480 : Lithium-Ion batteries, compatible to accu 3,2V 3,3Ah	NLAKKU3230
Design pair of pendants 500 mm white, wired Suitable for design KS, KM, KMB in self contained version with LiFePO4 battery	NL2DWKMKS
Ball Protection for KD, KM, KS,LM, VM, RI, RM l x h x d: 320 x 220 x 120mm	NLBALL1
Design cord suspension 2000mm, 1 pair	NLDSA000
Cord suspension 2000mm, 1 pair	NLCORD2
Cord suspension 4000mm, 1 pair	NLCORD4