

Emergency luminaire KMB Autotest LED 3h 230V AC, white

Universal mounting, with 4x0,5W High Power LED, with LiFePO4 battery, emergency luminaire for illuminating escape routes, 1h/3h/8h adjustable, 1h: 190lm; 3h: 190lm; 8h: 85lm



Technical Data



Net length (mm)	250,00
Net width (mm)	34,00
Net height (mm)	50,00
Net weight (kg)	0,29
Luminaire type	safety luminaire
Self contained - central battery	Self contained luminaire
Function	self controlled
Version	Plastic luminaire
Design	KMB
Halogen-free	Housing made of halogen-free plastic
Colour	RAL 9003 (white)
Backup time (h)	3

Technical Data - continued




Illuminant	LED (2W)
Lumen	1h: 190;3h: 190;8h: 85
Voltage range (V)	230V AC 50Hz $\pm 20\%$
Power maintained mode (W)	3,30
Power non-maintained mode (W)	1
Power max. (W)	4,60
Battery (V/Ah)	3,2/3,0 LiFePO ₄
IP Rating	IP54
Impact Resistance	$\geq$ IK03
Mounting	surface mounting ceiling surface mounting wall recessed mounting ceiling optional universal
Min. ambient temperature (°C)	-5
Max. ambient temperature (°C)	40
AA Class E 8101	AA4
Manufacturer	Schrack

Abmessungen (mm)

NLKMB...

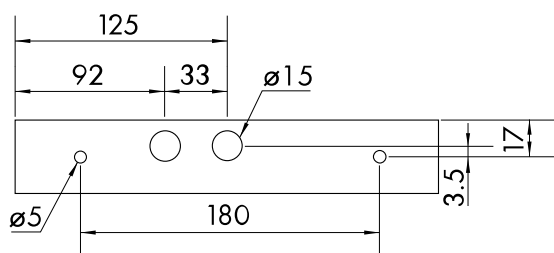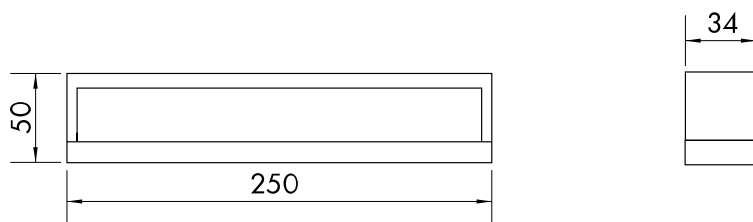

NLKME

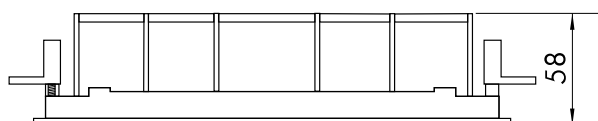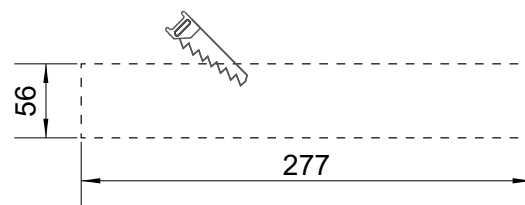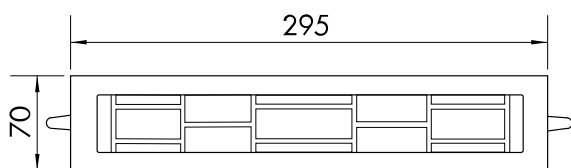

Abstandstabelle - Min. Beleuchtungsstärke auf der Mittellinie +/- 0,5m: 1lx - Wartungsfaktor 0,80, 1h/3h Autonomiezeit

					
2,00	1,66	4,42	7,55	10,74	4,54
2,50	1,64	4,76	8,42	12,16	5,10
3,00	1,67	4,74	9,08	13,39	5,57
3,50	1,63	4,65	9,52	14,49	5,97
4,00	1,59	4,72	10,03	15,48	3,78
5,00	1,19	4,62	7,33	14,22	2,89

Abstandstabelle - Min. Beleuchtungsstärke auf der Mittellinie +/- 0,5m: 1lx - Wartungsfaktor 0,80, 8h Autonomiezeit

					
2,00	1,11	3,14	5,98	8,83	3,65
2,50	1,08	3,14	6,47	9,90	3,95
3,00	0,98	3,16	5,15	9,46	2,11
3,50	0,66	3,08	4,70	9,30	1,44

Article Table

DESCRIPTION	Order No.
Emergency luminaire KMB Autotest LED 3h 230V AC, white	
Universal mounting, with 4x0,5W High Power LED, with LiFePO4 battery, emergency luminaire for illuminating escape routes, 1h/3h/8h adjustable, 1h: 190lm; 3h: 190lm; 8h: 85lm	NLKMB403SC
Optional Accessories	
Recessed frame white for CPS emergency luminaires KM,KMB,KS	NLKME
Required ceiling cut out: 277 x 56 mm	
Wall bracket white for luminaires Design KM/KS	NLAWKSU
Accu LiFePO4 3,2V 3,3Ah for LED luminaire	
For design KM, KSC, KMB, ASM, ZAW, NLILL.23., LiFePO4 - Lithium-iron phosphates battery, UN3480 - UN 3480 : Lithium-Ion batteries, compatible to accu 3,2V 3,3Ah	NLAKKU3233
Design pair of pendants 500 mm white, wired	NL2DWKMKS
Suitable for design KS, KM, KMB in self contained version with LiFePO4 battery	
Design cord suspension 2000mm, 1 pair	NLDSA000
Cord suspension 2000mm, 1 pair	NLCORD2
Cord suspension 4000mm, 1 pair	NLCORD4